



RECOMMENDED
CABLE STRIPPING DIM'S

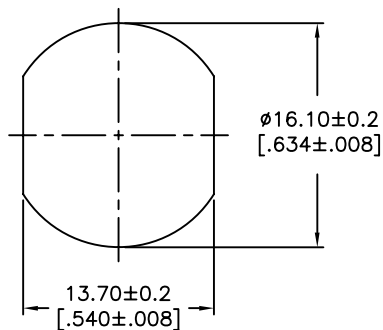

RECOMMENDED
MOUNTING HOLE

REV.	DATE	ECR NO.	DESCRIPTION
NC	07/30/09	XXXXXX	INITIAL RELEASE

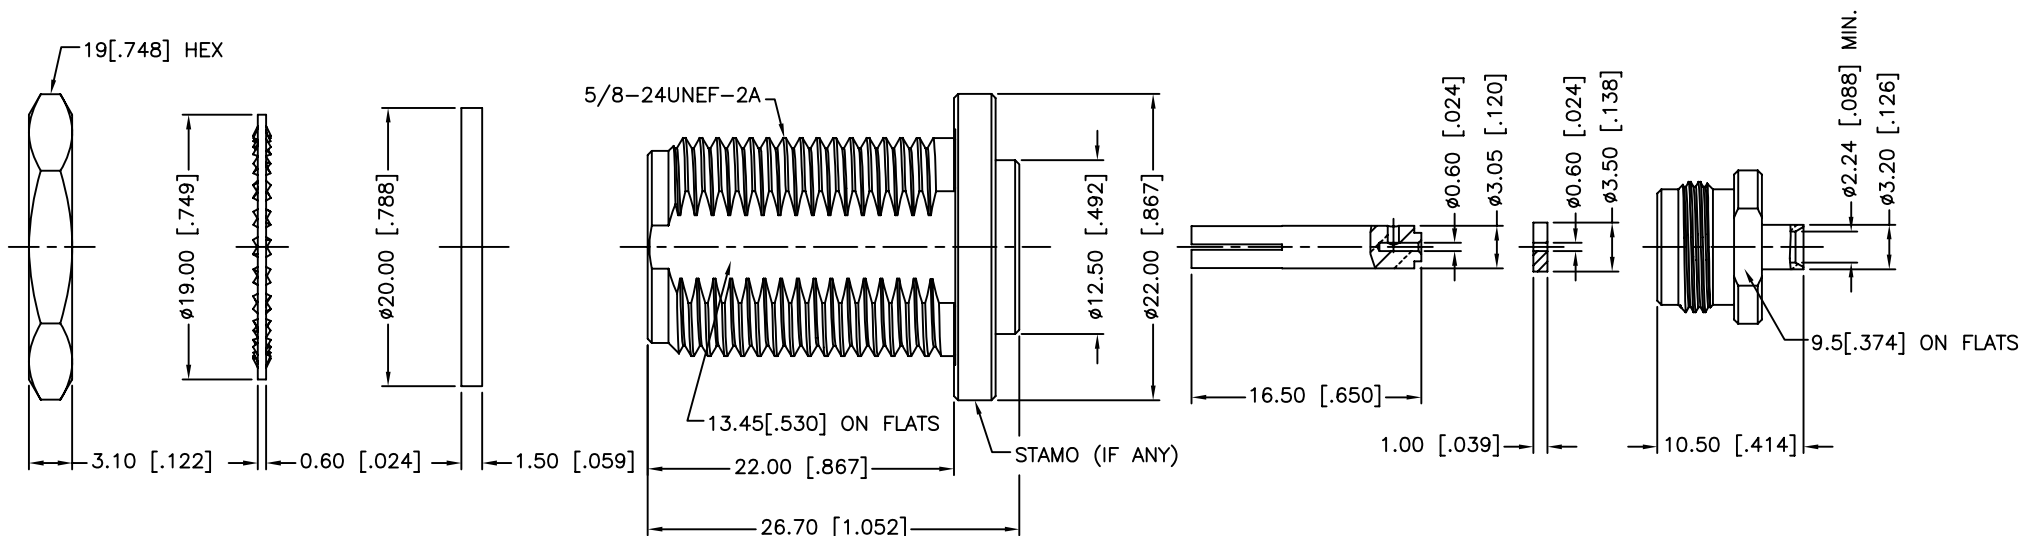

1. CONTACT PIN TO SOLDER
2. MAX PANEL THICKNESS: 6.5 mm

9	HEX NUT	BRASS	NEXCOTE	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	APPROVALS		DATE		Amphenol Connex							
8	LOCK WASHER	BRASS	NEXCOTE	1		DRAWN	M.ZHANG	07/30/09									
7	GASKET	SILICONE	RED	1		CHECKED				PART DESCRIPTION N BULKHEAD DIRECT SOLDER JACK (FOR .085”,.086” CABLE)							
6	SOLDER NUT	BRASS	GOLD	1		ISSUED											
5	INSULATOR	PTFE	NATURAL	1		SHEET		1 OF 1									
4	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1	DO NOT SCALE DRAWING	CAD FILE		PART NO. 172138									
3	INNER BODY	BRASS	NEXCOTE	1		C:/CONNEX/172138.DWG		DWG. NO.		172138.DWG		REV.	NC	SIZE	A	SCALE	NA
2	INSULATOR	PTFE	NATURAL	1													
1	OUTER BODY	BRASS	NEXCOTE	1													
	DESCRIPTION	MATERIAL	FINISH	QTY													