


Features:



- Integrally molded polarization
- Material: UL 94V-2
- Friction lock
- Standard color: Nature
- Recommended panel thickness: .030" ~ .090"(0.762 ~ 2.286mm)

Specifications:

- Current rating: 13A
- Voltage rating: 600V
- Insulation resistance: 1000M Ω Min.
- Dielectric withstanding voltage: 5000V AC/minute
- Ambient temperature range: -55°C ~ 105°C

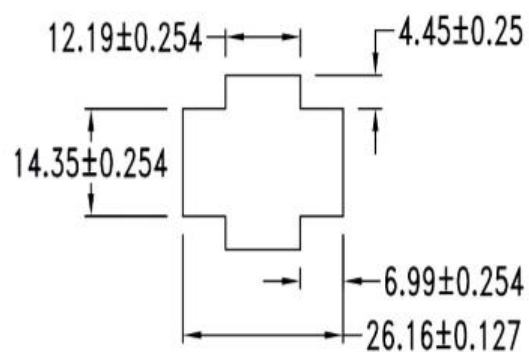

&& Panel must be punched so that housing enters panel in same direction as the punch.

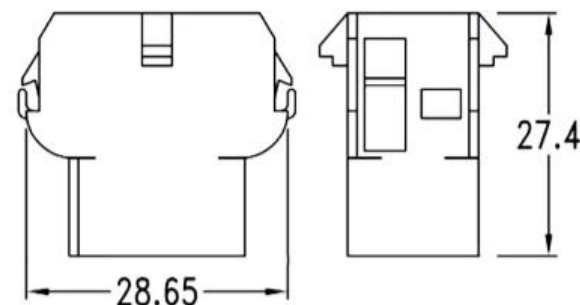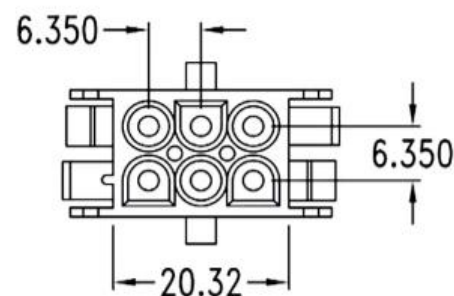

RoHS Compliant		NINIGI	
APPRO. 核准	SCALE 比例	TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖	比例 參考	.0 +0.4 .00 +0.25 ANG. *	6.35mm FEMALE HOUSING 2X3P NYLON66 WHITE INSULATOR ROHS
DATE 制表日	UNIT 單位	SIZE 版張尺寸	PART NO. 料號
2014/8/20	M M	A 4	NLSG-2X3
PAGE 張數	1 OF 1	REV. 版本	A