
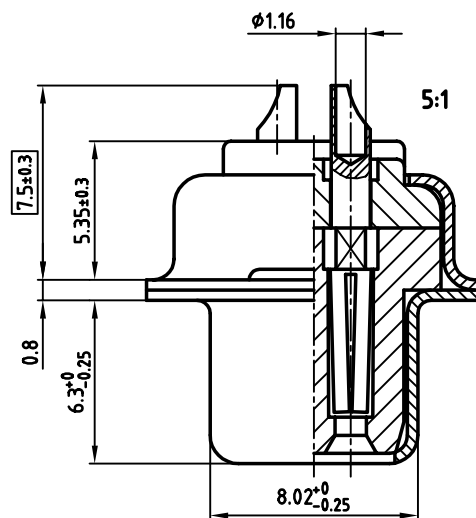
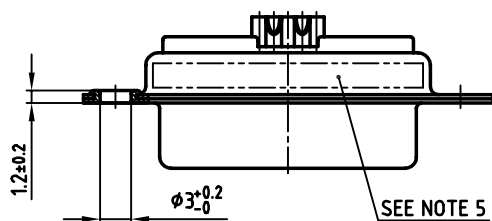


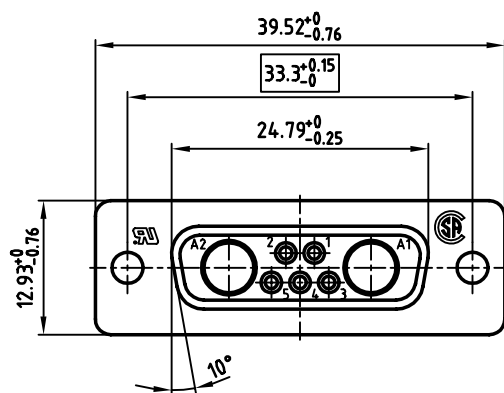

NOTES:

- METALSHELLS: STEEL; min. 320µ" TIN
- INSULATORS: PBT GF UL 94 V-0, GREEN
- SIGNAL CONTACTS: COPPER ALLOY
SOLDER CUP ACCEPTS CABLE AWG 20
- PLATING: min. 30µ" HARD GOLD OVER min. 50µ" NICKEL
- CONNECTOR IS PART MARKED: **3007W2SCM99A10X CONEC_Y/WW**
- = CRITICAL DIMENSION

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND				tolerance			scale: 2:1				
							material: SEE NOTES				
								2002	date	name	title: D-SUB COMBINATION FEMALE 7W2S SOLDER CUP
								drawn	07.05.	Parei	
								appd.	07.05.	E. Mickenbecker	
								norm			
				d-old			dwg no: AutoCAD 2000 DIN-A 13K1A563 3 sh: 1/1				
											
rev.	description	date	name					part no: 3007W2SCM99A10X			

Directive 2002/95/EC
„RoHS“
Compliant