

Drg No :- C 44044

SPECIFICATION

ACTUATING FORCE:-3.9N(14ozf)MAX

RELEASE FORCE :- 1.1N(4.0ozf)MIN

FREE POSITION :- 15.9 (0.63)MAX

OPERATING POSITION :- 14.5 ± 0.5 (0.57)


MOVEMENT DIFFERENTIAL:-0.4(0.016)MAX

OVERTRAVEL :- DEPRESS TO CASE (AVAILABLE)


TESTED AND STAMPED TO U.L.
CSA & ENEC 14 REQUIREMENTS

APPROVAL RATING :-
5AMP - 250 V.A.C.

DIAGRAM OF CONNECTIONS

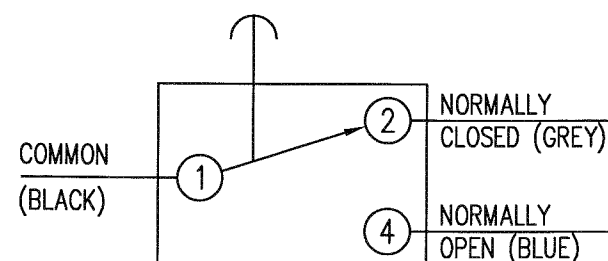

INSTALLATION DRAWING

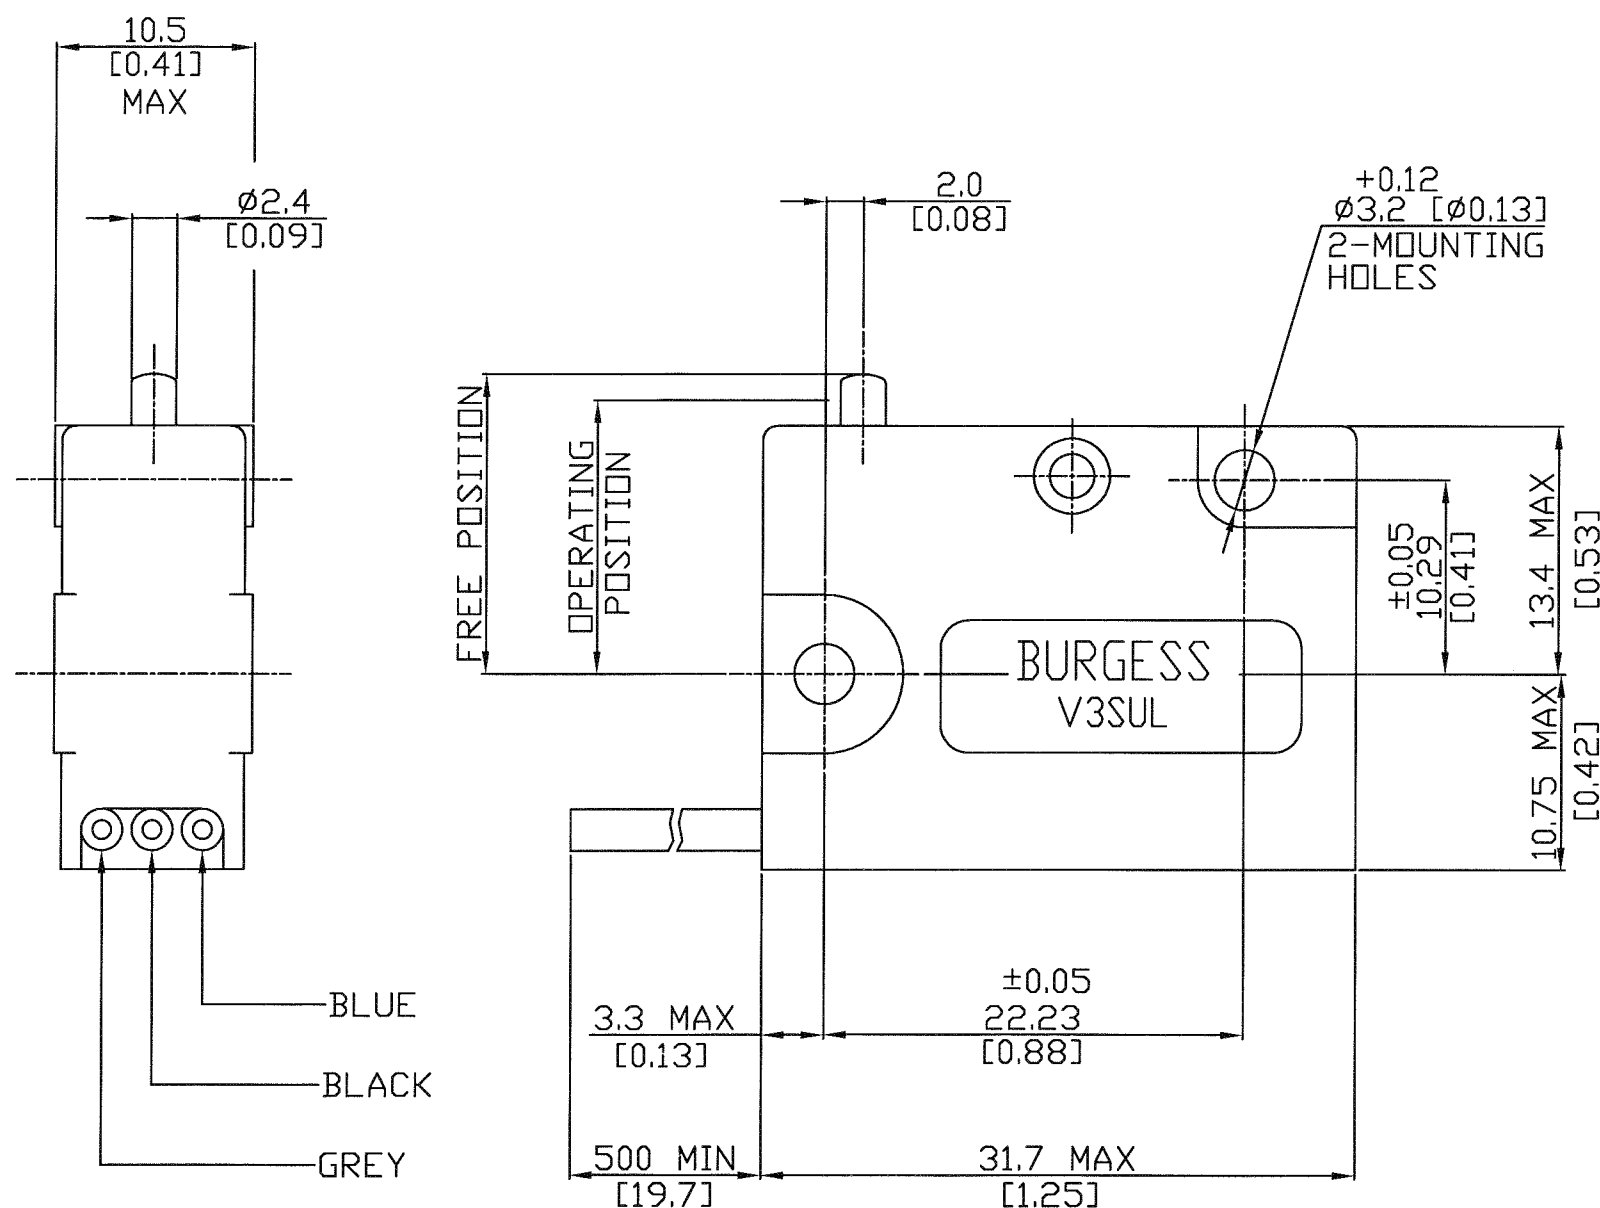

DEGREE OF PROTECTION :- ENCLOSURE IEC IP67

ISSUE	REVISION	DATE
1	FIRST ISSUE	19/7/00
2	See DPCA 15761	04/08/06

SAIA-Burgess Electronics

SWITCHES•MOTORS•CONTROLLERS

SAIA-Burgess Electronics Limited
Dukesway, Team Valley Trading Estate
Gateshead, Tyne & Wear NE11 0UB
Tel: (0191)4016100, Fax: (0191)4016322



THIRD ANGLE
PROJECTION

DO NOT SCALE !

This drawing must only be
amended on CAD system

TOLERANCES UNLESS STATED:-

NO DECIMAL PLACE ± 0.50 1 DECIMAL PLACES ± 0.25

2 DECIMAL PLACES ± 0.15 ANGULAR $\pm 1^\circ$

INCH - OUNCE UNITS (IN BRACKETS)

ALL DIMENSIONS SPECIFIED IN MILLIMETRES

DRAWN	T.BELL.	Approved
DATE	19/7/00	DRAWING OFFICE
SCALE	2/1	ENGINEERING
DATE ISSUED		QUALITY ASSURANCE

TITLE / DESCRIPTION

V3S UL

Drg No :- C 44044

A3