




Rating	16A 12V DC			Mounting Hole	
Contact Resistance	50m ohm Max.				
Insulation Resistance	DC 500V 100M ohm Min.				
Dielectric Strength	AC 1500V 1 minute				
Operation Temperature	-20° C-85° C				
Switch Function	4P SPST ON-OFF (LED Independent)	Thickness			
		0.75..1.25	X 19.2-0.1	Y 13+0.1	
		1.25..2	19.4-0.1	13+0.1	
		2...3	19.8-0.1	13+0.1	
LED Rating Green:@20mA,If=2.2VDC					



Material:
Frame: Black, Nylon 66
Actuator: Black, Nylon 66
Lens: Green, PC
Lamp: LED(Green)

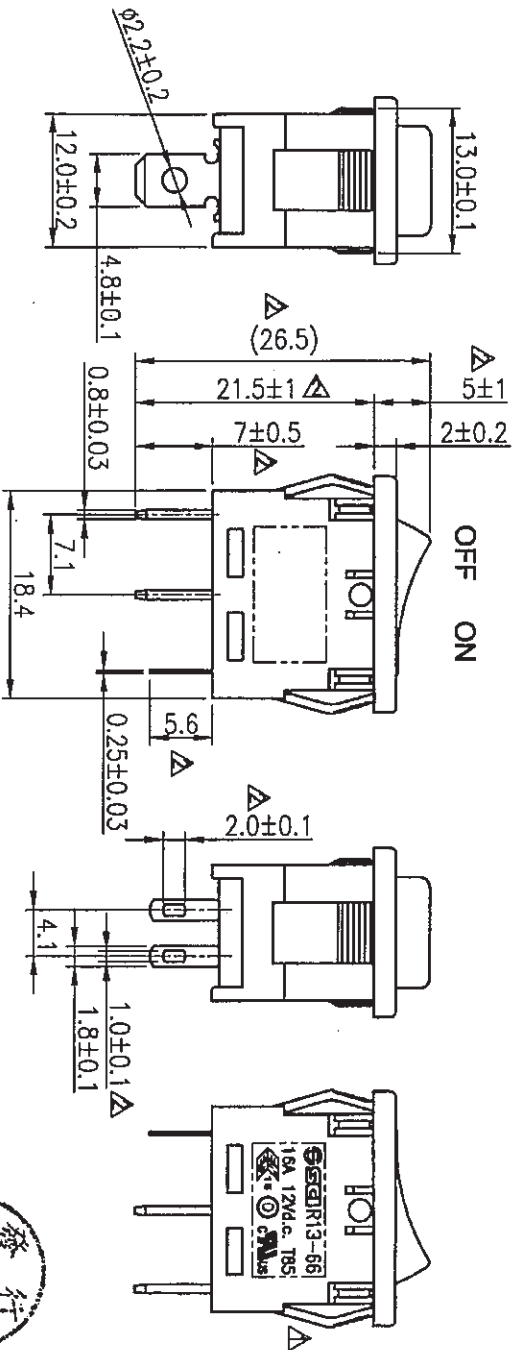

Tolerances Unless Otherwise Specified ±0.3

		1.0=>1.0±0.1,2.0=>2.0±0.1,刪除尺寸20.1±0.5,增加尺寸5.6.				△
02/22/13	柳新強	修正尺寸:19.7±1=>21.5±1,5.2±1=>5±1,7.2±0.5=>7±0.5,(24.9)=>(26.5),				△
09/25/12	張東	更新本體刻字				△
Date	Name	Description				No.
Drawn	Checked	Approved	SCI BOM No.	1821411	Model Name	ROCKER SWITCH
柳新強	張東	張東	Customer No.		Model No.	R13-66L-02
02/22/13	2013-12	2013-13	Unit	mm	Shin Chin Industrial Co., Ltd.	
						2