

5

4

3


2

1


Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

No. 1 contact

12,5 max.

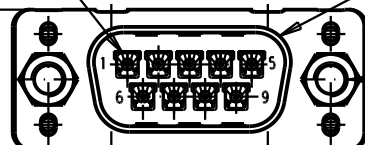

screw lock thread



Printed board layout
component side

4 x 2,74 = 10,96

3 x 2,74 = 8,22

2,74

No.1 contact

ø3,1 ± 0,1 ⊕ ø0,1

No.9 contact

ø1 ± 0,1 ⊕ ø0,05

No.6 contact


2,74

25

max. 3,2

6,2

0,6

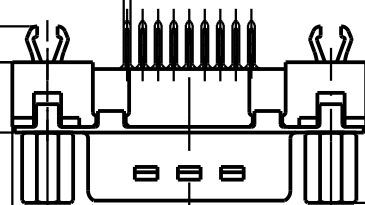


25 ± 0,1

31,2 max.

6,2

Connector retention and insertion forces on the PCB = 25 / 80 newtons

09 65 161 3733	M3	1					Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, 9 poles, male, straight with solder pins 3.7, screw lock and grounding board lock.	Maßstab/ Scale 1,5:1
09 65 161 6733	M3	2				Detail.	07-FEB-02	JB			
09 65 161 7733	M3	3				Insp.					
09 65 161 3713	4-40 UNC	1	31892	22/04/04	JH	Stand.					
09 65 161 6713	4-40 UNC	2	29723	05-MAR-02	CV	HARTING EURL F-95972 Paris				TB 09 65 161 X7X3	Blatt/ Page 1 /
09 65 161 7713	4-40 UNC	3	29746	07-FEB-02	JB						
Part number	Screw lock thread	Performance level	Mod.	Dat.	Name				Sub.		