


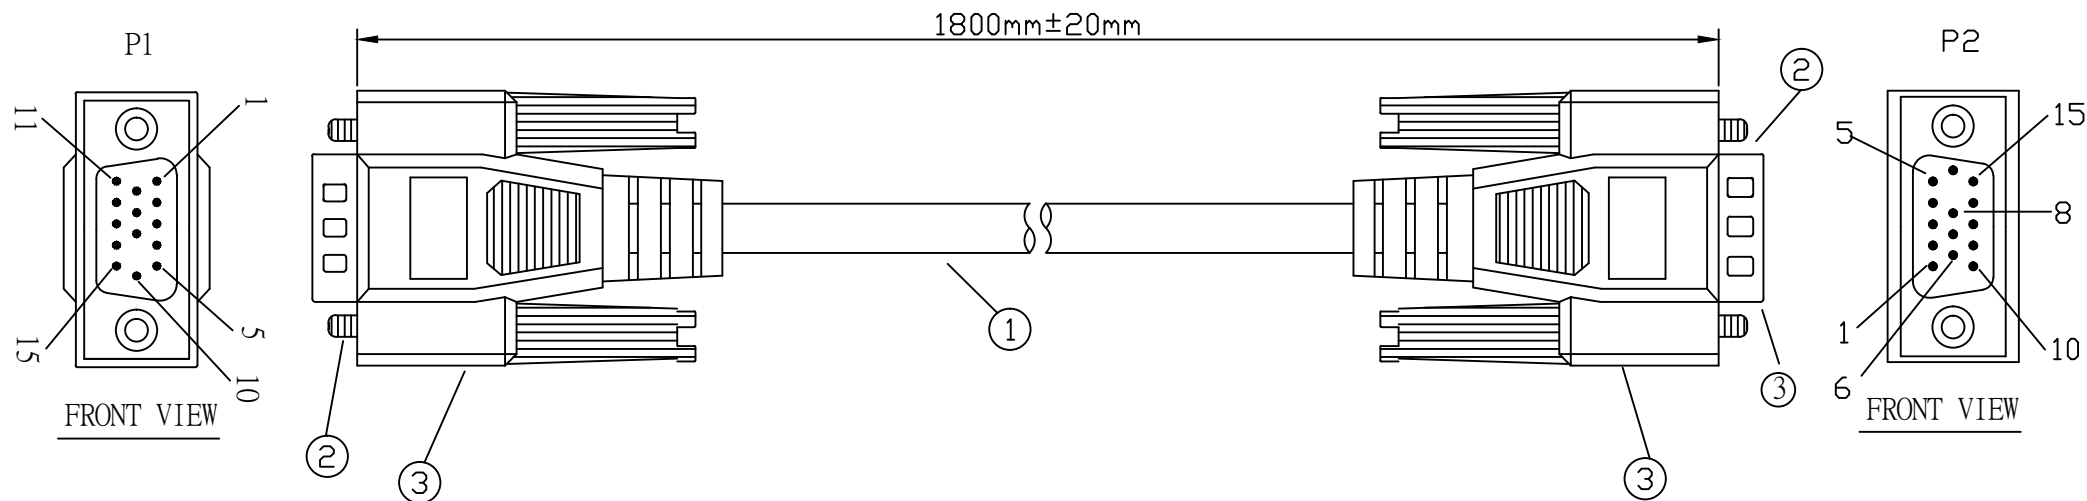

DRAWING

HDD15PIN PLUG(P1)	WIRE	HDD15PIN PLUG(P2)
1	_____	1
2	_____	2
3	_____	3
4	_____	4
5	_____	5
6	_____	6
7	_____	7
8	_____	8
10	_____	10
11	_____	11
12	_____	12
13	_____	13
14	_____	14
15	_____	15
SHELL	D.W	SHELL

- 1.CABLE:NO UL 14C+1.<(28AWG,7/0.12mm±0.008)×14C
SHIELD:DRAIN WIRE+AL/MY COVERAGE
JACKET:PVC,COMPLIANCE ROHS,COLOR:BEIGE,Ø.D:6mm±0.2mm
- 2.CONNECTOR:2 PCS HDD15 PIN MALE SOLDER TYPE CONNECTOR
SHELL:NICKEL PLATED
- 3.HOOD:PVC MOLDED TYPE WITH AL-FOIL SHIELDED ON INNER
MOLD INJECTION OUTER MOLD WITH THUMB SCREW#4-40UNC
HOOD COLOR IS BEIGE,COMPLIANCE ROHS
- 4.Fulfill ROHS Guideline
- 5.ELECTRONIC TEST: 100% OPEN SHORT+MISS WIRE TEST

PART NO	C-15WWHD/1,8	SHEET NO	1	THIRD ANGLE PROJECTION
TITLE: HDD15 PIN PLUG TO HDD15 PIN PLUG BEIGE COLOR,L:1.8M				SCALE N.T.S
				DRAWN BY & DATE
				CHECKED BY & DATE
DWN NO				UNIT
				APPROVED BY & DATE
D-C-15WWHD/1,8				mm INCH

