


圖號 DRAWING No. :				校訂版次 REVISIONS			
品名 NAME:Female		ITEM No. :		版次	記述 DESCRIPTION	DATE	核可
				1	修改公差	106.09.27	ANDY
				2	尺寸修改	109/04/30	KEN
NOTE: 1. MAXIMUM ELECTRICAL RATING: 105°C 300 VOLTS 2. WIRE RANGE: 22-16 AWG / 0.5-1.5 mm² INSULATED COLOR: RED 3. WIRE RANGE: 16-14 AWG / 1.5-2.5 mm² INSULATED COLOR: BLUE 4. WIRE RANGE: 12-10 AWG / 4-6 mm² INSULATED COLOR: YELLOW 5. MATERIAL THICKNESS: t TOLERANCE: ±0.05							

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	NEMA TAB	B	F ±0.30	L ±1.00	E	D ±0.30	d1 ±0.20	t
22-16 AWG 0.5-1.5 mm ²	B	0.5x2.8	3.2±0.30	6.4	18.5	10.0	4.0	1.7	0.25
	B ST-001/R	0.8x2.8	3.2±0.30	6.4	18.5				0.25
	A	0.5x4.8	5.0±0.20	6.5	19.0				0.35
	A	0.8x4.8	5.0±0.20	6.5	19.0				0.35
	A	0.8x6.4	6.6±0.20	7.9	21.0				0.4
	A	0.8x8.0	8.4±0.20	10.0	24.0				0.4
16-14 AWG 1.5-2.5 mm ²	B	0.5x2.8	3.2±0.30	6.4	18.5	10.0	4.5	2.3	0.25
	B	0.8x2.8	3.2±0.30	6.4	18.5				0.25
	A	0.5x4.8	5.0±0.20	6.5	19.0				0.35
	A	0.8x4.8	5.0±0.20	6.5	19.0				0.35
	A	0.8x6.4	6.6±0.20	7.9	21.0				0.4
	A	0.8x8.0	8.4±0.20	10.0	24.0				0.4
	A	1.2x9.5	9.9±0.20	12.5	26.0				0.5
	A	0.8x6.4	6.6±0.20	7.9	24.0				0.4
12-10 AWG 4-6 mm ²	A	0.8x6.4	6.6±0.20	7.9	24.0	13.0	5.5	3.4	0.4
	A	1.2x9.5	9.9±0.20	12.5	29.0				0.5




MAXIMUM ELECTRIC CURRENT


A. W. G	22	20	18	16	14	12	10
MAX AMP	3	4	7	10	15	20	24

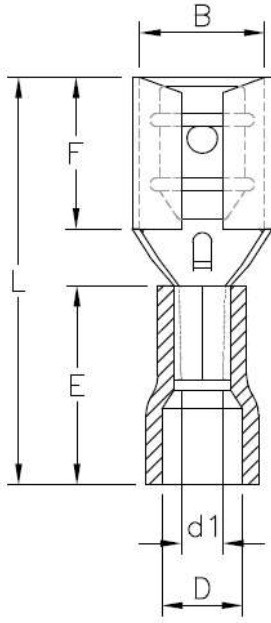

A



B

認可 APPROVALS		第三視角 THIRD VIEW	MATERIAL	單位 UNIT	日期 DATE: 2015.01.05
製圖 DRAFT:	TINA		INSULATION: VINYL	m/m	
設計 DESIGN:	KEN		MATERIAL: BRASS	比例 SCALE	
核可 CHECKED:	KEN		TIN PLATING		