

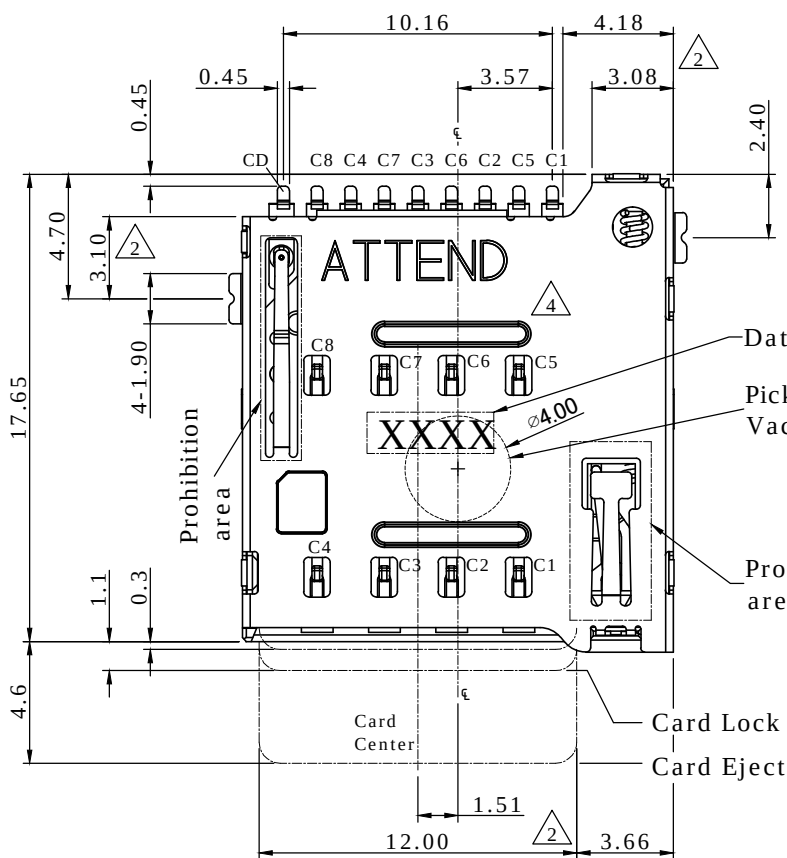
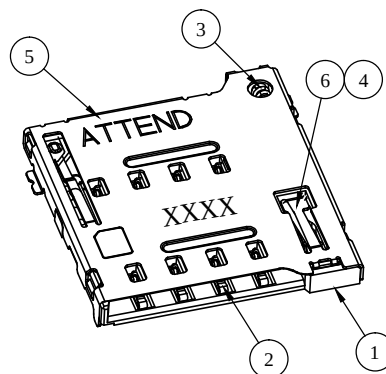


△₃ Date Code: X XX X
year week(1~52) day(1~7)

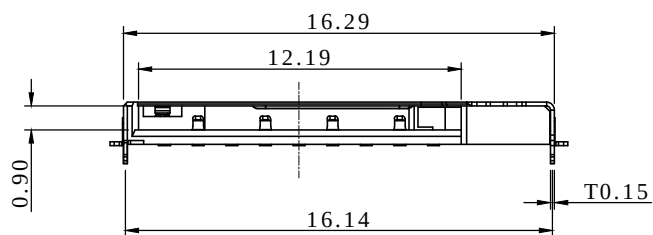

Prohibition area
High
H0.50

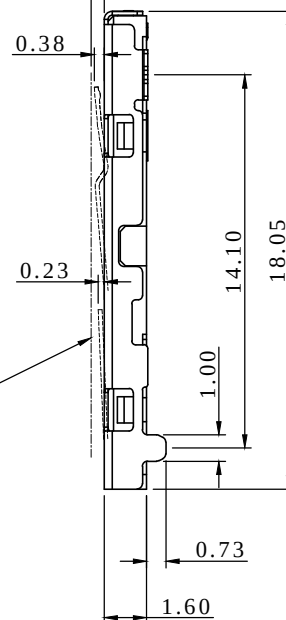

REV.	DESCRIPTION	DRAWN	DATE
3	Revised datecode	FROS	2016/08/19
4	ECR1800010 add Rib	FROS	2018/05/10
5	ECR2100001	FROS	2021/01/21

SPECIFICATION:

1. ELECTRICAL

1.1 Current Rating: 0.5A DC/AC

1.2 Voltage Rating: 10V DC/AC

1.3 Contact Resistance:

C1~C8: 100mΩ Max.

CD: 140mΩ Max.

1.4 Insulation Resistance: 1000MΩ Min.

1.5 Dielectric Withstanding Voltage:

500VAC for 1 minute

2. MECHANICAL

2.1 Durability: 5,000 Cycle

2.2 Insertion Force: 10N Max.

2.3 Extraction Force: 0.5N Min.

3. ENVIRONMENTAL

3.1 Operating temperature range: -40℃~+85℃

3.2 Storage temperature range: -40℃~+85℃

△ ₅ △ ₂		
6	SLIDER	LCP E130i, UL94V-0, Black
5	SHELL	SUS304CSP-3/4H, 0.15t, 50u" nickel plated
4	CRANK	SUS304, 0.35d
3	SPRING	SWP-B, 0.20d, 65u" nickel Plating over all
2	CONTACT	C5210R-H, 0.12t, 5u" gold on contact area 1u" gold on tail area, under plated: 50u" nickel
1	HOUSING	LCP E130i, UL94V-0, Black
NO.	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE

UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°



WWW.ATTEND.COM.TW

DRAWN: Fros

CHECKED: Ron

APPROVED: Albert

SCALE: 3.5/1

SHEET: 1/4

SIZE: A4


DRAWN NAME:
Micro SIM Card Socket
push-push type


PRODUCT NO.


115Q-BCA0

FILE NAME

115Q-BCA0_B_5

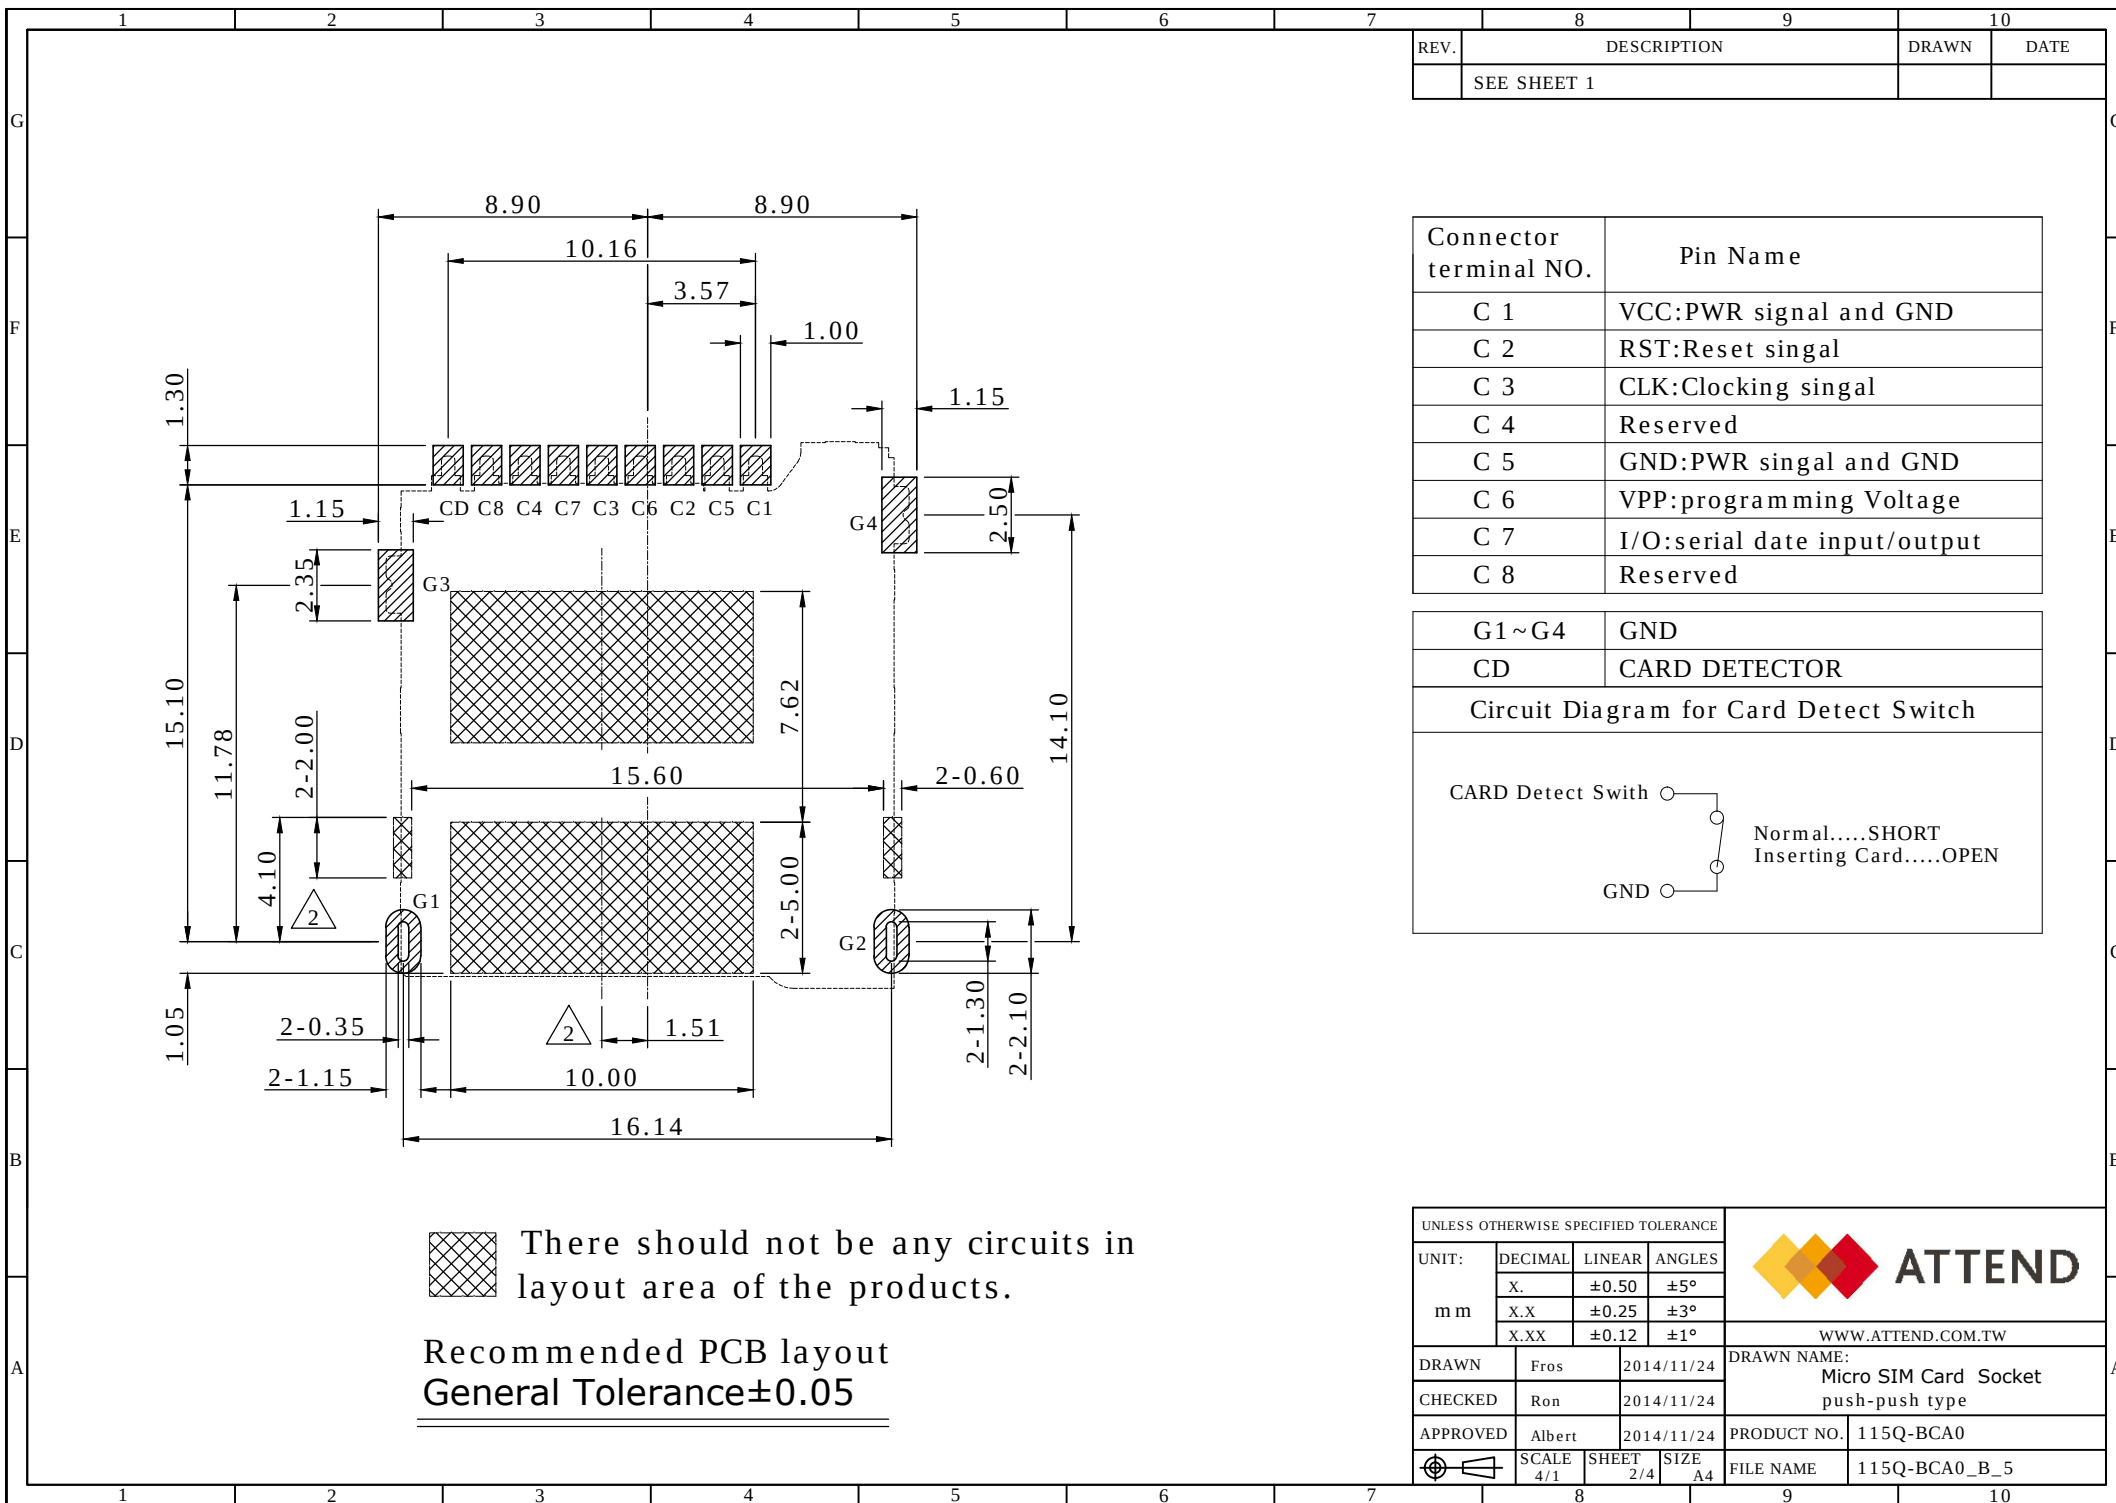

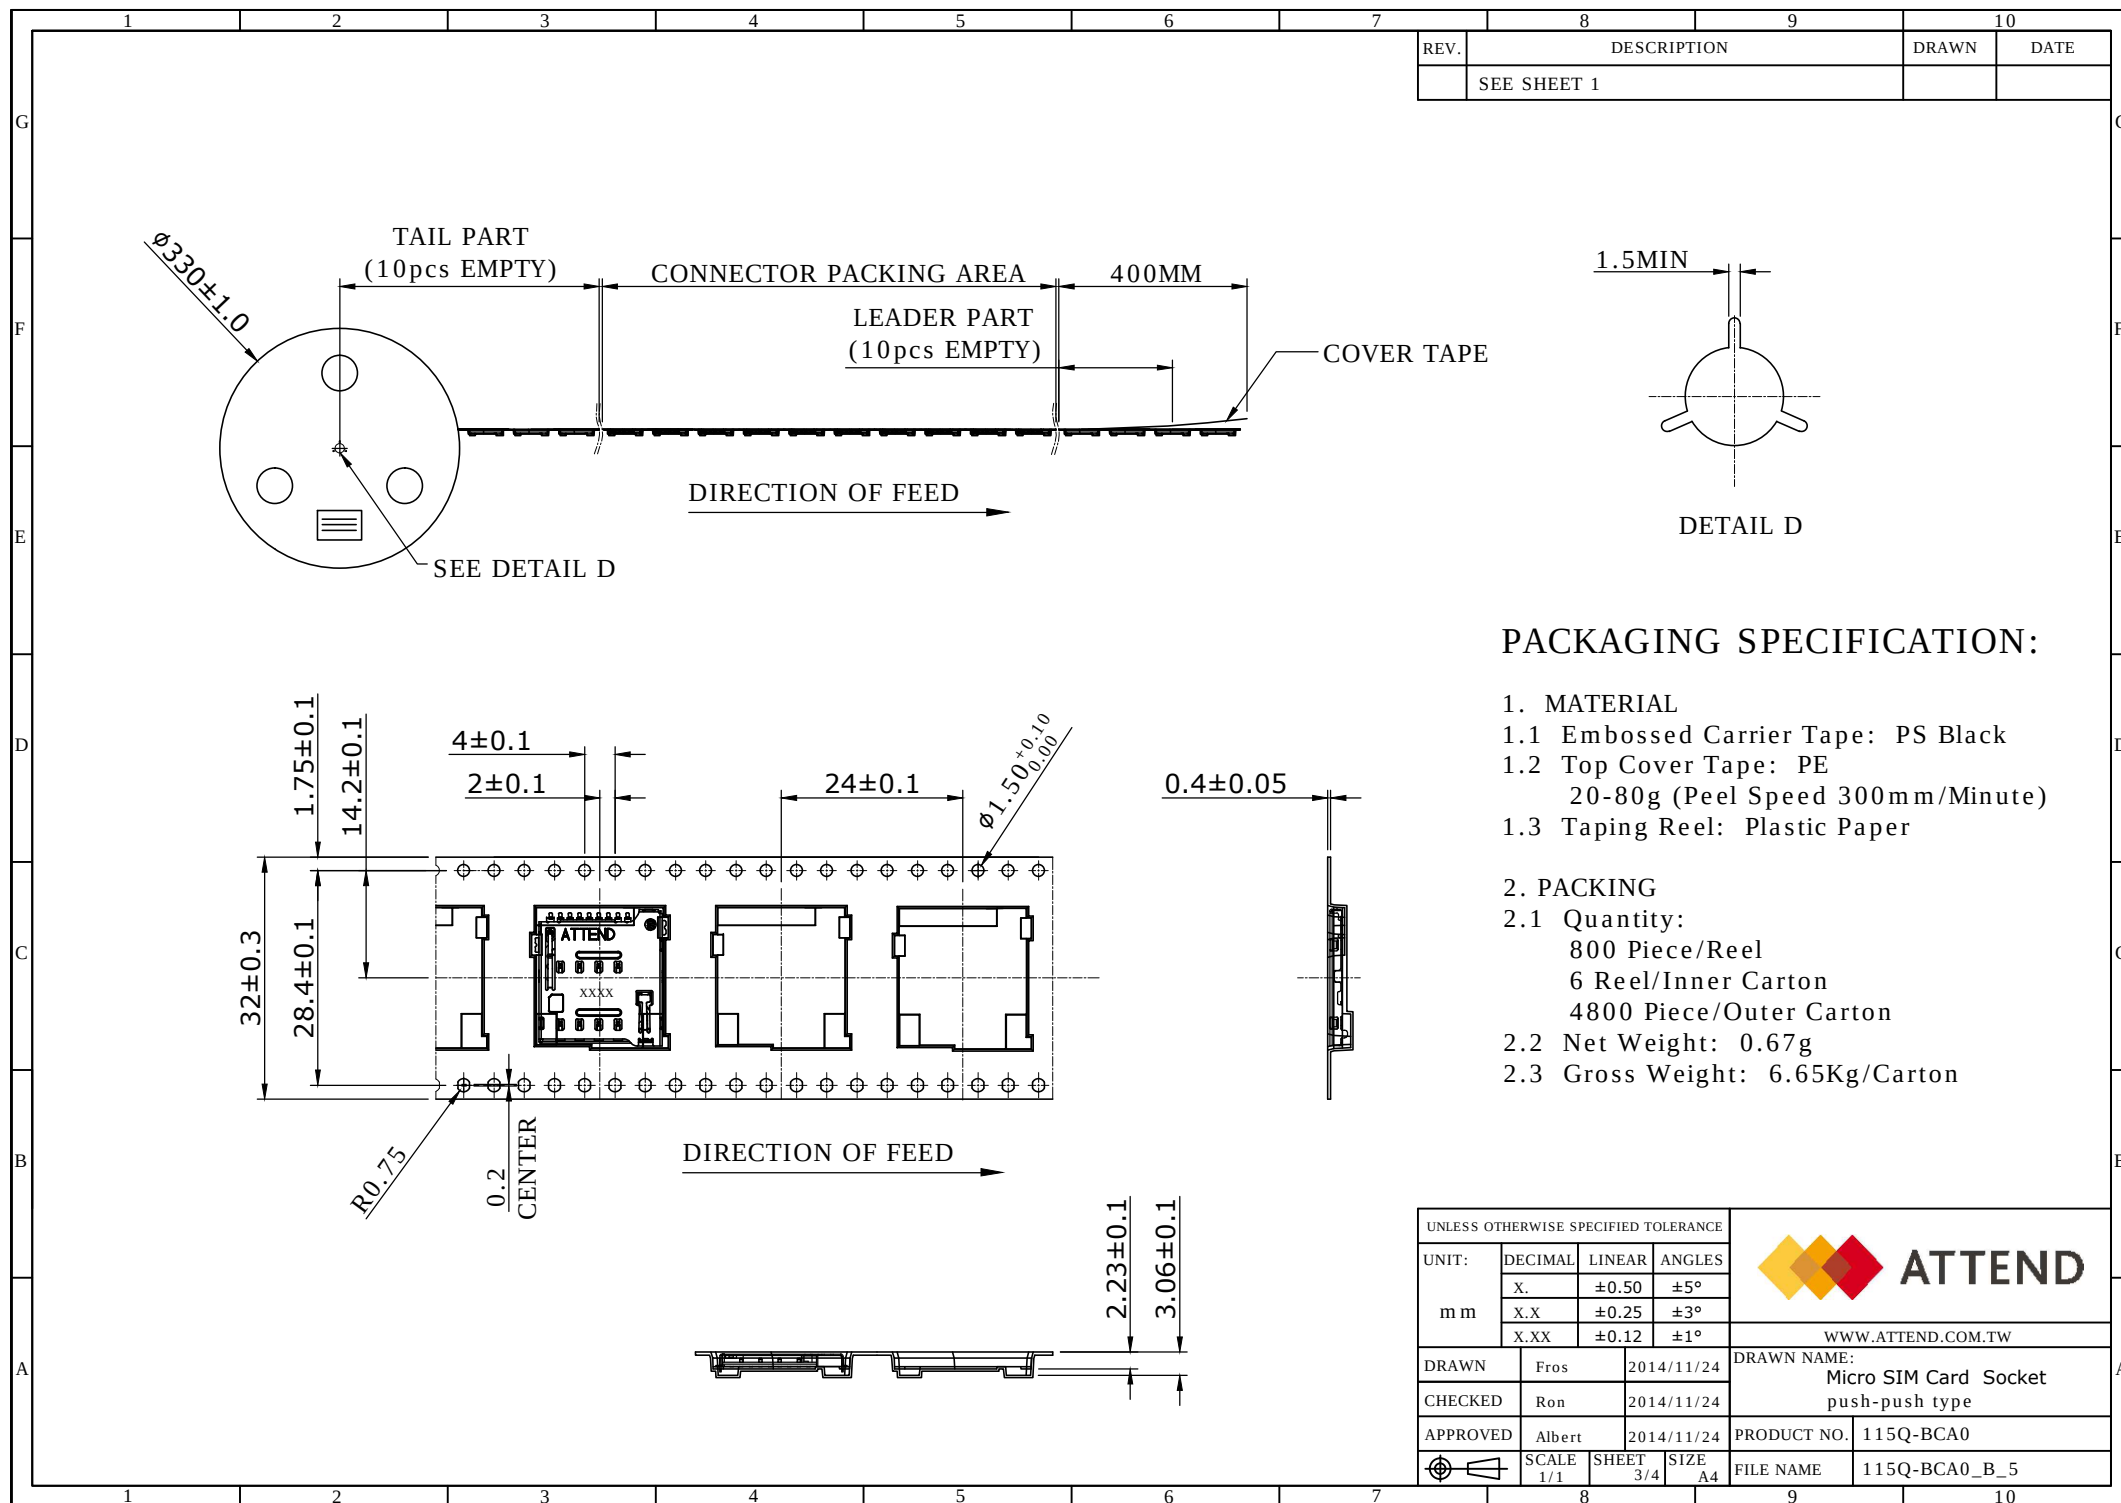

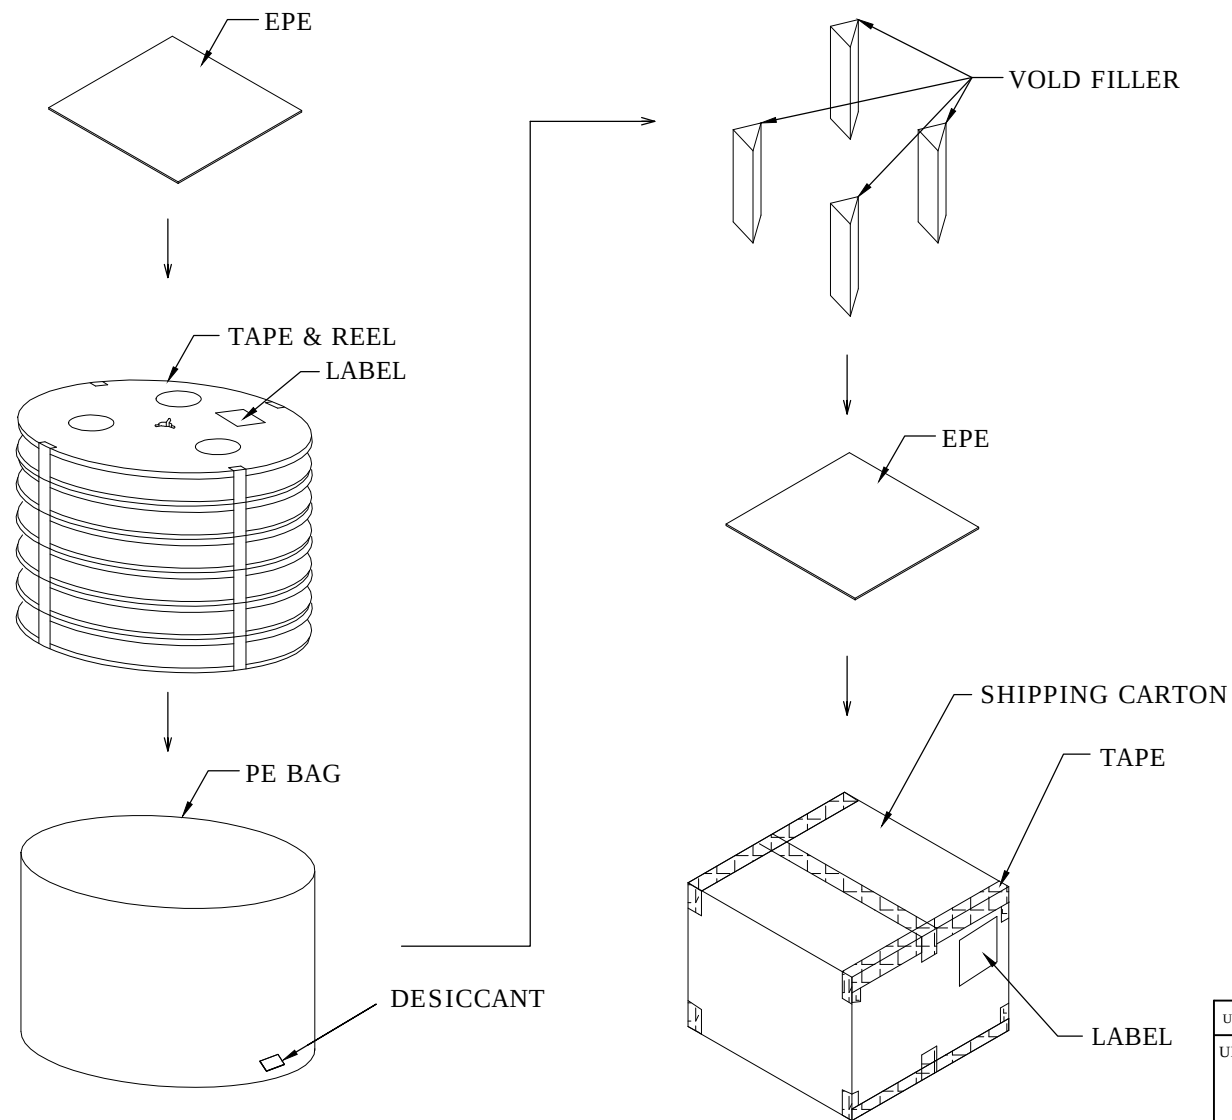

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND		
UNIT:	DECIMAL	LINEAR	ANGLES			
m m	X.	±0.50	±5°	www.ATTEND.COM.TW		
	X.X	±0.25	±3°			
	X.XX	±0.12	±1°			
DRAWN	Fros	2014/11/24	DRAWN NAME: Micro SIM Card Socket push-push type			
CHECKED	Ron	2014/11/24				
APPROVED	Albert	2014/11/24	PRODUCT NO.	115Q-BCA0		
	SCALE N/A	SHEET 4/4	SIZE A4	FILE NAME	115Q-BCA0_B_5	