

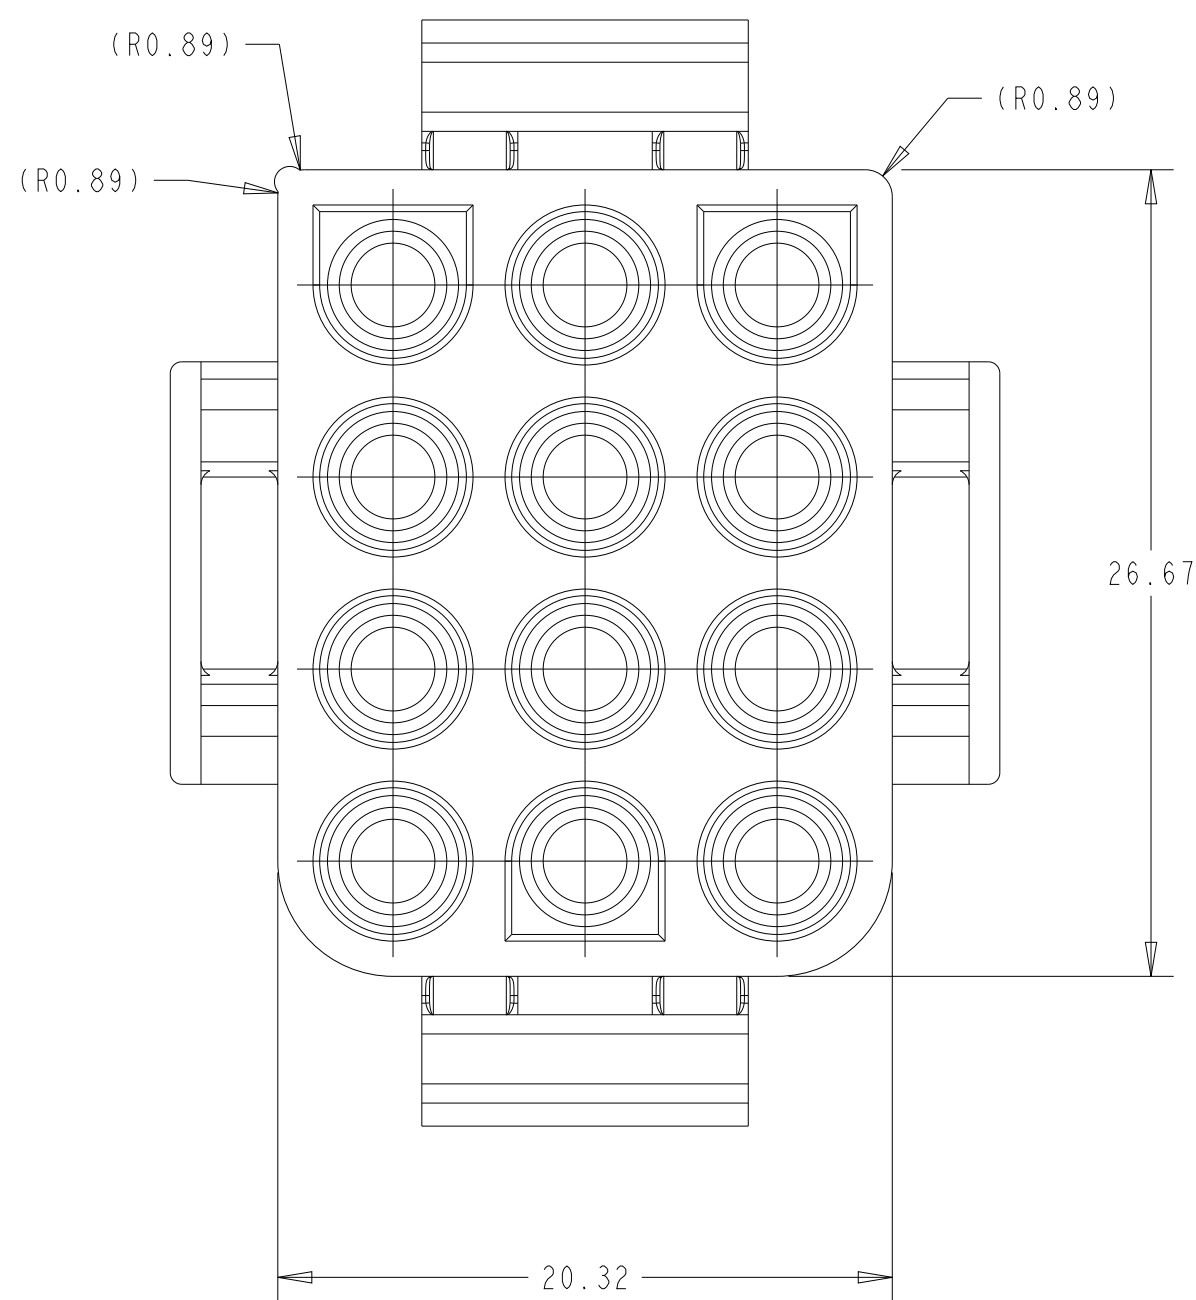




REVISIONS					
P	LYR	DESCRIPTION	DATE	DWN	APVD
	W4	REVISED PER ECR-17-006277	24MAY2017	BW	KR
	Y	REVISED PER ECR-21-101881	20SEP2024	AK	BR
	Z	REVISED PER ECR-24-222968	09OCT2024	AK	BR

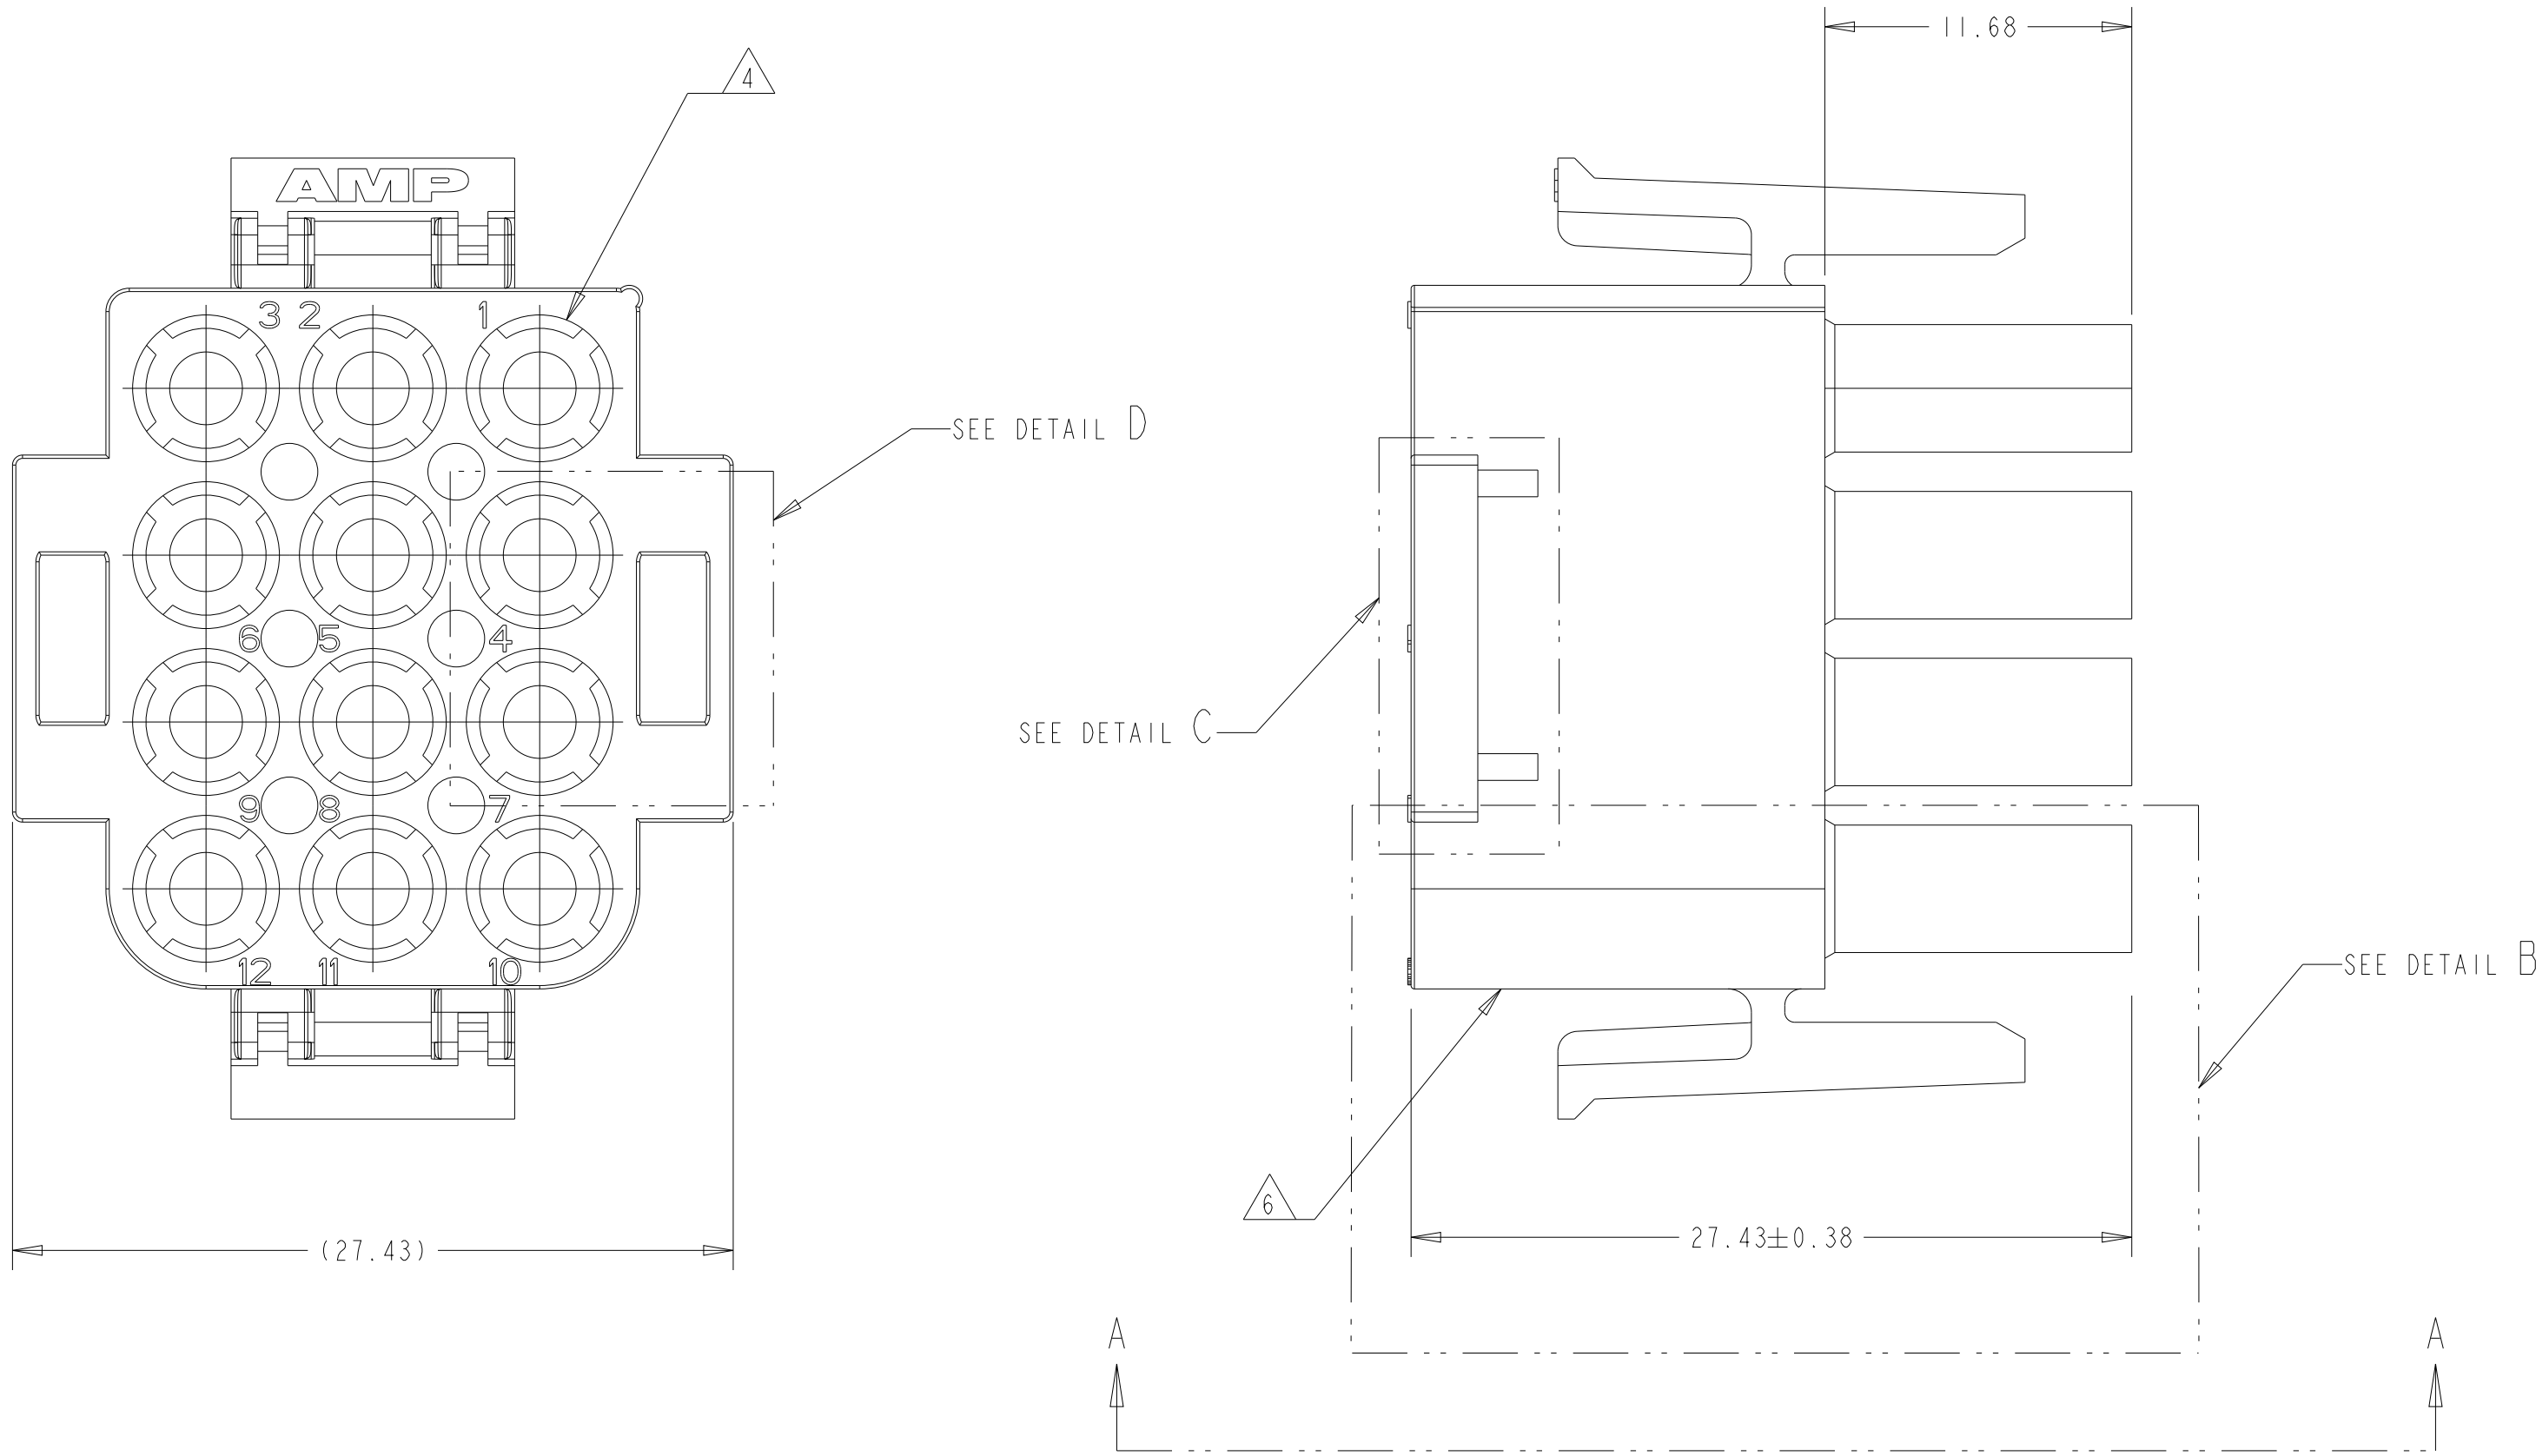


- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
 - SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS (1.0 LBS). NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS (0.5 LBS).
 - DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
- 4 FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- 5 NOT MANUFACTURED IN U.S.
- 6 UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE ON EACH SIDE OF HOUSING..

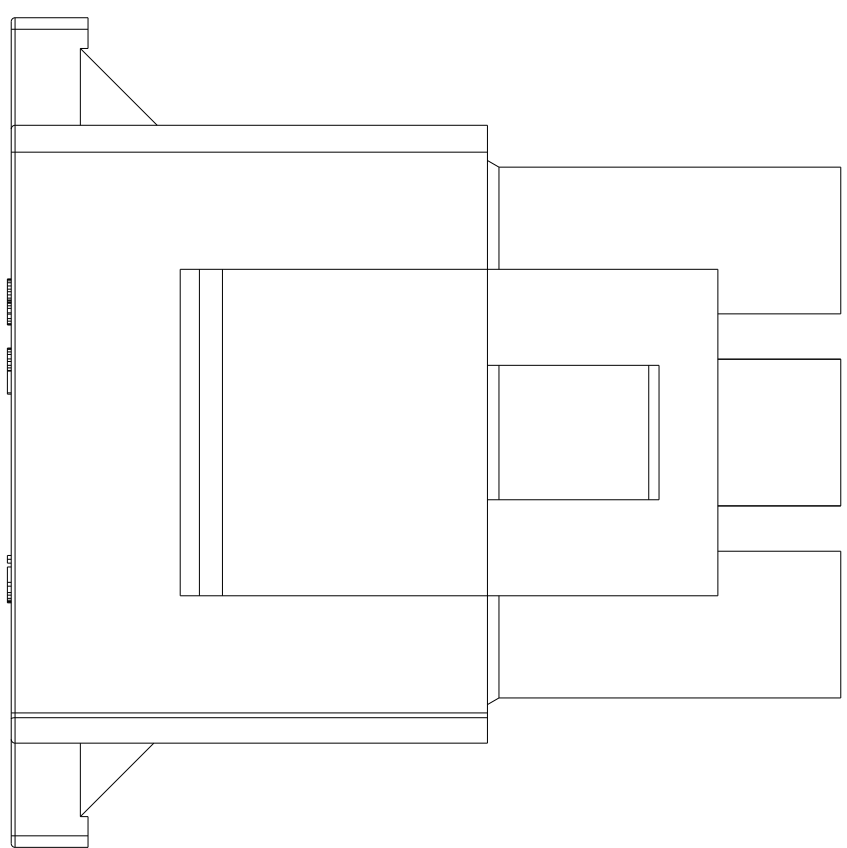


VIEW A-A
350735-4 ONLY

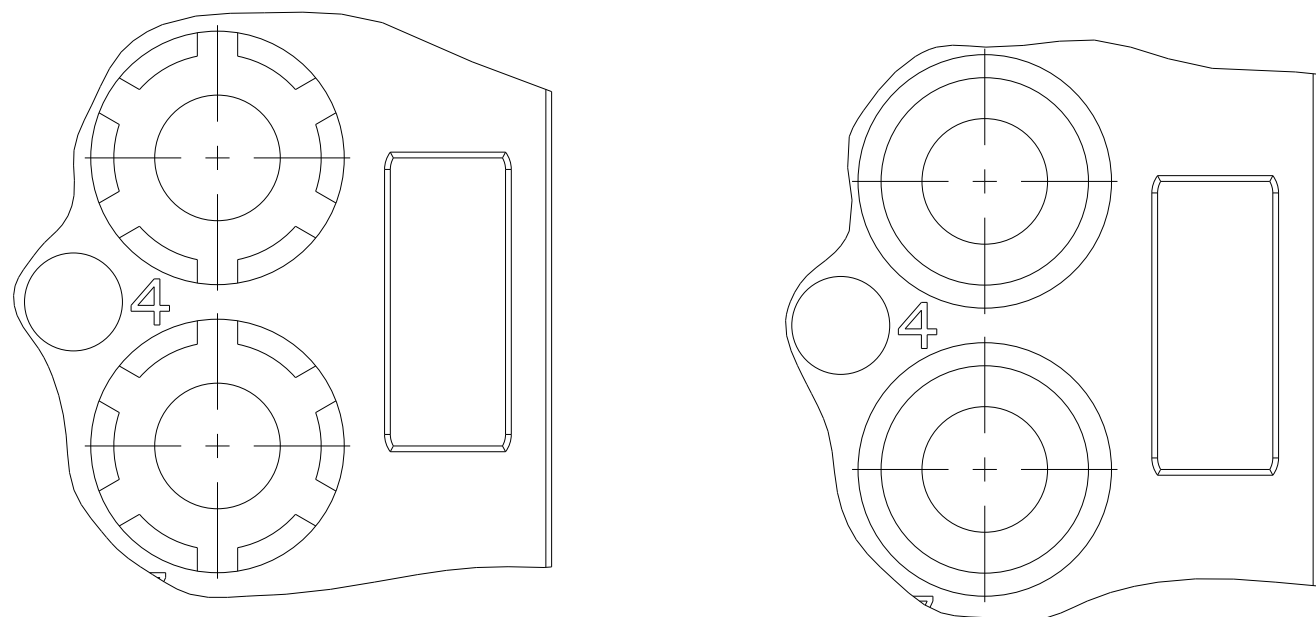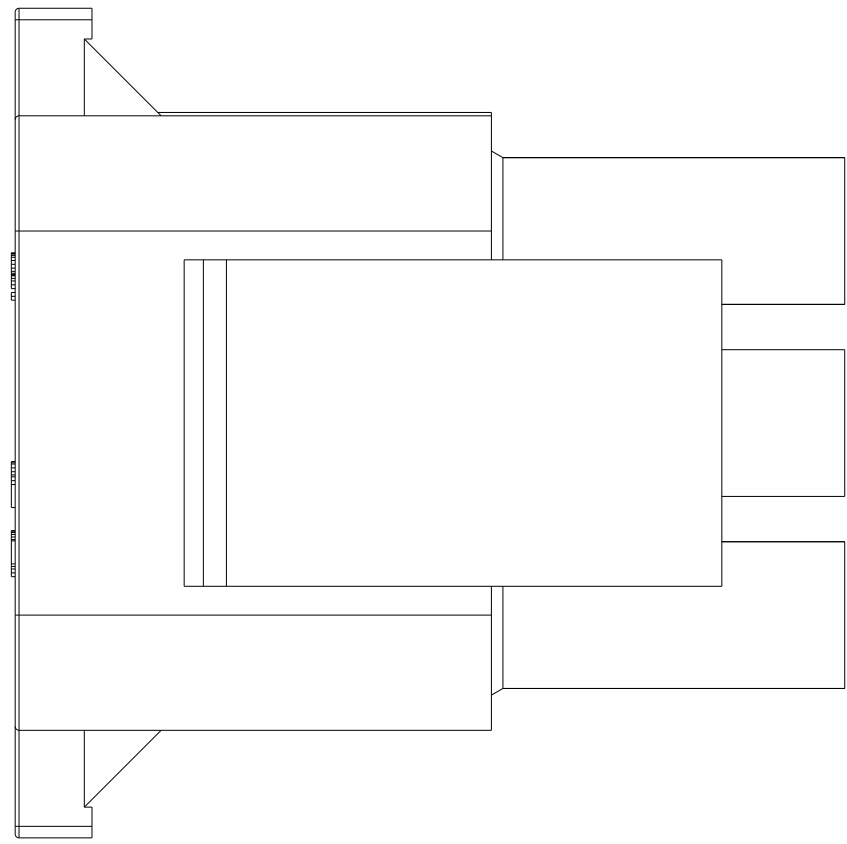



DETAIL D
OPTIONAL CONSTRUCTIONS

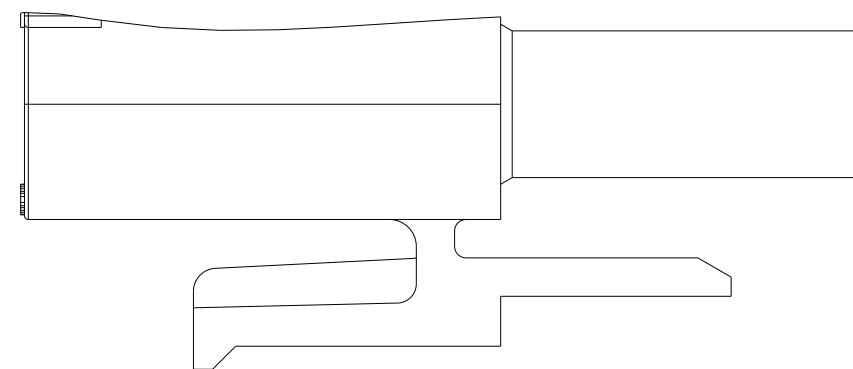

DETAIL B
350735-4 ONLY

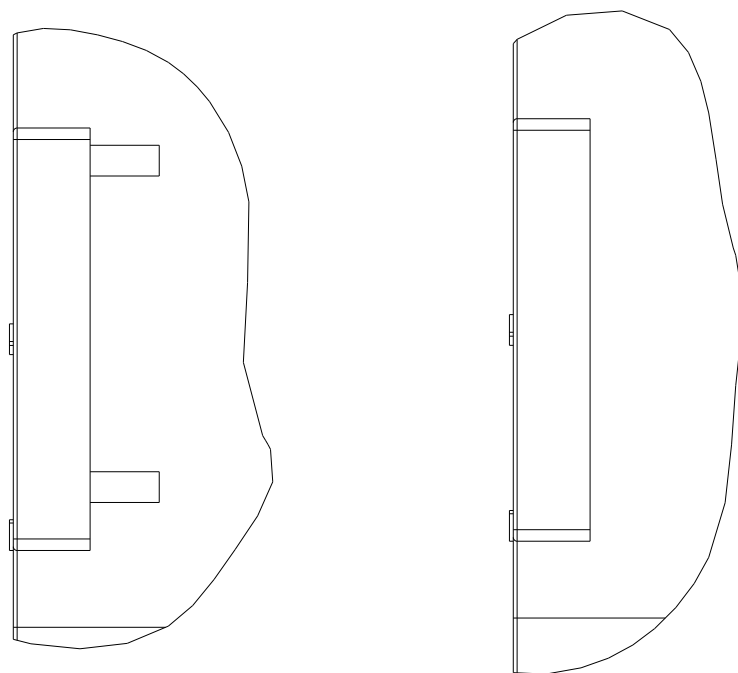

DETAIL C
OPTIONAL CONSTRUCTION

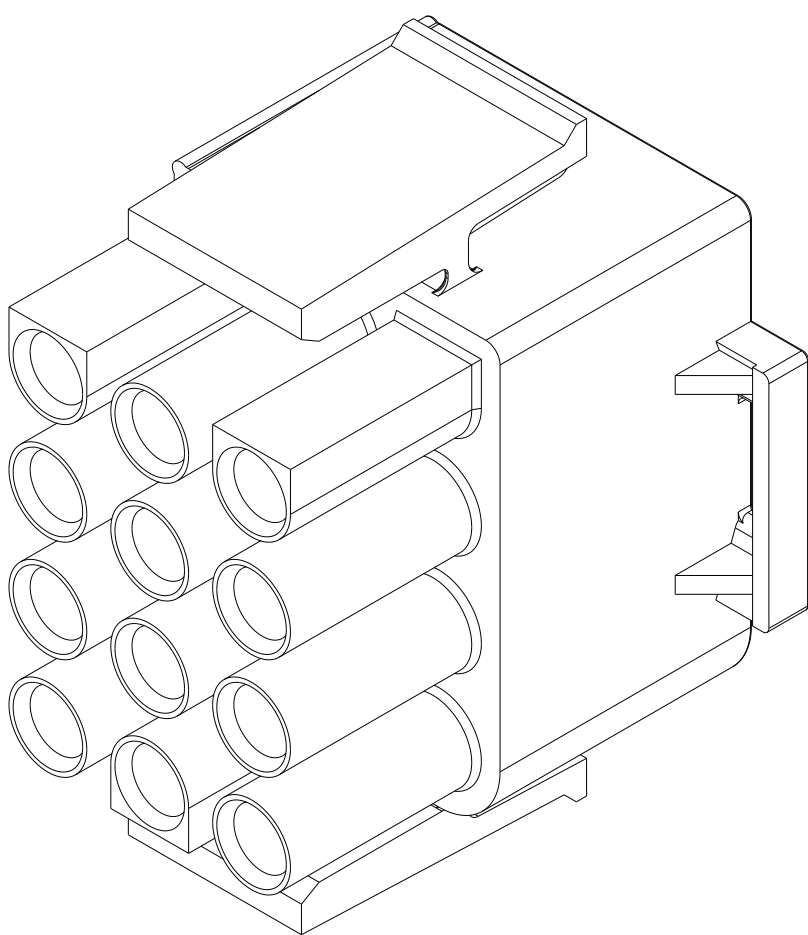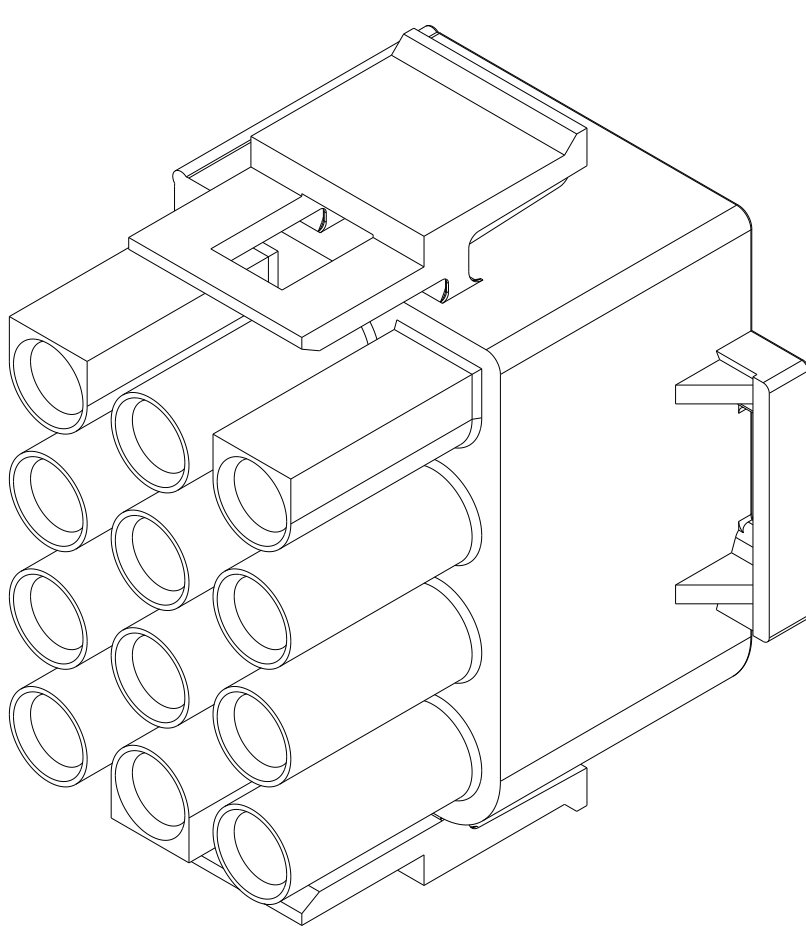

350735-4 ONLY

27.43	1.080
26.67	1.050
20.32	.800
11.68	.460
0.38	.015
0.13	.005
MM	IN
CONVERSION TABLE	

BLACK	1-350735-9
GRAY	1-350735-8
BLUE	1-350735-6
GREEN	1-350735-5
YELLOW	1-350735-4
ORANGE	1-350735-3
RED	1-350735-2
BROWN	1-350735-1
SUPERCEDED BY 1-350735-2	
NATURAL	350735-4
NATURAL	350735-1
COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER CHK S. RIDGILL APVD S. RIDGILL	23FEB2006 23FEB2006 23FEB2006	TE Connectivity	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
mm		0 PLC ± 1 PLC ± 2 PLC ±0.13 3 PLC ± 4 PLC ±		PLUG, 12 CIRCUIT, UNIVERSAL MATE-N-LOK	
FINISH		108-1031 APPLICATION SPEC 114-1010		SIZE	
MATERIAL NYLON, UL 94V-0		WEIGHT -		CAGE CODE DRAWING NO	
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 1	
				REV Z	