

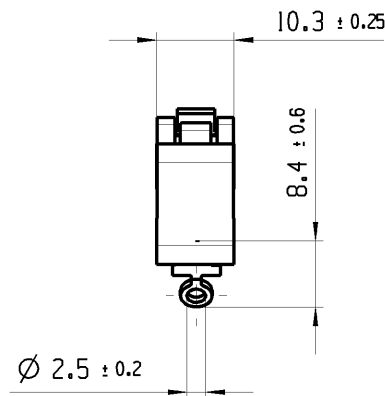


Ruhestellung
free position
Schaltpunkt
operating position
zul. Endstellung
total travel position allowed

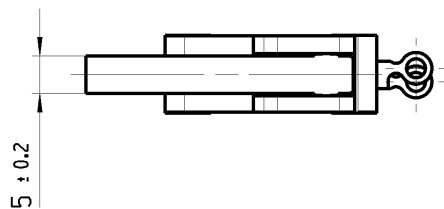

Aufschrift
marking

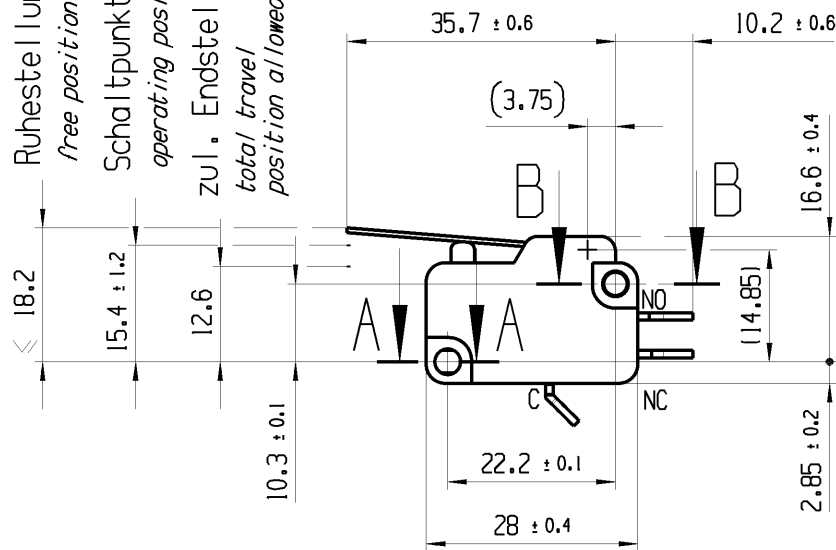


1006 μ T100
10141 /400 ~10E3
612.51/400 ~50E3 05

10A 125V AC 1/4HP
10A 250V AC 1/4HP


R44

Herstellort / -jahr / -woche
date code of manufacture:
place / year / week


3.35 ± 0.05 x 3.08 ± 0.06



Ø 3.08 ± 0.06



NC NO



Wechsler 1-polig
single pole changeover

Schalt-Betaetigungskraft 0.8 bis 1.4 N
actuating force 0.8 up to 1.4 N

Differenzweg ≤ 0.7 mm
movement differential

fuer Form und Lage FOR SHAPE AND LOC.			Allgemeintoleranzen UNTOLERANCED DIMENSIONS										Pause COPY	Blatt SHEET 01	TYP K	Zeichn./DRAWING NO. 10060901	Index e
			PROJEKTION	Abmasse und Nennmassbereiche Angaben in mm													
fuer Winkel FOR ANGLE. ± 2				ALL DIMENSIONS ARE IN MILLIMETRES	Laenge LENGTH		Radien RADII						Original Din A4	Massstab SCALE 1 : 1 30mm	Schnappschalter		
					0-6 ± 0.1		± 0.2										
					± 0.15		± 0.3								Snap action switch		
					± 0.2		± 0.5										
					± 0.3												
					± 0.4		± 10%										
					± 0.8												
d	26264	02.09.99	PFU										CAD: NX V6.0		 MARQUARDT		
c	22549	24.11.93	GD									gez./DRAWN BY 22.03.13 BCY gepr./CHECKED BY					
b	22163	06.05.93	BLE														
	13026	14.01.80	KR	e	85449	15.10.13	BRC										
Ausg. ISSUE	Aenderung REVISION	gez. DRAWN BY		Ausg. ISSUE	Aenderung REVISION	gez. DRAWN BY						Ersatz fuer/REPLACEMENT OF Zg.gl.Nr.v.02.09.1999					