


R13-508

Screw Type

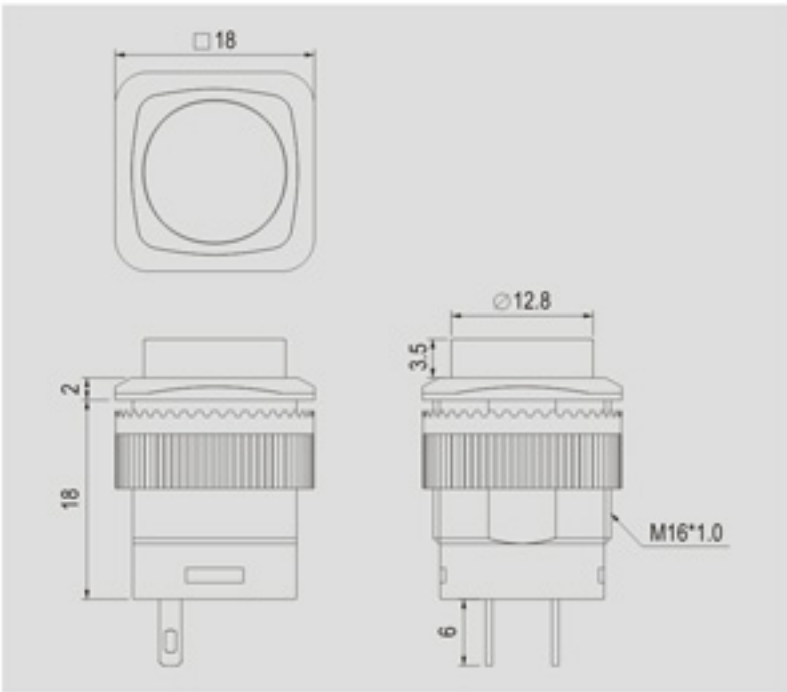

Rating
3A 125V AC 1.5A 250V AC
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1500V 1 minute
Cut-out
 7 mm max

FEATURES

- * MATERIAL: Frames are nylon with glass fiber (UL flame: 94V-2). Terminals are silver plated brass.
- * Illuminated actuator are molded in PC, available with red, amber and green colors.
- * Mounted by nut.

R13-508

FUNCTION	BUTTON	TERMINAL
A 2P SPST	W/O LED With LED (3VDC)	SO
B 2P SPST		

* () =momentary