


REV.	DATE	DESCRIPTION
NC	04/01/08	INITIAL RELEASE

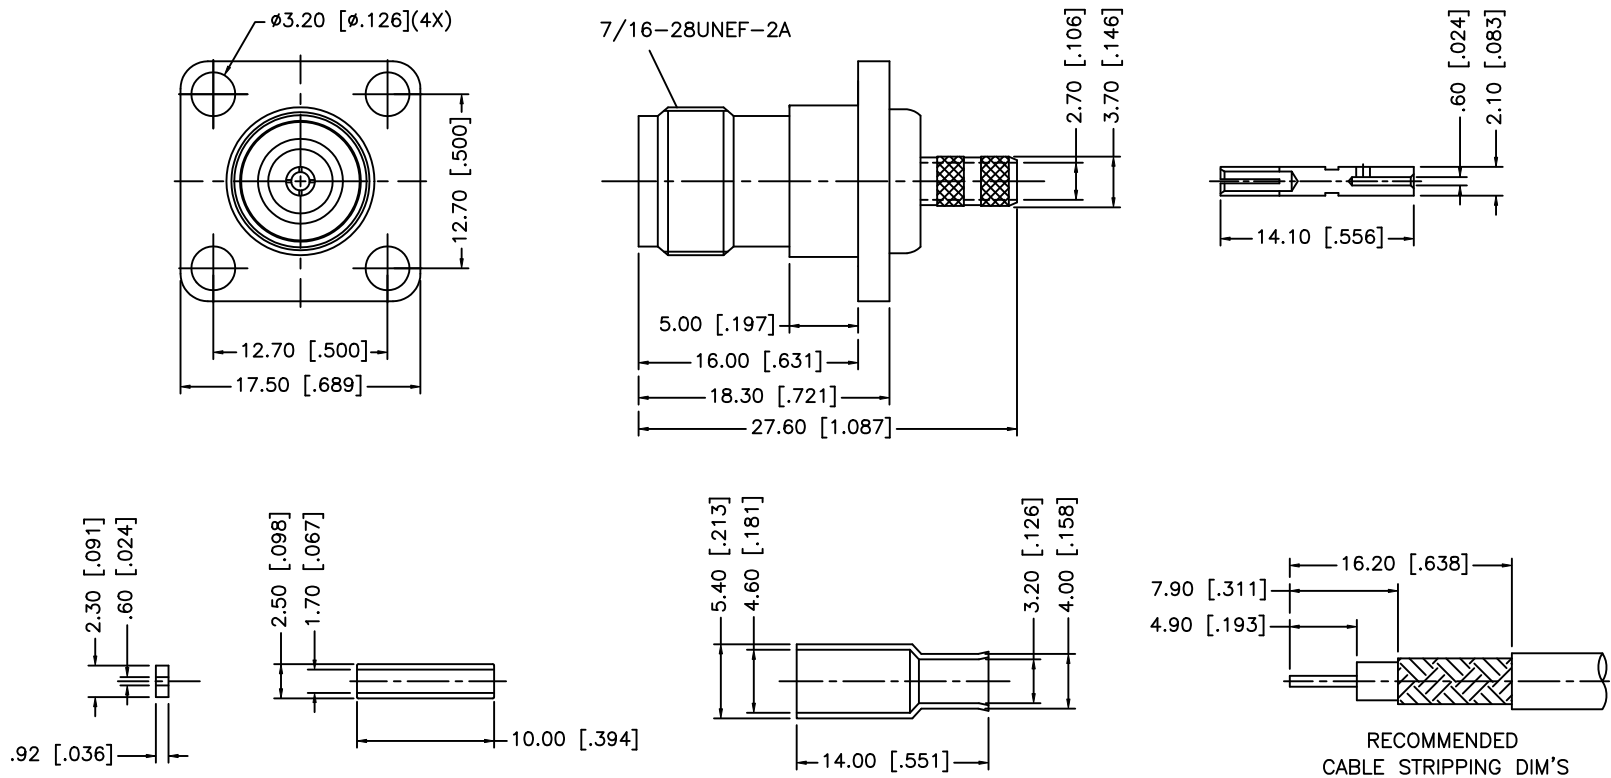

NOTE:
 1. CRIMPED FERRULE HEX CRIMP SIZE .178"
 2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS	DATE	Amphenol Connex					
8						DRAWN	G.R.S.						04/01/08
7	FERRULE	BRASS	NICKEL	1		CHECKED			PART DESCRIPTION TNC PANEL CRIMP JACK FOR RG-316 DOUBLE BRAID				
6	SLEEVE	TEFLON	NATURAL	1		ISSUED							
5	SPACER	BRASS	NICKEL	1		SHEET	1 OF 1		PART NO. 122379				
4	CONTACT PIN	PHOS. BRONZE	GOLD	1									
3	BODY	BRASS	NICKEL	1					DWG. NO. 122379.DWG				
2	INSULATOR	DELRIN	NATURAL	1									
1	HOUSING	BRASS	NICKEL	1				REV.	NC	SIZE	A	SCALE	NA
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING		CAD FILE C:/122/122379.DWG						