
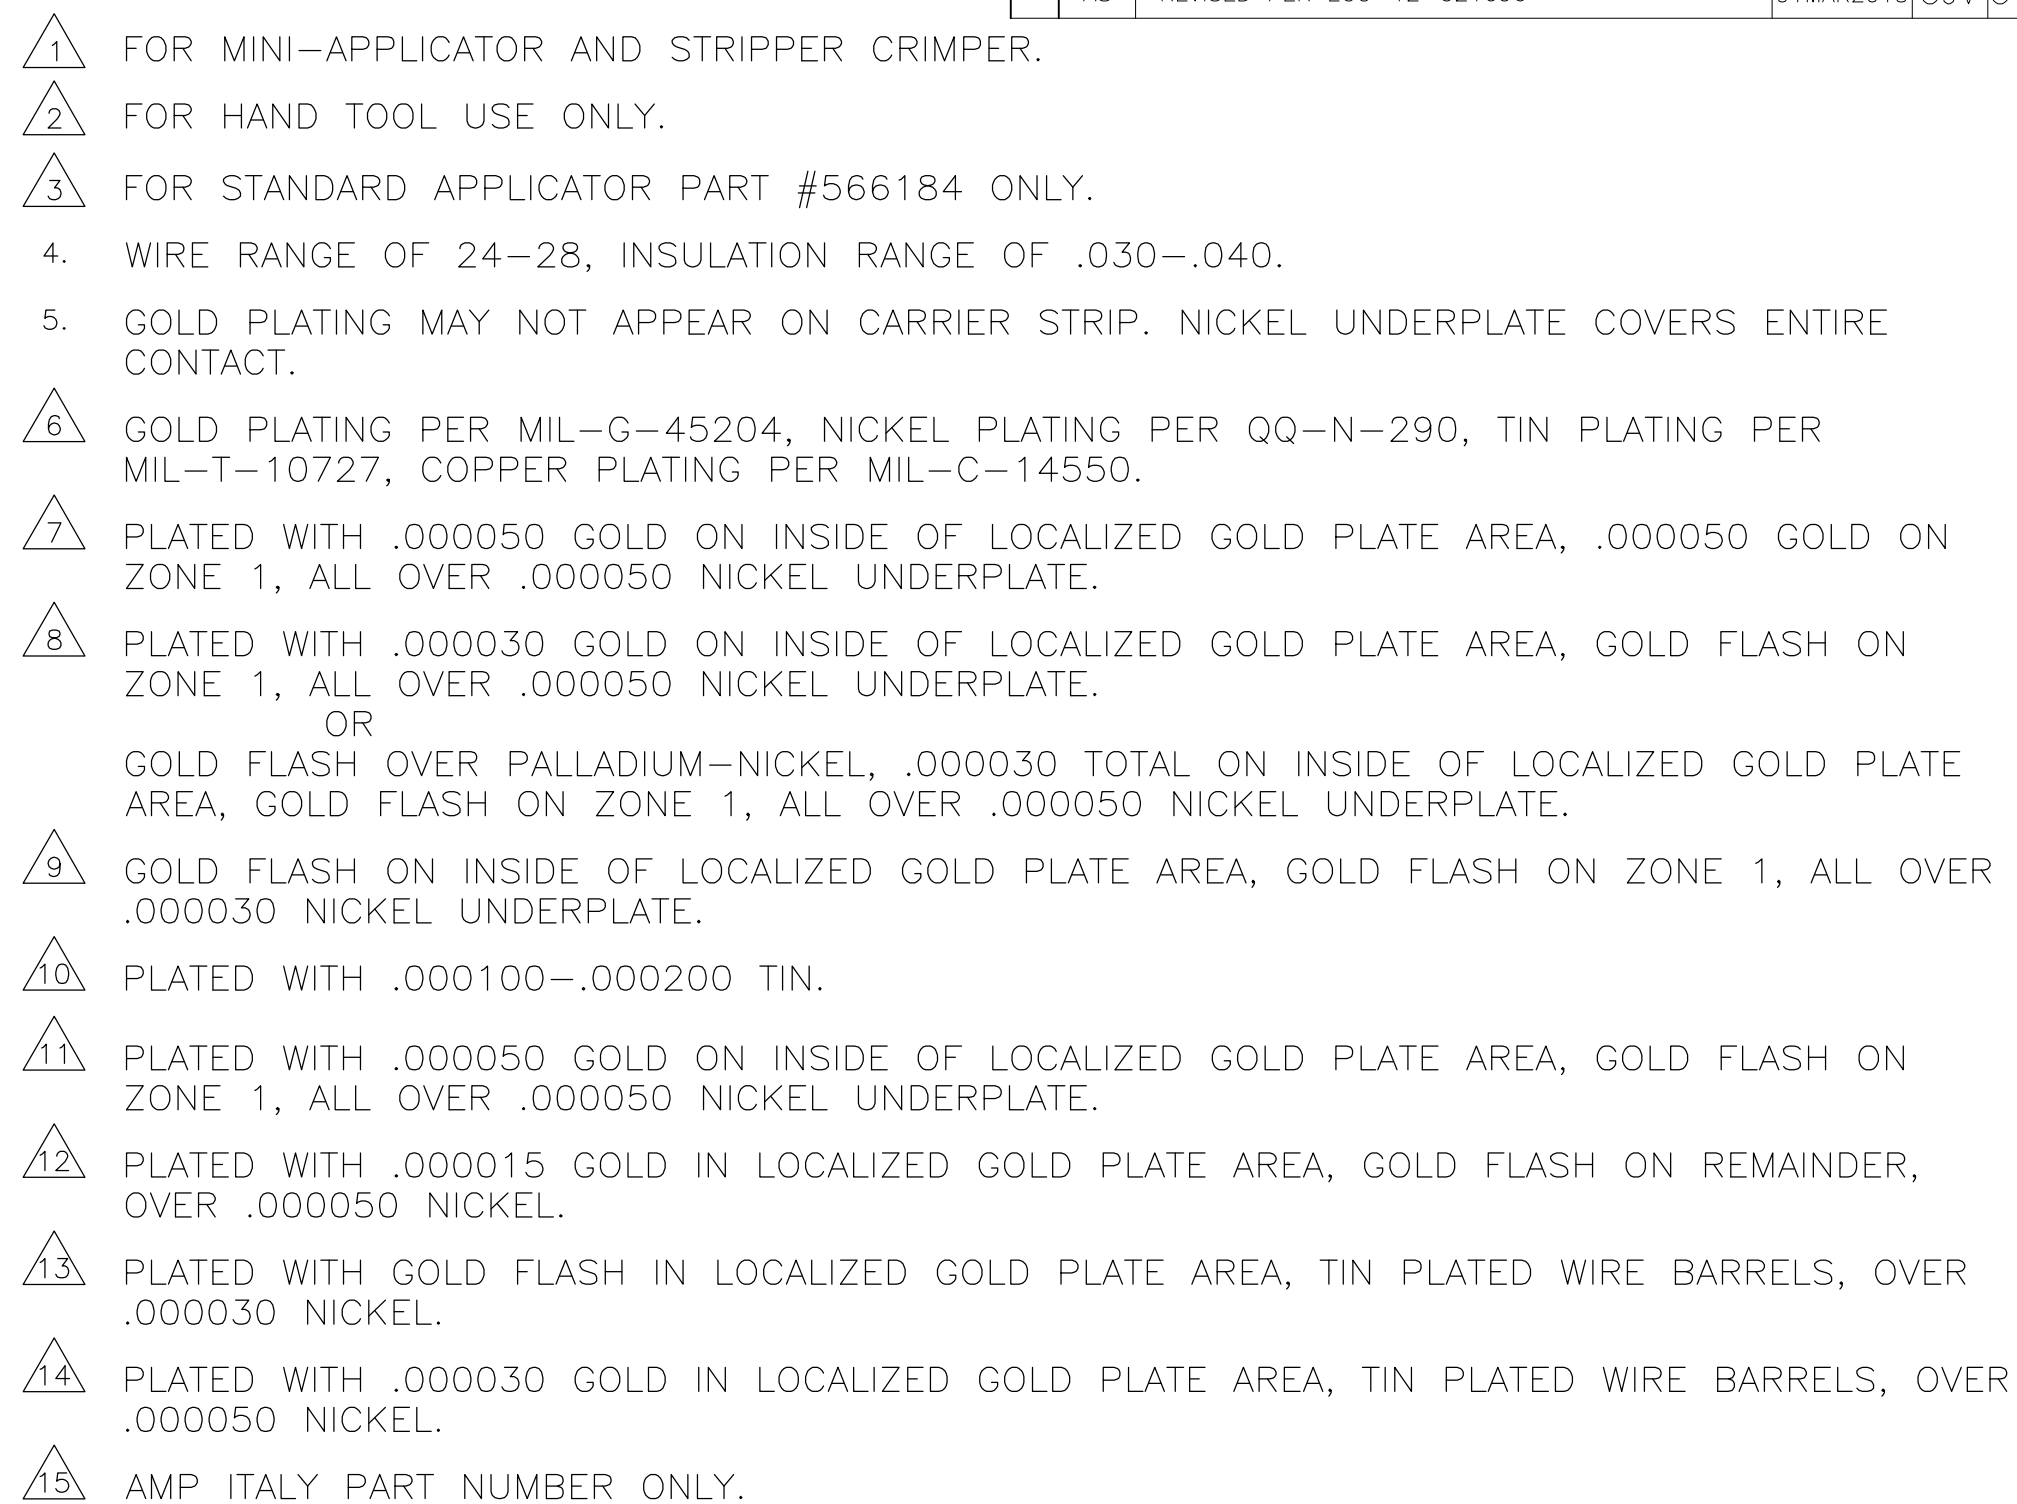




LOCALIZED AREA	OBSOLETE	STANDARD			STRIP	7-66505-0
		SMALL PACK			LOOSE PIECE	6-66505-9
SUPERSEDED BY 66505-9		STANDARD			LOOSE PIECE	6-66505-2
	OBSOLETE	STANDARD			STRIP	6-66505-0
	OBSOLETE	STANDARD			LOOSE PIECE	5-66505-9
	OBSOLETE	STANDARD			STRIP	5-66505-7
	 OBSOLETE	STANDARD			STRIP	5-66505-5
		STANDARD			STRIP	2-66505-7
SUPERSEDED BY 5-66505-7		STANDARD			STRIP	1-66505-4
		STANDARD			STRIP	1-66505-3
	OBSOLETE	STANDARD			STRIP	1-66505-2
		STANDARD			LOOSE PIECE	1-66505-0
		STANDARD			LOOSE PIECE	66505-9
		STANDARD			LOOSE PIECE	66505-8
		STANDARD			STRIP	66505-4
		STANDARD			STRIP	66505-3
		STANDARD			STRIP	66505-2
		PACKAGING TYPE	FINISH	USE	TYPE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009		DWN C. RICHARD 1-6-87 CHK S. WELDON 1-7-87 APVD -		 TE Connectivity	
DIMENSIONS: INCHES 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± -		NAME SOCKET CONTACT, SIZE 20 DF, 24-28 AWG, W/ .030-.040 DIA INSULATION SUPPORT,	
MATERIAL PHOSPHOR BRONZE		FINISH  SEE TABLE		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
		PRODUCT SPEC - APPLICATION SPEC 114-10000 WEIGHT -		A2 00779 C-66505 -	
CUSTOMER DRAWING				SCALE 10:1 SHEET 1 of 1 REV AS	