


	1	2	3	4	5	6	7	8	
A									A
B									B
C									C
D									D
E	OPTION: W/ LOCATING PEG OR W/O LOCATING PEG								E
F	SPECIFICATIONS								F
G	Material Insulator : LCP, glass reinforced, rated UL 94V-0 Contact : Phosphor Bronze								G
H	Electrical Current Rating : 1 Amp Contact Resistance : 30 mΩ max. Insulation Resistance : 3000 MΩ min. Dielectric Withstanding Voltage : 500V AC for 1minute Operating Temperature : -40℃ to +105℃								H
	1	2	3	4	5	6	7	8	

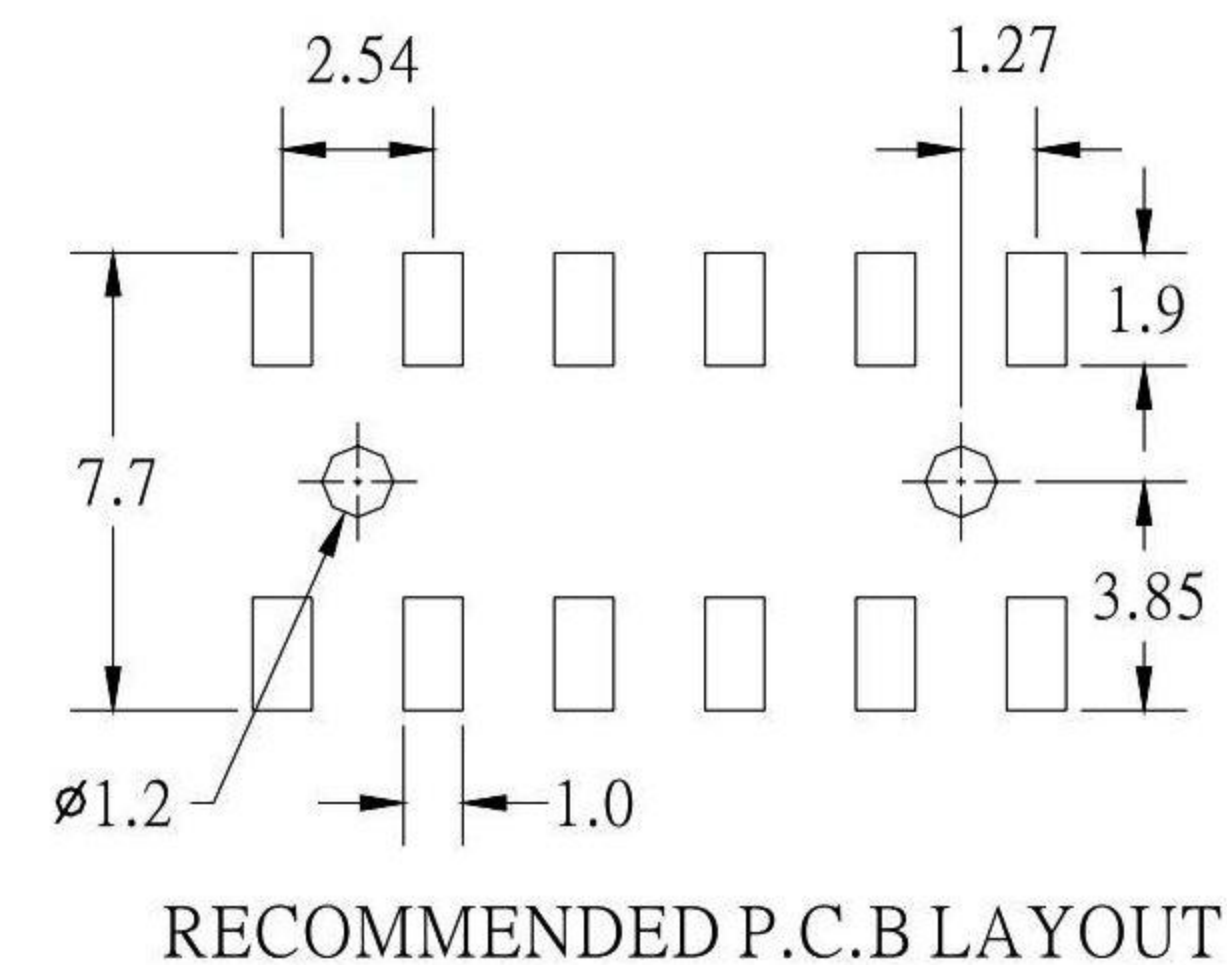

RoHS Compliant			
APPD. 核准		TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖 HELEN		.0 ± 0.25 .00 ± ANG. ±	
DATE 制表日 2010/11/9	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號
	PAGE 張數 1 OF 1	REV. 版次 A	

2.54mm FEMALE HEADER DUAL ROW H:6.4mm
2X??P SMT TYPE TOTAL HEIGHT=7.1mm ROHS