© THIS DRAWING IS THE PROPERTY OF SAIA–BURGESS ELECTRONICS AND MUST NOT BE USED OR COPIED, ENTIRELY OR IN PART, WITHOUT THE PERMISSION OF SAIA–BURGESS ELECTRONICS. ©

Drg No :- C 44057

INSTALLATION DRAWING

SPECIFICATION

ACTUATING FORCE = 0.7N [2.5ozf] MAX

RELEASE FORCE= 0.09N [0.32ozf] MIN

FREE POSITION = 12.5 [0.49] MAX

OPERATING POSITION = $10.3^{+0.8}_{-0.55}$ [0.4]

MOVEMENT DIFFERENTIAL = 0.45 [0.018] MAX

OVER TRAVEL = DEPRESS TO CASE (AVAILABLE)

TESTED AND STAMPED TO UL & CSA REQUIREMENTS

APPROVAL RATING :-
5AMP – 250 V.A.C.

DIAGRAM OF CONNECTIONS

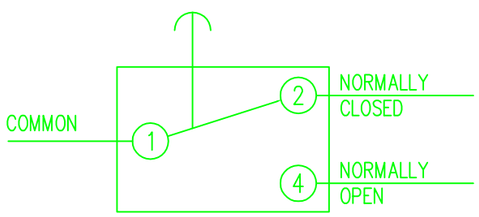

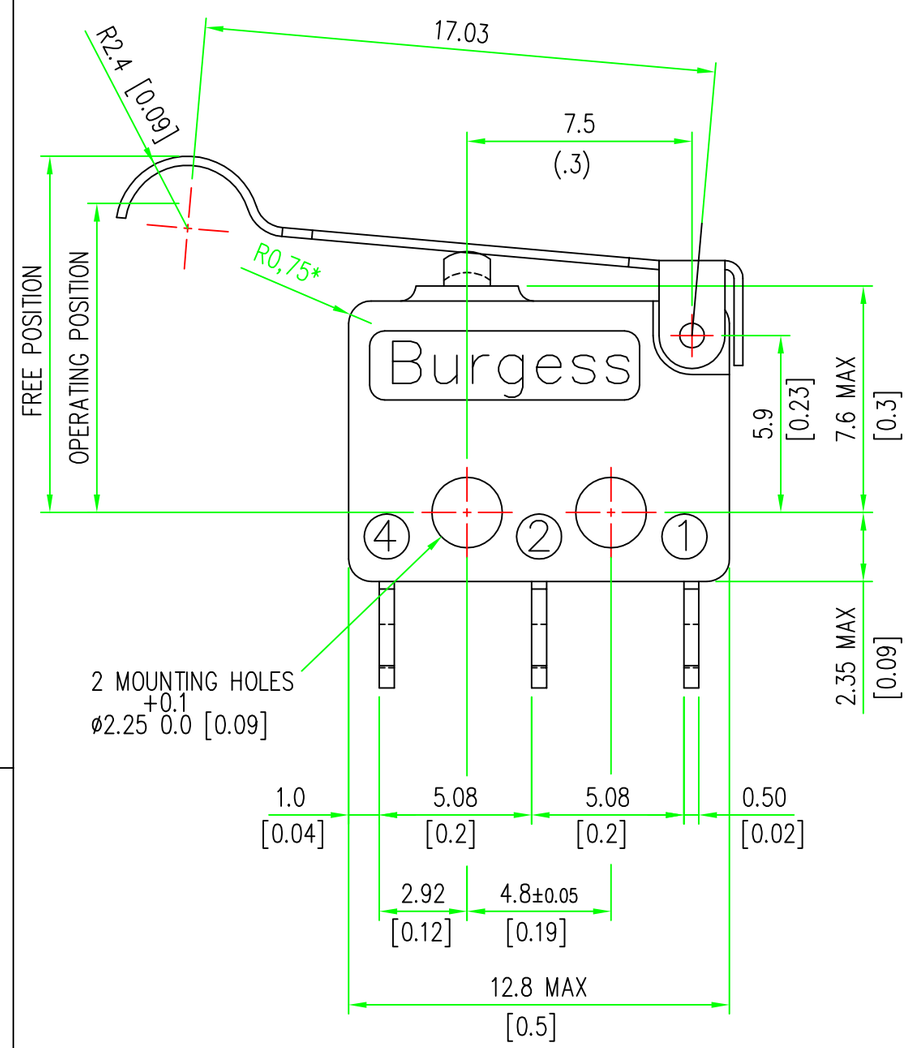

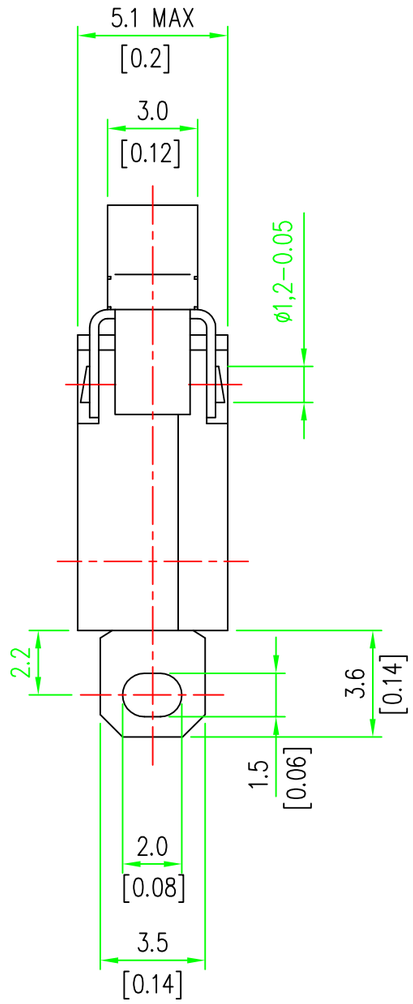

DEGREE OF PROTECTION:– ENCLOSURE IEC IP40

*Valid for all case corners.

ISSUE	REVISION	DATE
1	FIRST ISSUE	10/7/00
2	E2394–A1	16/07/08

SAIA-Burgess Electronics
SWITCHES•MOTORS•CONTROLLERS
SAIA–Burgess Electronics Limited
Dukesway, Team Valley Trading Estate
Gateshead, Tyne & Wear NE11 0UB
Tel: (0191)4016100, Fax: (0191)4016322

THIRD ANGLE PROJECTION

DO NOT SCALE !
This drawing must only be amended on CAD system

TOLERANCES UNLESS STATED:-
NO DECIMAL PLACE ±0.50 1 DECIMAL PLACES ± 0.25
2 DECIMAL PLACES ±0.15 ANGULAR ±1°
INCH - OUNCE UNITS (IN BRACKETS)

DRAWN	T.BELL.	Approved	
DATE	10/7/00	DRAWING OFFICE	
SCALE	5:1	ENGINEERING	
DATE ISSUED		QUALITY ASSURANCE	

ALL DIMENSIONS SPECIFIED IN MILLIMETRES

TITLE / DESCRIPTION
F4T7YC UL

Drg No :- C 44057 A3

sales@prom-elec.com / ООО ПРОМЭЛЕКТРОНИКА