

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

LOC

DIST

CM

0

REV

DESCRIPTION

DATE

DWN

APVD

AP2

REVISED PER ECO-11-004587

11MAR11

RK

HMR

5

4

7

3

SEE DETAIL A

7.62±0.25

5

27.43±0.38

11.68

26.67±0.25

14.73
REF

3

2

3

2

DETAIL A
OPTIONAL CONSTRUCTION

3-DIMENSIONAL MODEL
NTS

27.431.080

26.671.050

14.73.580

11.68.460

7.62.300

0.38.015

0.25.010

0.13.005

MMIN

CONVERSION TABLE

NOTES:

1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.

2. SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].

3. DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.

4. FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.

5. UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.

6. TRADEMARK LOCATION (AMP OR TE CONNECTIVITY).

7. MANUFACTURING LOCATION ID (OPTIONAL).

8. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
R. VESTAL
CHK
R. SWING
APVD
D.SELF

08FEB9508FEB9508FEB95

DIMENSIONS:

mm

0. PLC ± -

1. PLC ± -

2. PLC ± 0.13

3. PLC ± -

4. PLC ± -

ANGLES ± 0°30'

TOLERANCES UNLESS OTHERWISE SPECIFIED:

MATERIAL NYLON, UL 94V-2

FINISH -

PLUG, 4 CIRCUIT, UNIVERSAL MATE-N-LOK(TM)

SIZE A1CAGE CODE 00779DRAWING NO 480702

WEIGHT -

RESTRICTED TO -

SCALE 4:1SHEET 1 OF 2REV AP2

CUSTOMER DRAWING






METRIC

4805 (3/11)

sales@prom-elec.com / ООО ПРОМЭЛЕКТРОНИКА

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
CM	0	-	-	SEE SHEET 1	-	-

- NOTES:
1. STAMP NUMBERS 3.18 HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE).
 2. CHARACTERS TO BE POSITIONED ON HOUSING TO BE READ FROM WIRE END ONLY.
 3. VIOLET, BLACK, BROWN AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS. ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

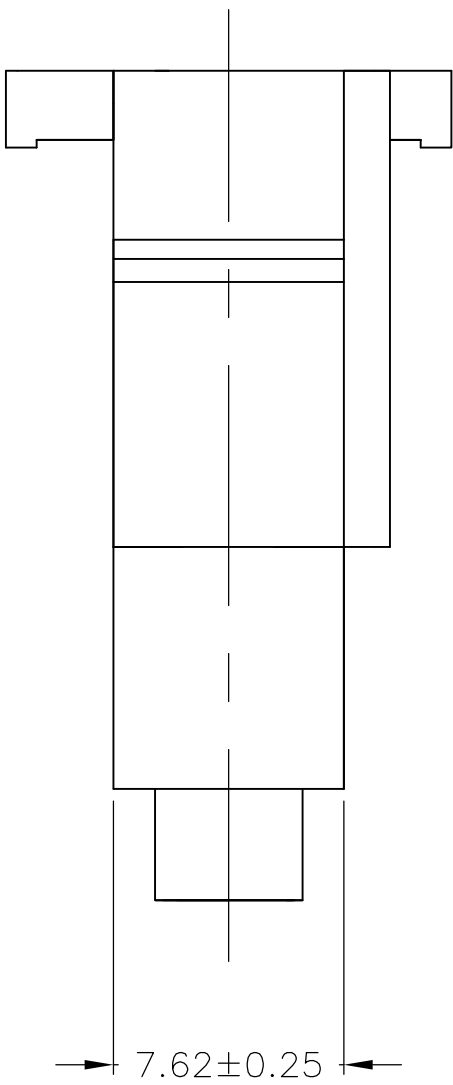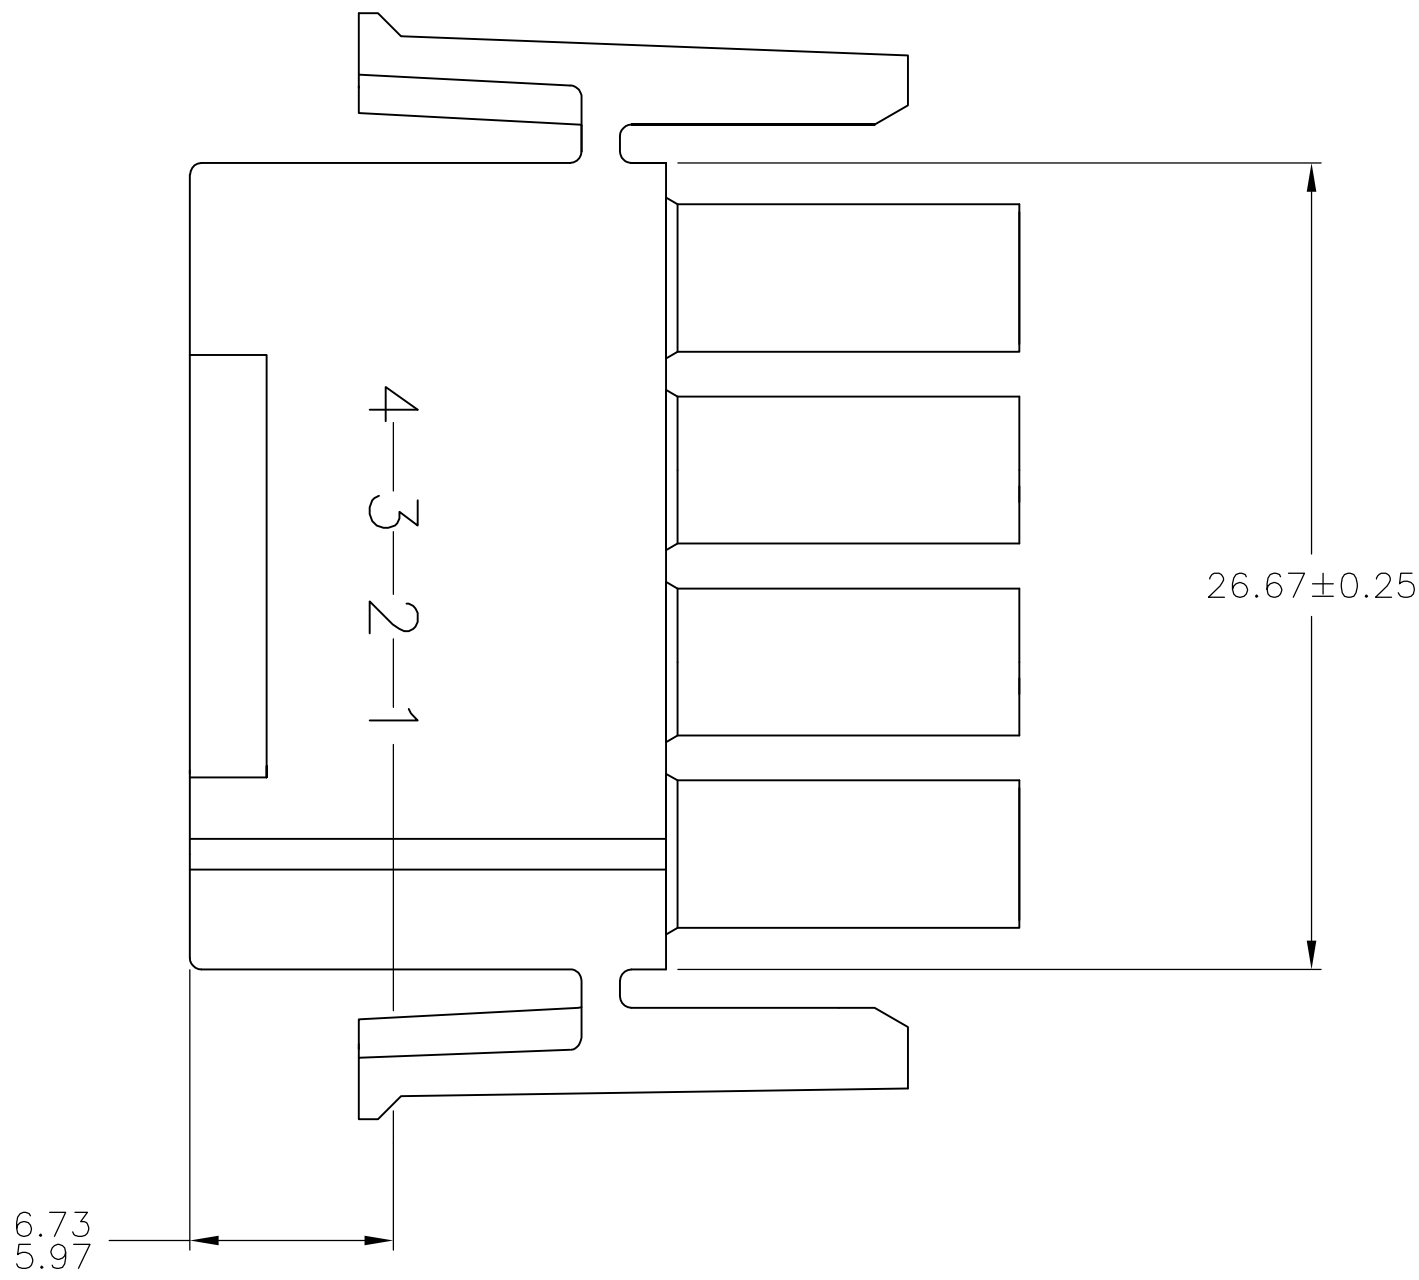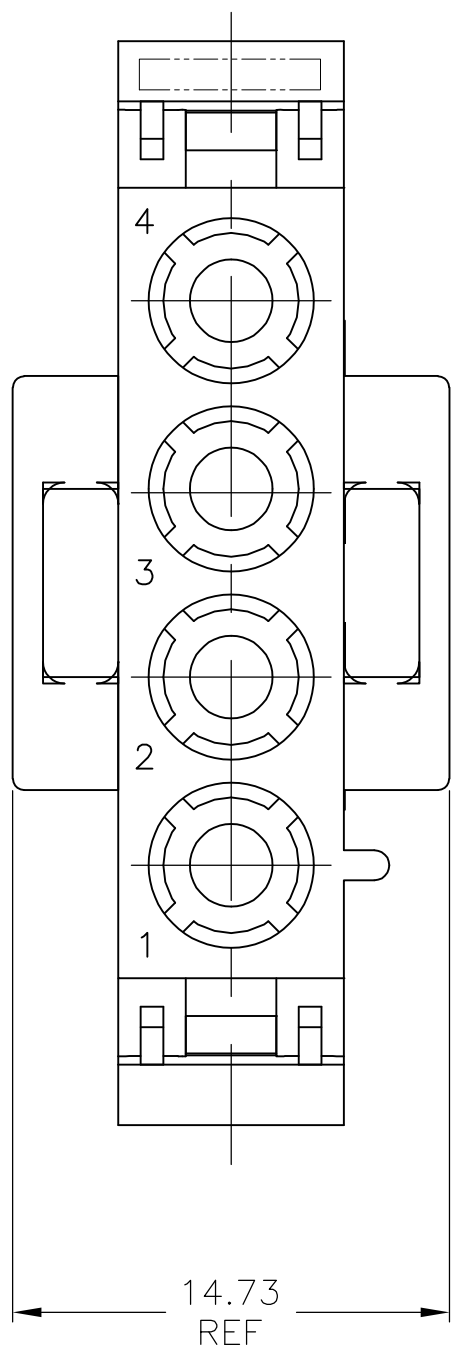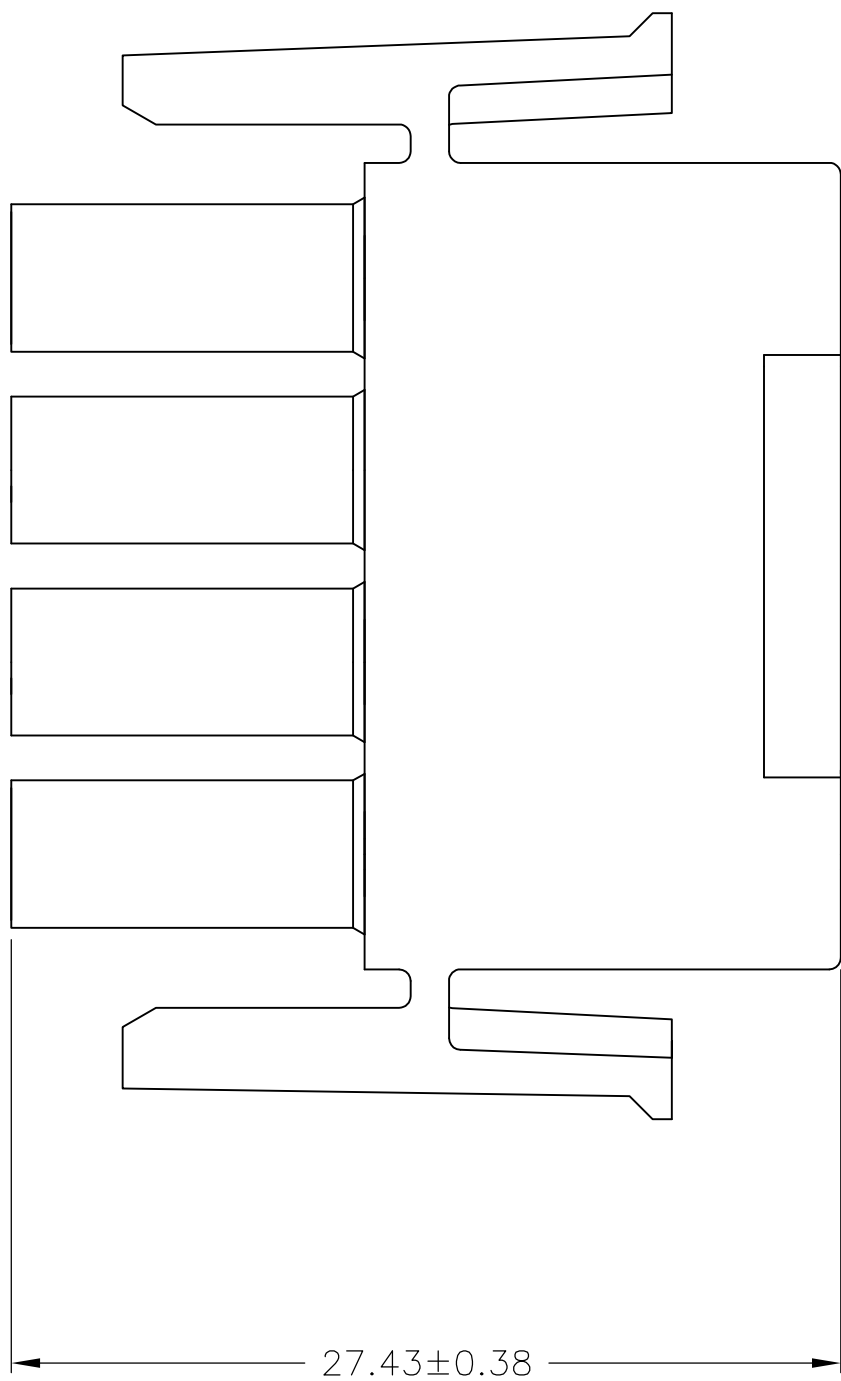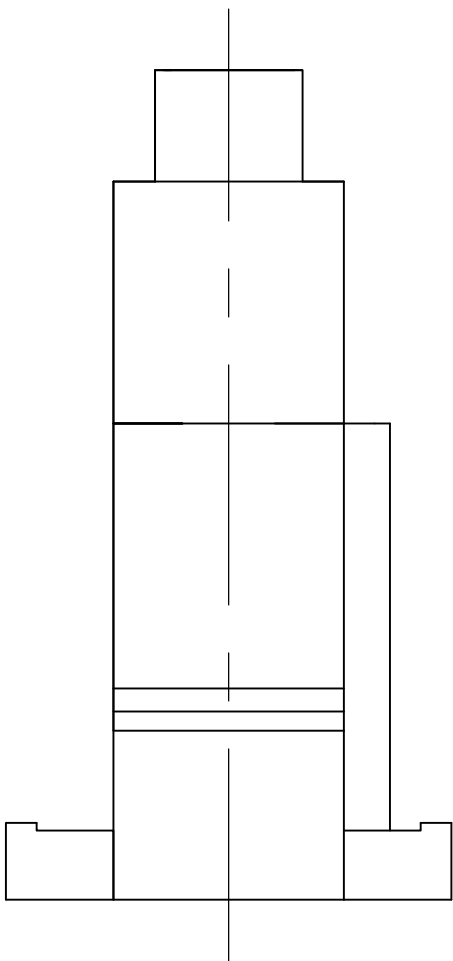

6.73	.265	-	-
5.97	.235	-	-
3.18	.125	27.43	1.080
0.38	.015	26.67	1.050
0.25	.010	14.73	.580
0.13	.005	7.62	.300
MM	IN	MM	IN
CONVERSION TABLE			

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. VESTAL 08FEB95	NATURAL COLOR		2-480702-0 PART NUMBER
DIMENSIONS: mm		CHK R. SWING 08FEB95	TE Connectivity		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D.SELF 08FEB95	PLUG, 4 CIRCUIT, UNIVERSAL MATE-N-LOK(TM)		
0. PLC ± - 1. PLC ± - 2. PLC ± 0.13 3. PLC ± - 4. PLC ± - ANGLES ± ± 0°30'		NAME	SIZE A1		
MATERIAL NYLON, UL 94V-2		APPLICATION SPEC	CAGE CODE 00779		
FINISH -		RESTRICTED TO	DRAWING NO 480702		
CUSTOMER DRAWING		SCALE 4:1	SHEET 2		
		REV AP2			