
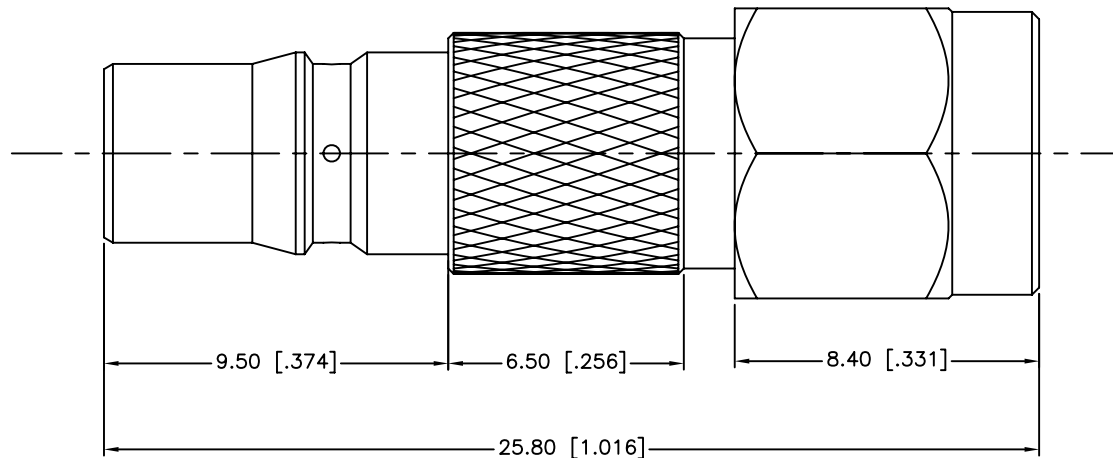


REV.	DATE	ECR NO.	DESCRIPTION
NC	01/06/12	XXXXXX	INITIAL RELEASE

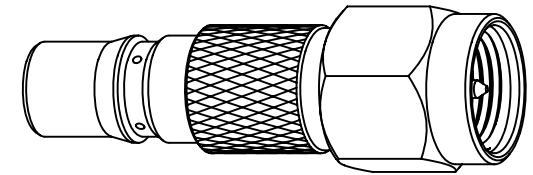

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC 0–18 GHz
3. VSWR(RETURN LOSS): 1.3 MAX @ DC TO 18 GHz;
4. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
5. DURABILITY: 100 CYCLES MIN.
6. TEMPERATURE RANGE: –65°C TO +165°C

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING					APPROVALS		DATE		Amphenol Connex						
					DRAWN		I.XU							05/02/12	
					CHECKED						PART DESCRIPTION QMA JACK TO SMA PLUG ADAPTOR				
					ISSUED										
SHEET		1 OF 1				PART NO. 242263									
CAD FILE		C:/CONNEX/242263.DWG				DWG. NO.		242263.DWG		REV.	NC	SIZE	A	SCALE	NA
3	CONTACT PIN	BRASS	GOLD	1											
2	INSULATOR	PTFE	NATURAL	1											
1	BODY	BRASS	NEXCOTE	1											
	DESCRIPTION	MATERIAL	FINISH	QTY											