


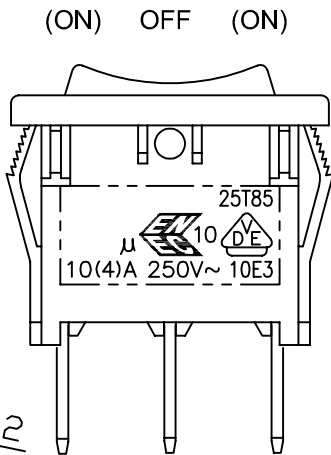
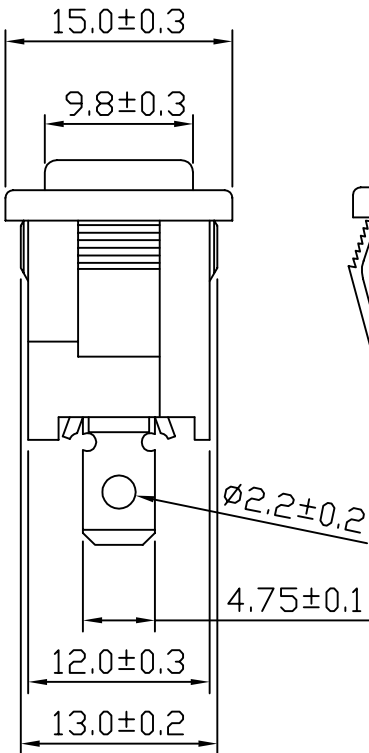

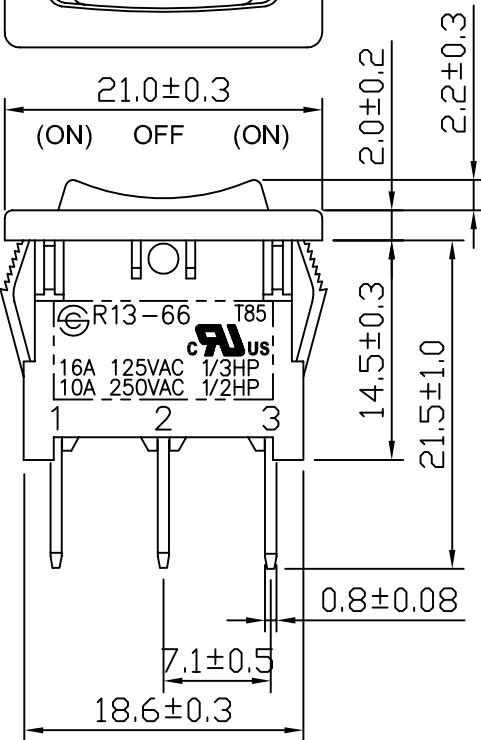


Rating	16A 125VAC 1/3HP 10A 250VAC 1/2HP		Mounting Hole 			Circuit Diagram 	
	10(4)A 250V~ 10E3						
	10A 125VAC, 6A 250VAC CQC						
Contact Resistance	50m ohm Max.						
Insulation Resistance	DC 500V 100M ohm Min.						
Dielectric Strength	AC 1500V 1 minute						
Operation Temperature	-25° C~85° C		Thickness	X	Y		
			0.75...1.25	19.2-0.1	13.2+0.1		
			1.25...2	19.4-0.1	13.2+0.1		
Switch Function	3P SPDT (ON)-OFF-(ON)		2...3	19.8-0.1	13.2+0.1		



Material:
 Frame: Nylon#66, Black
 Actuator: Nylon#66, Black
 Printed: None

C8\R13\R13-66H-02(1822761)_1

								△
11/17/'10	曹 盈 芳	本體刻字更新，重新出圖						△
Date	Name	Description						NO
Drawn	Checked	Approved	SCI BOM NO.	1822761		Model Name	ROCKER SWITCH	
曹 盈 芳		王 佰 山	Customer No.			Model No.	R13-66I-02	Rev.
11/17/'10		11/19/'10	Unit	mm	Ⓢ Shin Chin Industrial Co., Ltd.			1