
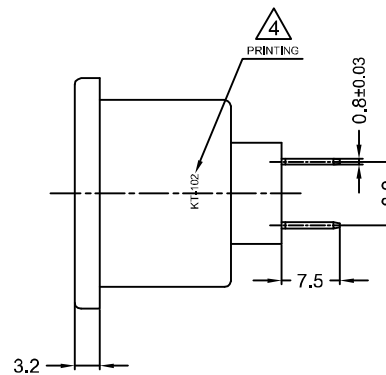


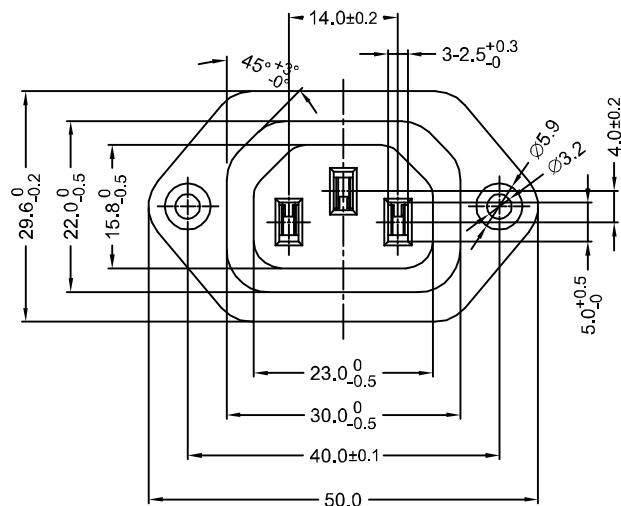

SPECIFICATION MODEL: KT SERIES

RATING: 15A 250VAC (UL/CUL)



10A 250VAC (VDE /CCC)

INSULATION RESISTANCE: 100M Ω (MIN), DC 500V

DIELECTRIC STRENGTH: 2,000VAC FOR 1 MINUTE

MATERIAL

HOUSING: PBT+15%GF UL 94V-0

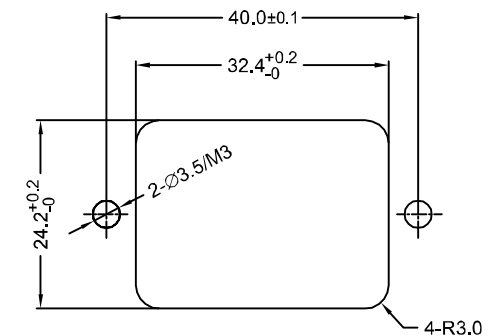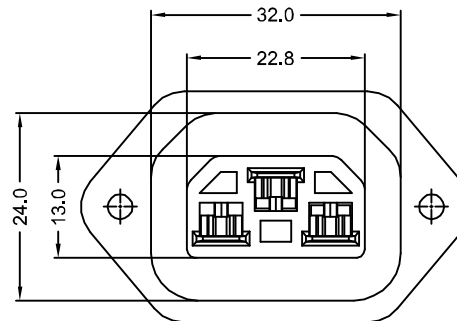

PANEL CUT-OUT



NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.3 mm

REVISION	DESCRIPTION	REVISED BY	TOLERANCES			ANGLE $\frac{1}{2}^\circ$	ϕ	∇	UNIT	mm	PART NAME	KT SPEC DRAWING	DWG NO
4	2015.04.02	依3C要求, 增印產品型號	楊偉韶	DRAWN BY	謝平凡	DESIGNED BY	蔡劍	SCALE	1/1		PART NO	KT-102	S1539D
3	2014.06.09	整理圖面, 重新出圖	謝平凡	CHECKED BY	蔡劍	APPROVED BY	蔡劍	DATE	2005.9.20				
2	2007.01.03	增加公差文字說明, 重新出圖	楊紹才										
1	2006.10.11	新增規格, 首次出圖	楊紹才										