

MCHQ200V-GE series

200W Constant Voltage LED Switching Power Supply





■ Features:

- Constant voltage design
- European AC input range (max. 305VAC)
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- High surge protection: 4kV – differential mode, 6kV – common mode
- IP67 protection class
- Suitable for dry, humid and rainy environment

CONSTANT VOLTAGE

SELV IP67

PFC

110

M

M

UK

CA

CE

ELECTRICAL SPECIFICATION

MODEL	MCHQ200V12-GE			MCHQ200V24-GE			
OUTPUT							
<i>RATED VOLTAGE</i>	12V			24V			
<i>RATED CURRENT</i>	16.6A			8.33A			
<i>RATED POWER</i>	200W			200W			
<i>LINE REGULATION</i>	± 1%			± 1%			
<i>LOAD REGULATION</i>	± 1%			± 1%			
<i>VOLTAGE RIPPLE (PK-PK)</i>	± 2%			± 2%			
<i>SETUP, RISE TIME</i>	100ms, 300ms / 230Vac			100ms, 300ms / 230Vac			
INPUT							
<i>VOLTAGE RANGE</i>	180 ÷ 305Vac (refer to Derating Curve)						
<i>FREQUENCY RANGE</i>	47 ÷ 63Hz						
<i>POWER FACTOR (TYP.)</i>	PF > 0.98 / 230VAC at full load (refer to PF curve)						
<i>THD (MAX.)</i>	10% / 230VAC at full load (refer to THD curve)						
<i>EFFICIENCY (TYP.)</i>	92%			93%			
<i>AC CURRENT (MAX.)</i>	1.2A/230VAC						
<i>INRUSH CURRENT (MAX.)</i>	62A / 230VAC; T _{WIDTH} = 1300μs						
<i>MAX. NO. OF PSU ON CIRCUIT BREAKER</i>		B10	B16	C10	C16	D10	D16
	12V	4	6	8	6	10	13
	24V	4	6	8	6	10	13
<i>LEAKAGE CURRENT (MAX.)</i>	0.7mA / 230VAC at full load						
<i>NO LOAD POWER CONSUMPTION (MAX.)</i>	0.5W / 230VAC						

MCHQ200V-GE series

200W Constant Voltage LED Switching Power Supply



PROTECTIONS

OVER LOAD	Range: 110 ÷ 160% rated load
	Type: hiccup mode. Recovers automatically after fault condition is removed.
SHORT CIRCUIT	Type: hiccup mode. Recovers automatically after fault condition is removed.
OVER VOLTAGE	Range: 150% rated voltage
	Type: shut down output voltage. Re-power on to recovery.
OVER TEMPERATURE	110°C
	Type: shut down output voltage. Re-power on to recovery.

WORKING ENVIRONMENT

WORKING TEMPERATURE	-40°C ÷ +65°C; tc=90°C (refer to derating curve)
WORKING HUMIDITY	10 ÷ 90% RH non-condensing
STORAGE TEMPERATURE AND HUMIDITY	-40°C ÷ 85°C, 10 ÷ 90% RH non-condensing
Tc	tc=90°C / tc=75°C for 5 years warranty

SAFETY and EMC STANDARDS

SAFETY STANDARDS	Compliance to EN61347-1, EN61347-2-13, EN 62493
EMC EMISSION	Compliance to EN55015
EMC IMMUNITY	Compliance to EN61547
HARMONIC CURRENT	Compliance to EN61000-3-2 class C, EN61000-3-3
OTHER REGULATIONS	Compliance to Commission Regulation (EU) 2019/2020
WITHSTAND VOLTAGE	IN/OUT: 3200VAC / 5mA, 60s
	IN/GND: 1600VAC / 5mA, 60s
	OUT/GND: 1000VAC / 5mA, 60s
INSULATION RESISTANCE	IN/OUT: ≥ 10MΩ / 500VDC
GROUNDING RESISTANCE	≤ 0.1Ω / 25A, 1min
IP PROTECTION CLASS	IP67

MCHQ200V-GE series

200W Constant Voltage LED Switching Power Supply



OTHERS

MTBF	200 000 hours / 25°C, full load (MIL-HDBK-217F)
LIFETIME	55 000 hours / 230VAC, full load, $t_c=75^{\circ}\text{C}$
DIMENSIONS	220.6 x 62.5 x 41.3mm (L x W x H)
WEIGHT AND PACKING	0.9kg ; 10pcs./ctn; ctn dimensions: 26.5 x 19 x 25.5cm
PRIMARY CABLE	H05RN-F 105°C 3Gx1.0mm ² , length = 300 ± 30mm
SECONDARY CABLE	12V: SJTW, 2*14AWG / 2*2.08mm ² , 105°C, length = 300 ± 30mm
	24V: SJTW, 2*16AWG / 2*1.31mm ² , 105°C, length = 300 ± 30mm

EAN Code



5 902135 151839



5 902135 151846

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.

2. Power supply is considered as component not intended to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-qualified to comply with EMC Directives.

MECHANICAL SPECIFICATION

INPUT

H05RN-F 105°C 3Gx1.0mm²
length = 300mm ± 30mm


OUTPUT

12V: SJTW, 2*14AWG / 2*2.08mm², 105°C
24V: SJTW, 2*16AWG / 2*1.31mm², 105°C
length = 300mm ± 30mm

AC/L(brown)

AC/N(blue)

GND(yellow-green)

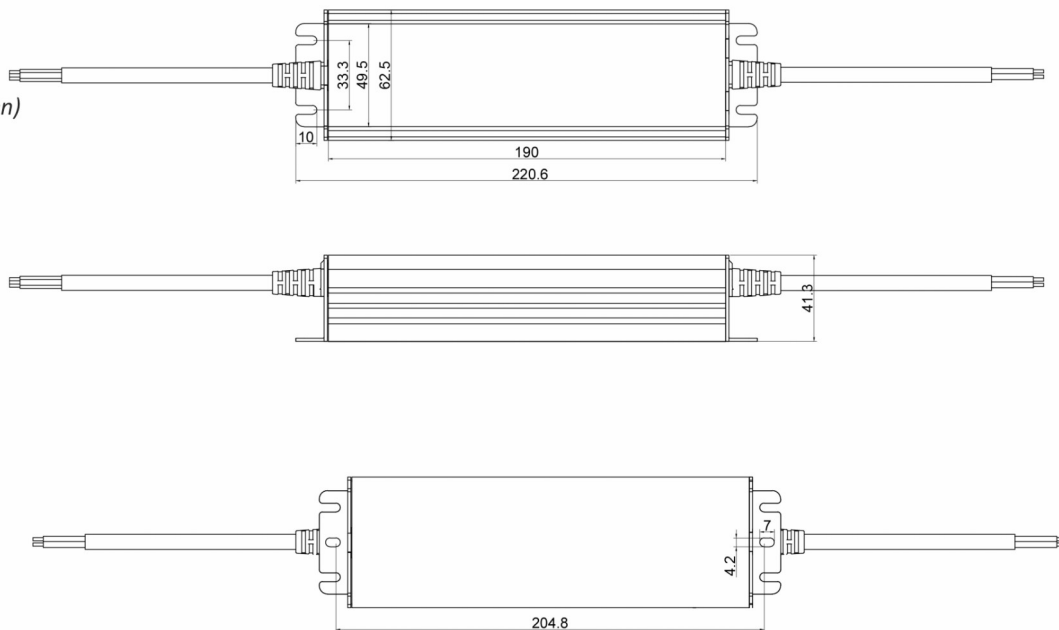

V+ (white)

V- (black)


MCHQ200V-GE series

200W Constant Voltage LED Switching Power Supply




CHARACTERISTICS


DERATING CURVE

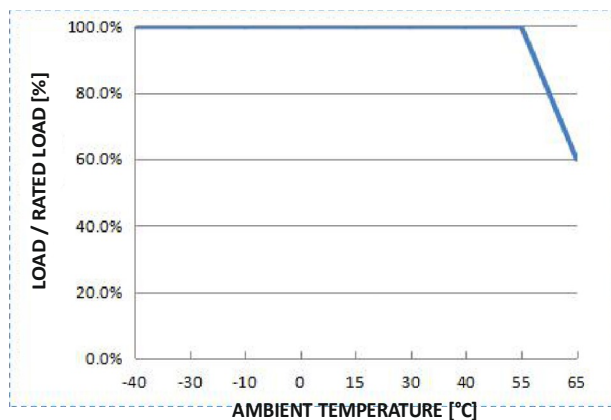


STATIC CHARACTERISTICS

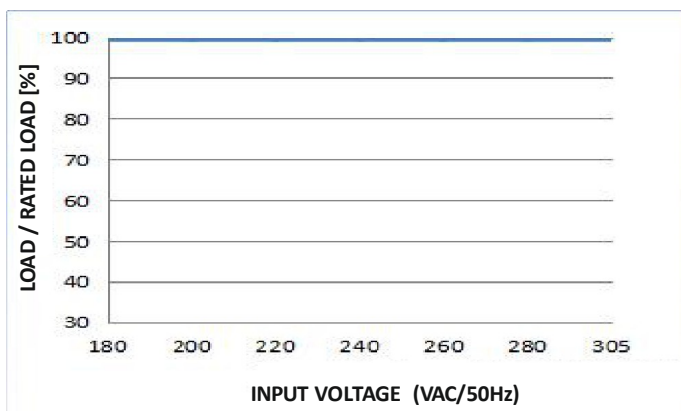


I-V CURVE

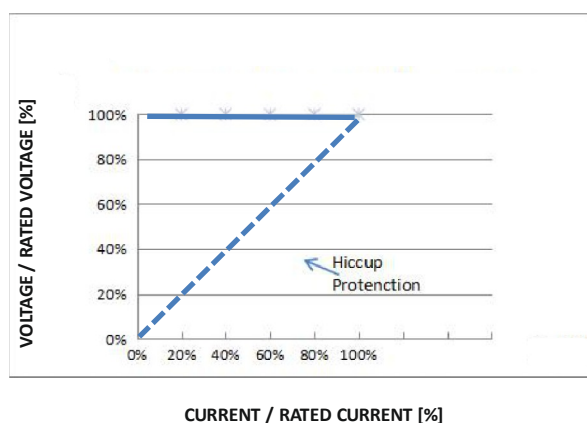

PF CURVE

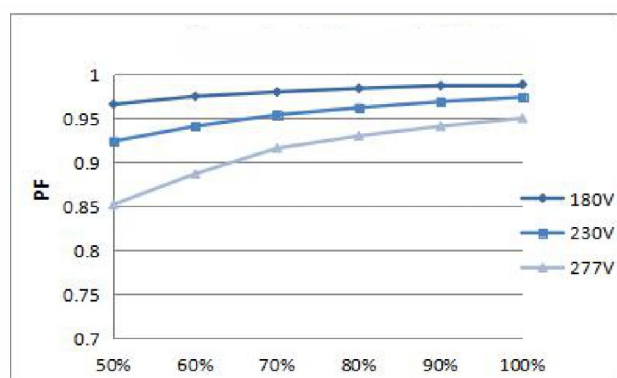

THD Curve

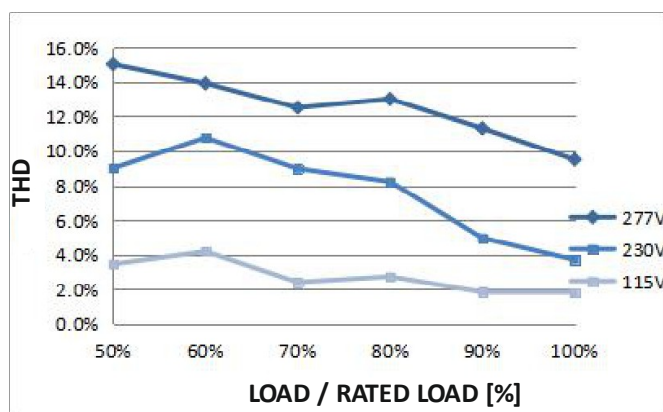

EFFICIENCY CURVE

