
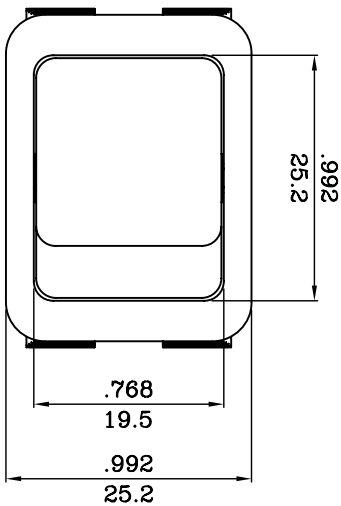
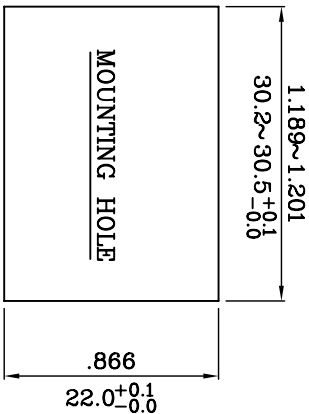
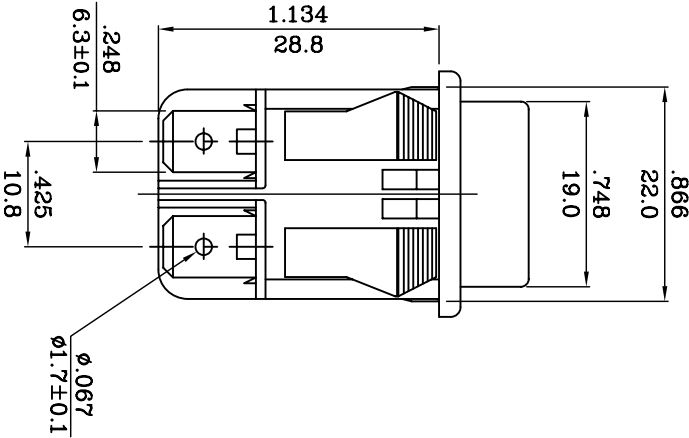
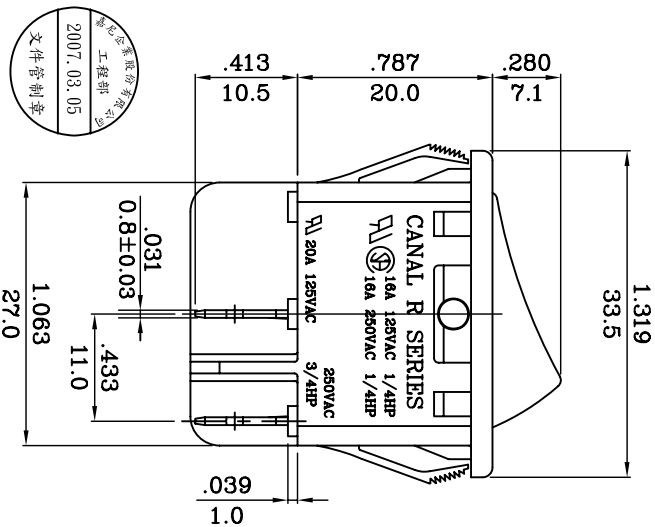


- ROCKER SWITCH MODEL: R SERIES
- RATING:(1) 16A 125VAC 1/4HP(UL/CSA)
- (2) 16A 250VAC 1/4HP (UL/CSA)
- (3) 20A 125VAC 3/4HP 250VAC (UL)
- (4) 16(4)A 250V~T125 (1E4) (VDE/SEMKO/DEMKO
- (5) 10(2)A 250V~T125 (5E4) NEMKO/FIMKO/SEV/CQC)
- (6) 16(8)A 250V~T125(VDE/ENEC)
- DIELECTRIC WITHSTAND VOLTAGE: 1000VAC 1 MIN
- INSULATION RESISTANCE:100MΩ (MIN)
- CONTACT RESISTANCE:20mΩ (MAX.)
- ILLUMINATED:200~250VAC

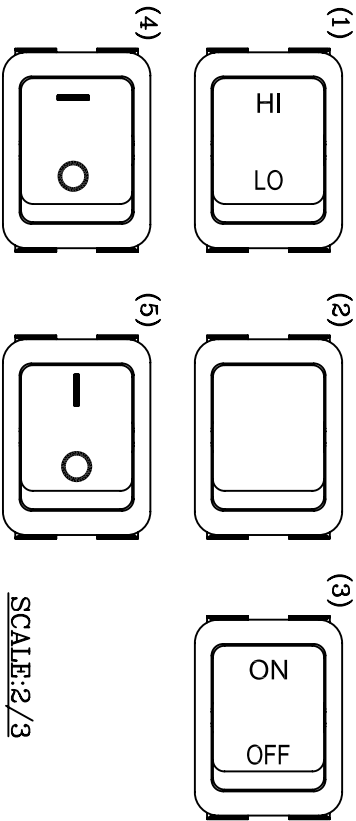

NOTE: 1. TOLERANCES UNLESS OTHERWISE SPECIFIED:±.012⁰¹²(in/mm)

2. IT IS IN COMPLIANCE WITH CANAL ROHS SPECIFICATION:WI-QA-24

REVISION	DESCRIPTION	REVISED BY	TOLERANCES	XX	ANGLE	1°	SCALES	UNIT	PART NAME	R SPEC DRAWING	DWG NO
△								mm			
△			DRAWN BY	楊紹才	DESIGNED BY	楊紹才	SCALE	5:4			
△			CHECKED BY	楊紹才	APPROVED BY	楊紹才	DATE	2007.01.29	PART NO	R210-1-C*G-**9	S1729A
△	2007.01.29	新增規格, 首次出圖		楊紹才							