

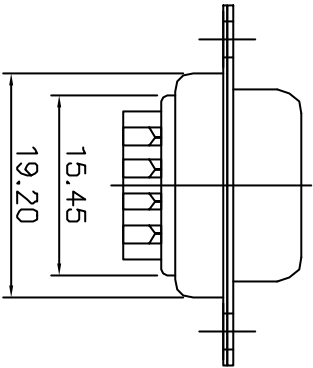


FEMALE

Specifications

- Contact Resistance: 30m ohms max. at DC 100mA
- Insulator Resistance: 1000M ohms min. at DC 500V
- Current Rating: 5 AMP
- Dielectric Withstanding
- Voltage: AC 1000V For 1 minute
- Operating Temperature: -55°C ~ +105°C
- Shell : steel, tin plated
- Contact: Brass
- Plating mating area : Selective gold over 50" Ni
- Tails : Tin over 50" Ni
- Housing: PBT & 30% Glass Fiber (UL 94V-0)
- ROHS compliant
- MSL components : level 3
- MSL packaging : level 1

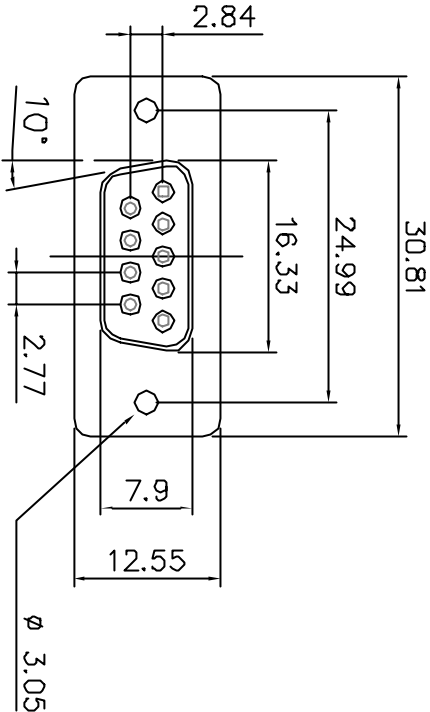

Drawing number	Contact plating
L77SDE09S	Gold flash
L177SDE09S	.15μ inches
L77SDE09SC309	.30μ inches

TOLERANCE: n/n		APPROVALS		TITLE	
X	QDR	DESIGN	QDU	DATE	
XXX	01	DRAWING	F.L.	07/12/08	SD SERIES D-SUB CONNECTOR SOLDER CUP SOCKET
XXX	03	APPROVED	F.L.	07/12/06	
XXX	04			07/19/04	
		UNIT	MM	SIZE	A4
				SCALE	N.A.
		L-77SDE09S----			REV.
					B