

REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
B	PROPOSAL DRAWING (EAR 14575)	SEP28/17	A.G.
C	UPDATING COMMON TERMINOLOGY	MAY18/18	A.G.

NOTES:

- MATERIAL: ALL MATERIALS ARE RoHS COMPLIANT PER EU DIRECTIVE 2011/65/EU
HOUSING: THERMOPLASTIC PBT, UL FLAMMABILITY RATING 94V-0, BLACK
CONTACT: COPPER ALLOY PLATED WITH GOLD FLASH OVER NICKEL
DUST CAP: SILICONE RUBBER, BLACK
FRONT HOUSING: ZINC ALLOY PLATED WITH CHROME OR THERMOPLASTIC PBT, SEE BELOW TABLE
HEX NUT: STEEL PLATED WITH NICKEL OR THERMOPLASTIC PBT, SEE BELOW TABLE
- ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 10A
OPERATING VOLTAGE: 500V AC MAXIMUM
DIELECTRIC WITHSTANDING VOLTAGE: 2500V DC
CONTACT RESISTANCE: 5.0mΩ MAXIMUM.
- RECOMMENDED PANEL THICKNESS: 2.5 (0.098) TO 3.0 (0.118).
- ENVIRONMENTAL PROTECTION: IP67 PER IEC 60529 IN THE MATED CONDITION.

ORDERING CODE: M R D - B X 0 3 - L 1 3 - 0 0 0

SERIES

CONTACT SIZE & MECHANISM

B=1.5mm & LATCH LOCK

HOUSING ORIENTATION & CONTACT TYPE

G=FEMALE METAL HOUSING & PIN CONTACT

J=FEMALE PLASTIC HOUSING & PIN CONTACT

NUMBER OF CONTACTS

03=THREE CONTACTS

SPECIALS

000=STANDARD

MOUNTING/COVER OPTIONS

3= PANEL MOUNT WITH DUST COVER

CONTACT TERMINATION TYPE

L1=SOLDER CUP


CONNECTOR PART NUMBER	FRONT HOUSING MATERIAL	HEX NUT MATERIAL
MRD-BG03-L13-000	ZINC / CHROME	STEEL / NICKEL
MRD-BJ03-L13-000	PBT	PBT

UNLESS SPECIFIED OTHERWISE	DRAWN K.XIONG	SEP28/17
PRIMARY UNITS MILLIMETERS	CHECKED K.LAMBIE	MAR14/18
SECONDARY INCHES	M.E. APP'D	
REFERENCE IN PARENTHESES	Q.A. APP'D	
GENERAL TOLERANCES	DWG APP'D A.GREEN	MAR14/18
1 DECIMAL PLACE ±0.25	ENG. REL. NO.	
2 DECIMAL PLACES ±0.15	REF. EAR 14575	
3 DECIMAL PLACES ±0.05	THIRD ANGLE PROJECTION	
ANGULAR DEGREES	DO NOT SCALE DRAWING	


Amphenol Canada Corp.
Commercial Products

MRD SERIES RUGGED CONNECTOR, FEMALE WITH 3 PIN CONTACTS, LATCH LOCK, PANEL MOUNT WITH DUST COVER, IP67 RATING, RoHS COMPLIANT




DWG NO.	REV
P-MRD-BX03-L13-000	C
CODE ID NO. 03554	DWG SIZE X
SCALE XX:1	SHEET 1 OF 1

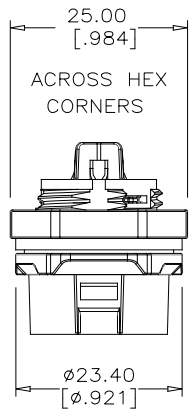

SOLDER CUP ACCEPTS UP TO 16 AWG WIRE

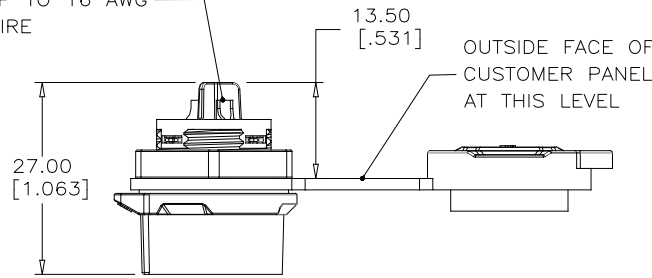

OUTSIDE FACE OF CUSTOMER PANEL AT THIS LEVEL

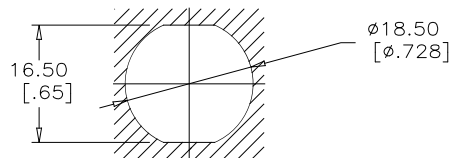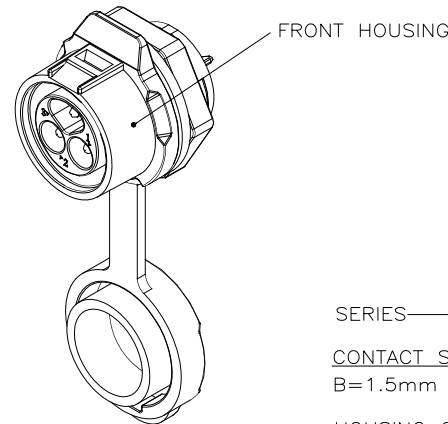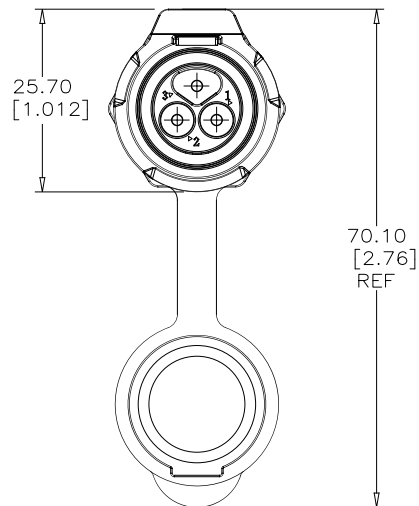

RECOMMENDED PANEL HOLE



THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.