
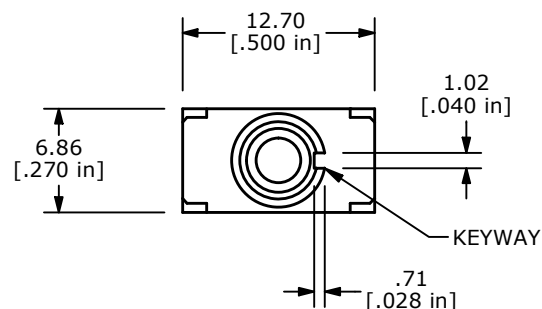
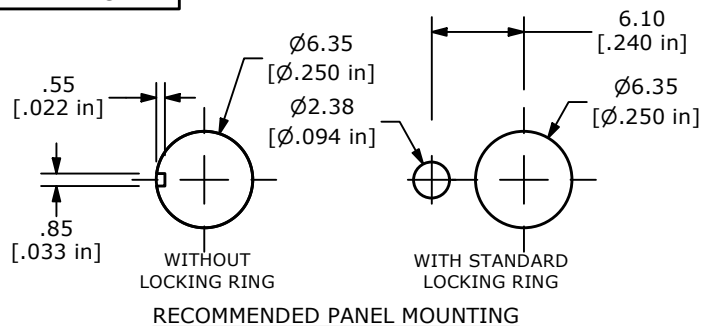
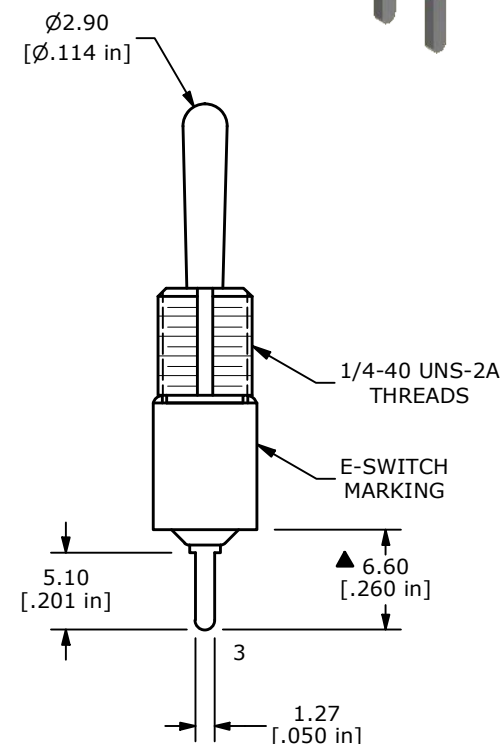
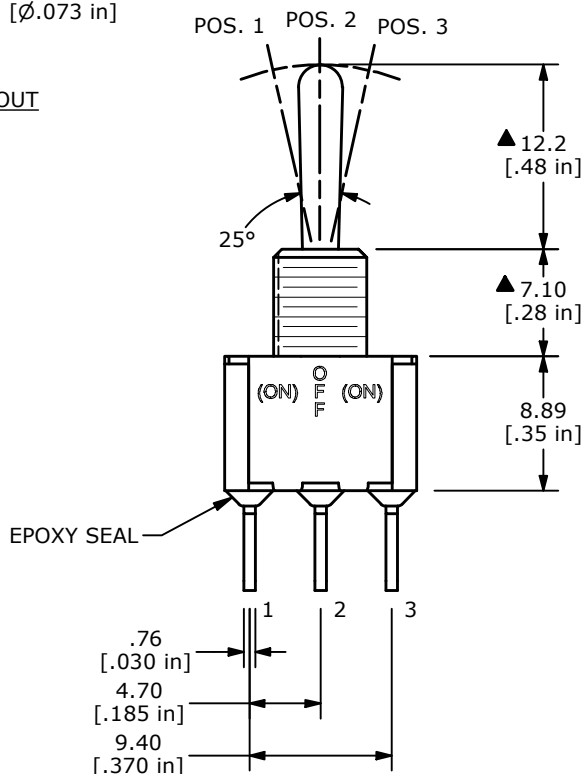



| ▲ SWITCH FUNCTION |        |        |
|-------------------|--------|--------|
| POS. 1            | POS. 2 | POS. 3 |
|                   |        |        |
| (ON)              | OFF    | (ON)   |
| (ON)              | OPEN   | 2-1    |

( ) = DENOTES MOMENTARY

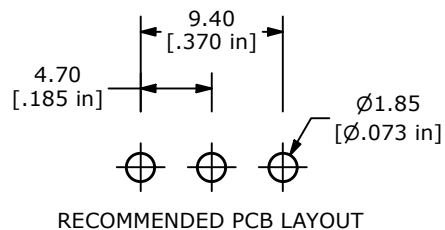

## NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER
- RATING: 2A @ 250 VAC  
5A @ 120 VAC OR 28 VDC
- ELECTRIC LIFE: 6,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
- OPERATING TEMP.: -40°C TO 85°C
- ▲ DENOTES CRITICAL PARAMETER.
- HARDWARE TO BE SHIPPED BULK  
T100011 - LOCK WASHER - QTY 1  
T100015 - LOCK RING - QTY 1  
T100000 - HEX NUT - QTY 2

| REV | ECO NO     | DESCRIPTION       | DATE     | BY |                                                                                        |  |  |  | OBJECT ID |
|-----|------------|-------------------|----------|----|----------------------------------------------------------------------------------------|--|--|--|-----------|
| B   | ECO-101927 | 100 SERIES UPDATE | 05/16/23 | MR | <b>TITLE</b> 100SP4T1B3M2QE                                                            |  |  |  | 000023037 |
|     |            |                   |          |    | <b>SCALE</b> 2:1 <b>DATE</b> 12/26/2008 <b>DR</b> BLR <b>DWG</b> ST114003 <b>REV</b> B |  |  |  |           |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED