


REV.	DATE	DESCRIPTION
NC	02/24/03	INITIAL RELEASE

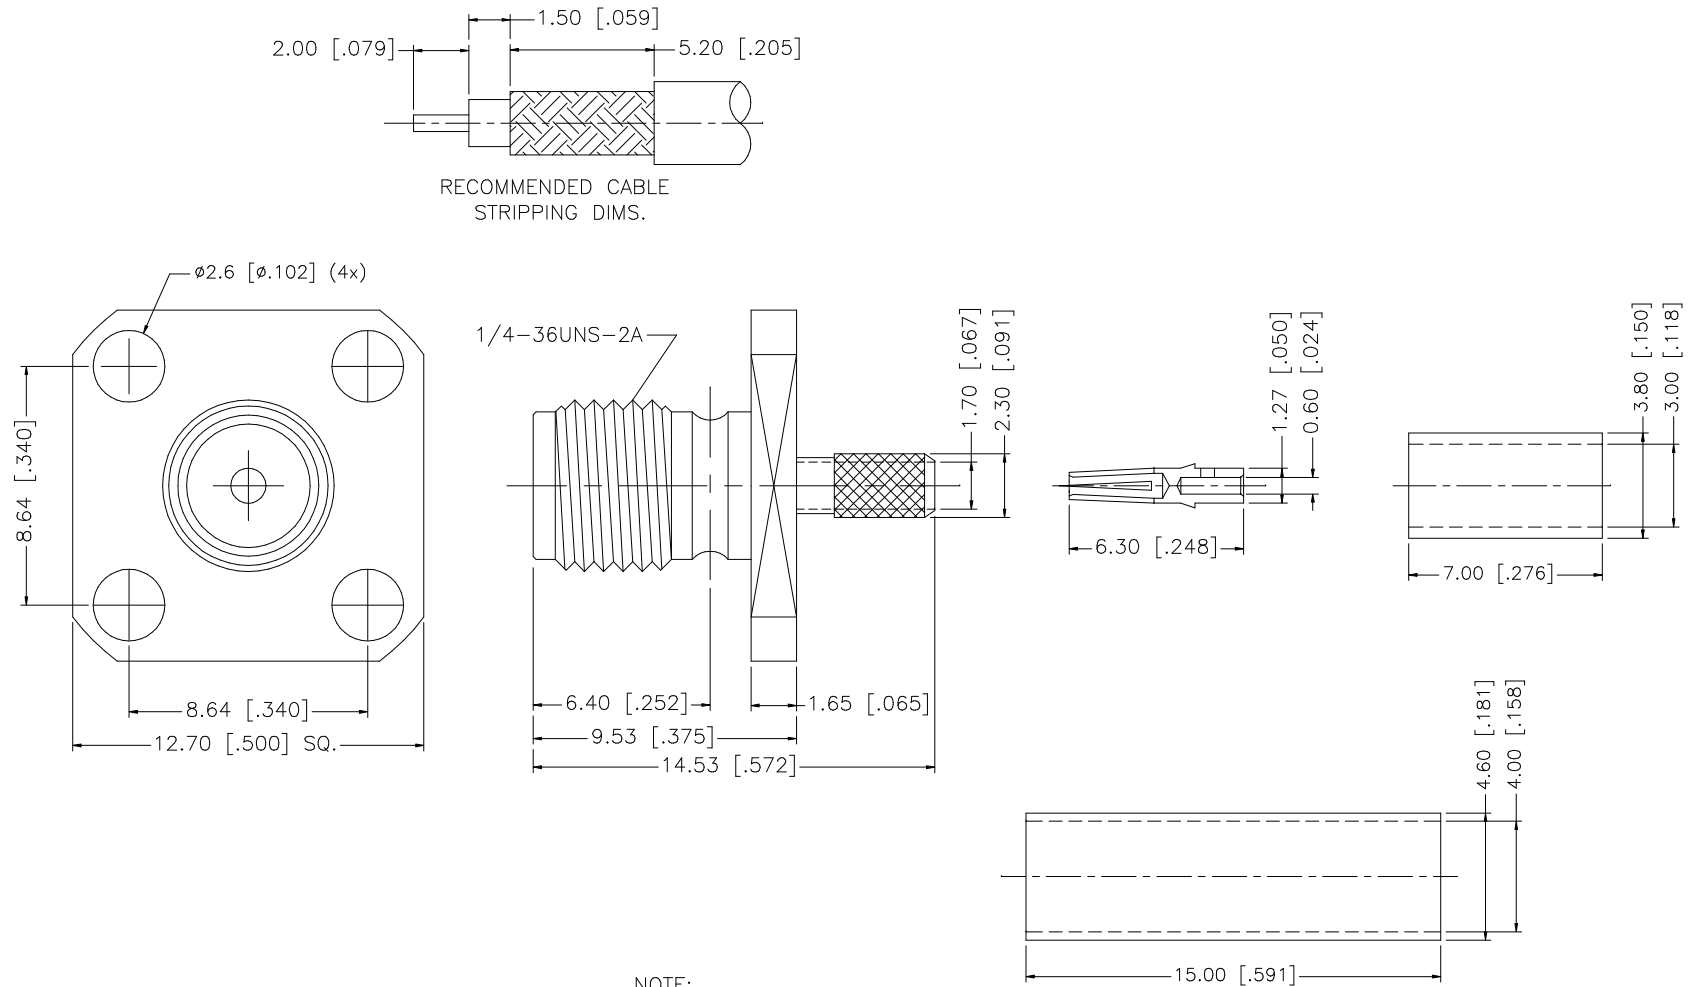

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	APPROVALS		DATE		Amphenol Connex						
8						DRAWN	G.R.S.	02/24/03								
7						CHECKED										
6						UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	ISSUED					PART DESCRIPTION				
5	HEAT SHRINK TUBE			1	SHEET		1 OF 1		SMA PANEL CRIMP JACK (FOR RG-174/U, 188A/U, 316/U)							
4	FERRULE	COPPER	GOLD	1	DO NOT SCALE DRAWING					PART NO.						
3	CONTACT PIN	BER. COPPER	GOLD	1	C:/132/132121.DWG					132121						
2	INSULATOR	TEFLON	NATURAL	1		DWG. NO.		132121.DWG			REV.	NC	SIZE	A	SCALE	NA
1	BODY	BRASS	GOLD	1												
	DESCRIPTION	MATERIAL	FINISH	QTY												