
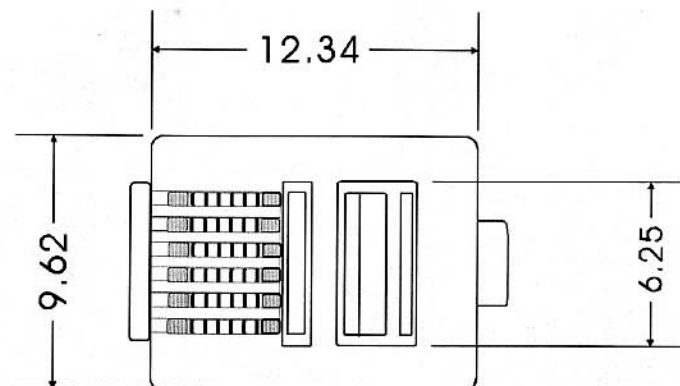


WITH FLAT CABLE

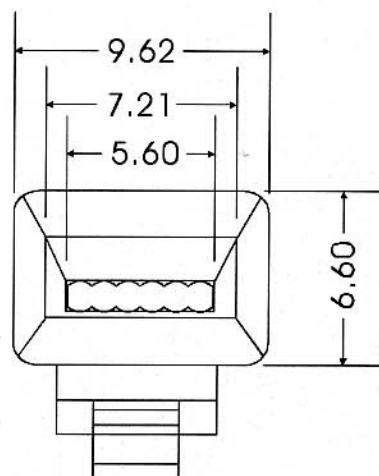

SPECIFICATIONS:

1.ELECTRICAL:

UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
DIELECTRIC WITH STANDING VOLTAGE : 500 VOLTS AC.
INSULATION RESISTANCE: 500
TERMINATION: RESISTANCE 35 MEGAOHMS.




2.MECHANICAL:

CABLE-TO-PLUG TENSILE STRENGTH : 20 lbs (89N) MIN.
DURABILITY : 2000 MATING CYCLES.

3.MATERIAL & FINISH:

HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
COLOR : (TRANSPARENT COLOR AVAILABLE).
CONTACT BLADE: PHOSPHOR BRONZE
CONDUCTOR : STRANDED, 24-26 AWG.
GOLD PLATING: 3-50u" ARE AVAILABLE

WITH ROUND CABLE

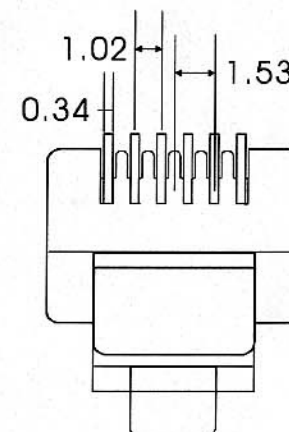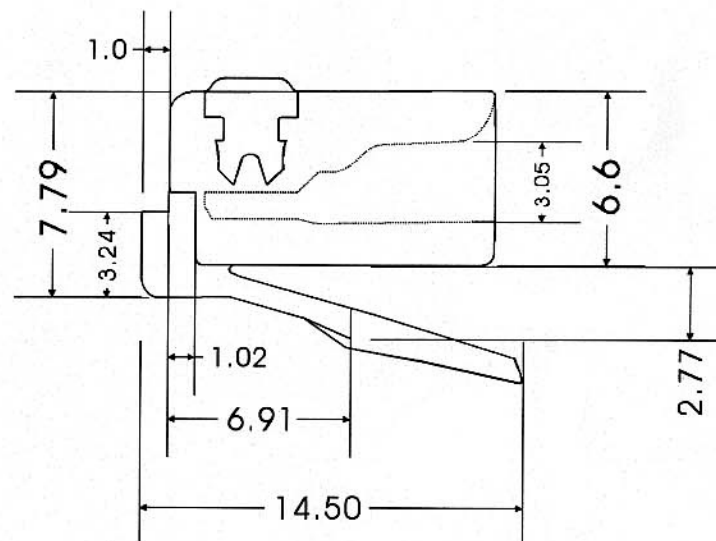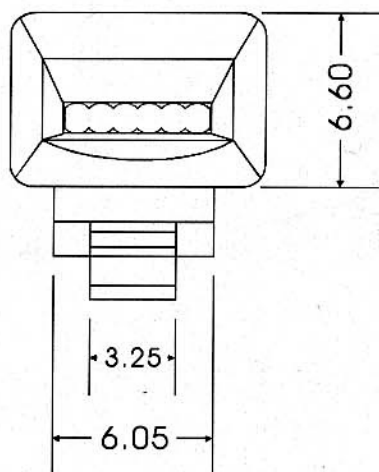

2000/05/14

DWG.
TINA

APPROVED
SHELLEY

UNIT		SCALE	PART NAME	
MM		2 : 1	PLUG COVER	
APPD.	CKD.	TOLERANCE	PART NO.	REV.
		± 0.5		A