


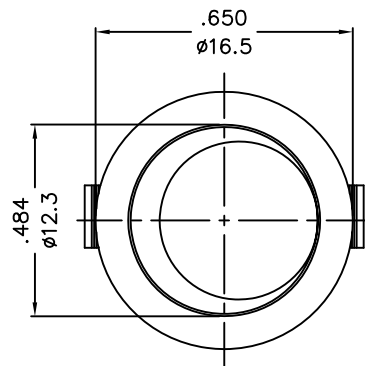
ROCKER SWITCH MODEL MR5 SERIES

RATING: 3A 250VAC (cURus)


6A 125VAC (cURus)

3A 250V~ μ T100/55 (ENEC15/CQC)


DIELECTRIC VOLTAGE-WITHSTAND: 1,500VAC FOR 1 MINUTE

INSULATION RESISTANCE: DC 500V 100M Ω (MIN.)CONTACT RESISTANCE: 20m Ω INITIAL (MAX.)


ON-OFF




(1)




(3)







(4)



(5)



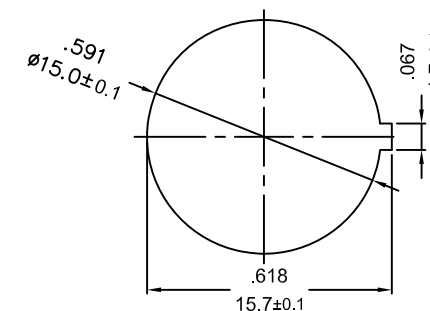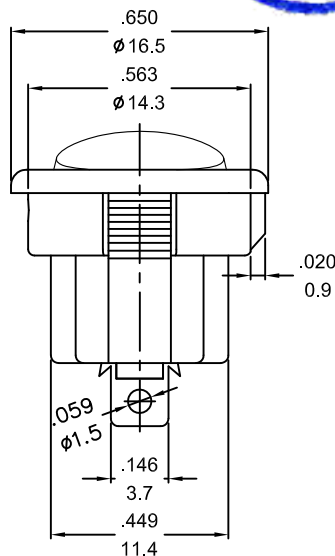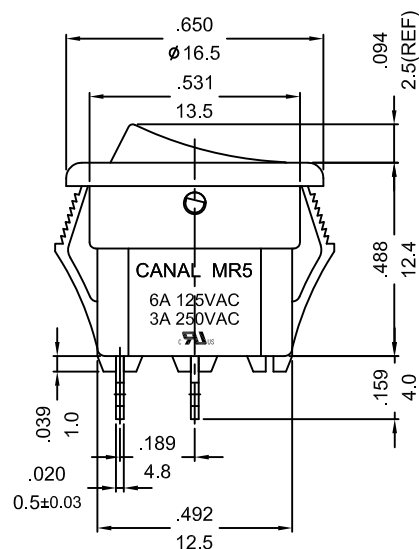(6)

 $X=(1.0\sim 2.0\text{mm})$
PANEL THICKNESSNOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED: $\pm 0.12/0.3$ (in/min)

REVISION	DESCRIPTION	REVISED BY	TOLERANCES			ANGLE $\frac{1}{2}^{\circ}$		UNIT	mm	PART NAME	MR5 SPEC DRAWING	DWG NO
4			DRAWN BY	周俊	DESIGNED BY	张斌	SCALE	2/1		PART NAME		
3			CHECKED BY	张斌	APPROVED BY	张斌	DATE	2024.11.25		PART NO	MR5-111R**-N**A-0N2C	S10126A
2												
1	2024.11.25 首次出图	周俊										