


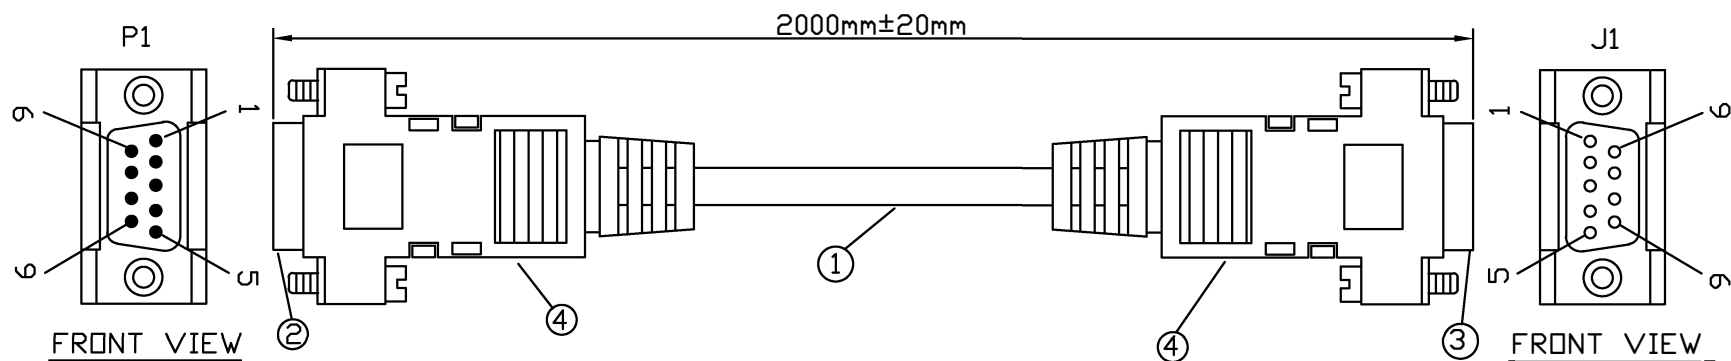

- 1.CABLE:NO UL,28AWG(7/0.12±0.008mm),TINNED AND STRANDED COPPER WIRE
INSULATOR:PVC,ID:0.85mm ,CABLING:9C+DRAIN WIRE
SHIELD:AL/MY COVERAGE
JACKET:PVC,COMPLIANCE ROHS,COLOR:BEIGE,D.D:5mm
- 2.1PCS CONNECTOR:D-SUB 9 WAYS MALE SOLDER TYPE CONNECTOR
INSULATOR:P.B.T.+GLASS FIBER,COLOR:BLUE
CONTACT:COPPER ALLOY,GOLD FLASH OVER NICKEL PLATED
SHELL:NICKEL PLATED,
CONNECTOR COMPLIANCE ROHS
- 3.1PCS CONNECTOR:D-SUB 9 WAYS FEMALE SOLDER TYPE CONNECTOR
INSULATOR:P.B.T.+GLASS FIBER,COLOR:BLUE
CONTACT:COPPER ALLOY,GOLD FLASH OVER NICKEL PLATED
SHELL:NICKEL PLATED,
CONNECTOR COMPLIANCE ROHS
- 4.HOOD:ASSEMBLY TYPE DB9 PIN PLASTIC COVER WITH SMALL SCREW
COLOR:BEIGE,COMPLIANCE ROHS
- 5.Fulfill ROHS Guideline
- 6.ELECTRONIC TEST:100% OPEN SHORT+MISS WIRE TEST

PIN OUT

DB9PIN MALE(P1)	WIRE	DB9PIN FEMALE(J1)
1		1
2		2
3		3
4		4
5		5
6		6
7		7
8		8
9		9
SHELL	DRAIN WIRE	SHELL

PART NO CAB-09GW/2-S

SHEET NO 1

THIRD ANGLE PROJECTION

TITLE: DB9 PIN MALE TO DB9 PIN FEMALE
ASSEMBLY TYPE,BEIGE COLOR,L:2M

SCALE/N.T.S/DRAWN BY & DATE

SIZE A4/CHECKED BY & DATE

UNIT
☒ mm ☐ INCH
APPROVED BY & DATE

DWN NO D-CAB-09GW/2-S

