


2			1					
LOC	DIST	REVISIONS						
H	—	P	LTR	DESCRIPTION		DATE	DWN	APVD
			M2	REVISED PER ECO-11-005294		05APR11	RK	HMR

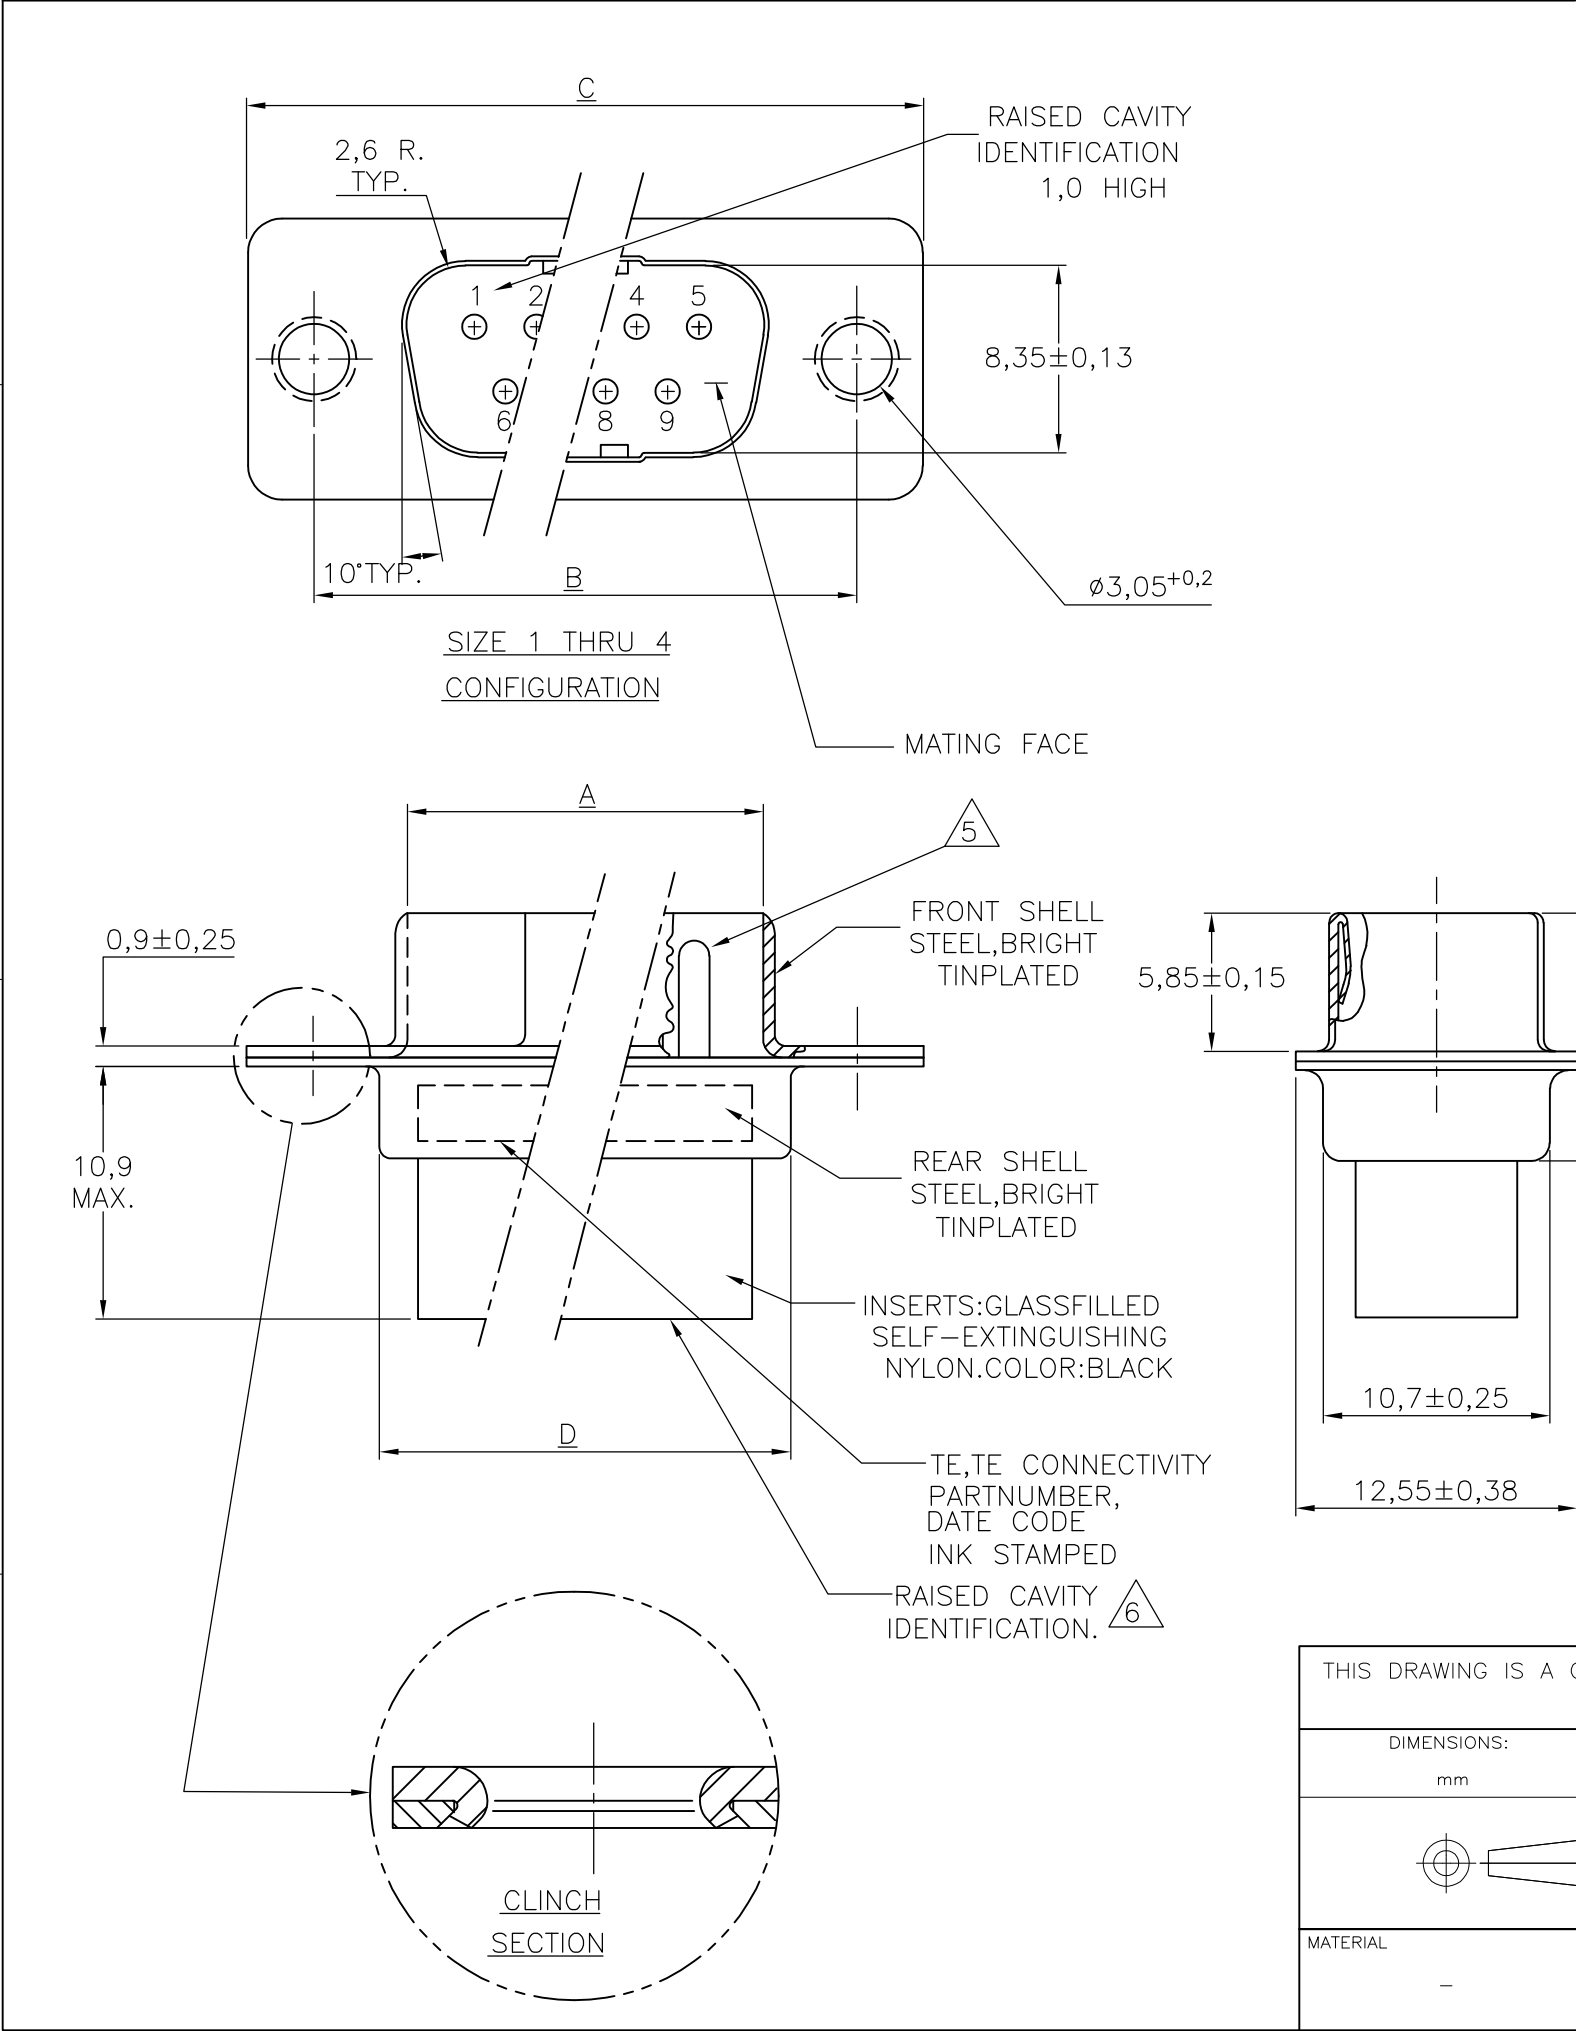

NOTES:

- THIS PLUG ACCEPTS SIZE 20 PIN CONTACTS.
- MAXIMUM WIRE INSULATION RECOMMENDED FOR USE WITH THIS PLUG IS 1,73 DIA. MAX..
- RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
- FOLLOWING INSERTION/REMOVAL TOOLS ARE RECOMMENDED FOR USE WITH THESE CONNECTORS:
32-28AWG/28-24AWG CONT's
91067-3 INSERTION/REMOVAL
726363-1 INSERTION ONLY
24-20AWG CONTACTS
91067-2 INSERTION/REMOVAL
726363-1 INSERTION ONLY
726364-1 REMOVAL ONLY

CONTACTS SHOWN FOR ILLUSTRATION ONLY, NO PART OF CONNECTOR PACKAGE ; MUST BE ORDERED SEPARATELY.


RAISED CAVITY IDENTIFICATION NUMBERS ON WIRE SIDE ARE WHITENED FOR -9 P/N'S.

						OBSOLETE	
55,3	66,9	61,1	52,9	50	5	167296-9	167296-1
57,7	69,3	63,5	55,4	37	4	167295-9	167295-1
41,3	53,0	47,0	39,0	25	3	167294-9	167294-1
27,5	39,1	33,3	25,3	15	2	167293-9	167293-1
19,3	30,8	25,0	16,9	9	1	167292-9	167292-1
D ±0,25	C ±0,38	B ±0,13	A ±0,13	NR.OF POS	SIZE	ORDER NUMBER	




FOR DETAILS SIZE 5, SEE SHEET 2.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.MOOIJ	20NOV87	TE Connectivity			
		CHK —	—				
		APVD —	—	NAME			
		PRODUCT SPEC		HDP-20 PLUG CONNECTOR, SIZE 1-4			
		APPLICATION SPEC					
				SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
				A3	00779	C-167292	—
				CUSTOMER DRAWING			
				SCALE	NTS	SHEET	1 OF 2
						REV	M2

LOC	DIST	REVISIONS					
H	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

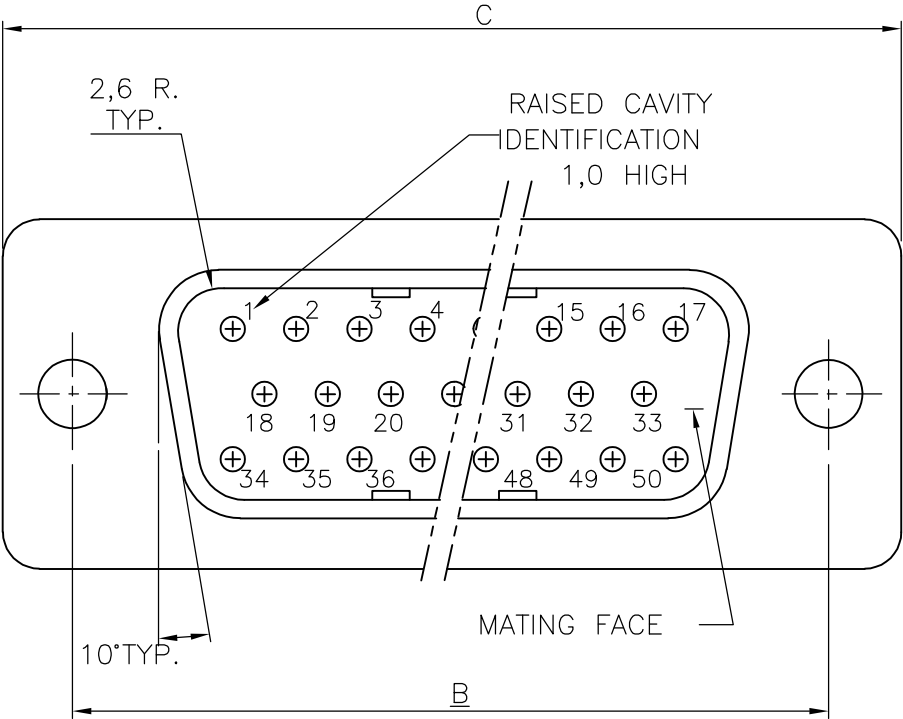

SIZE 5
CONFIGURATION

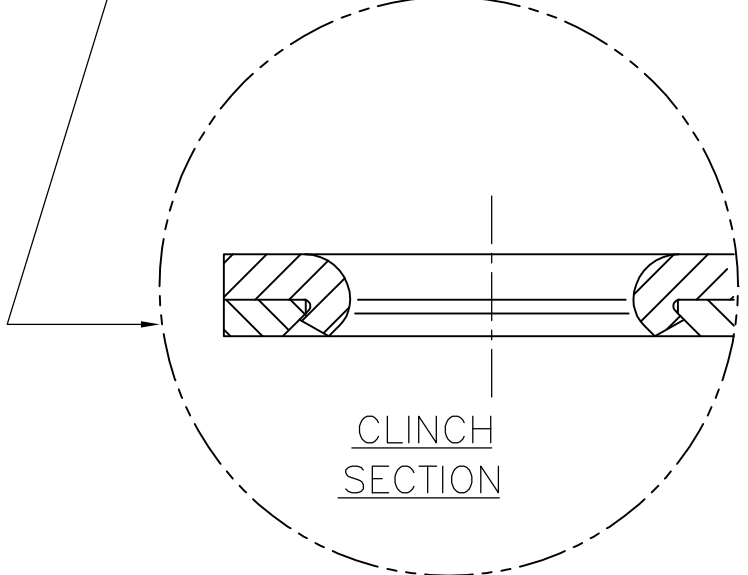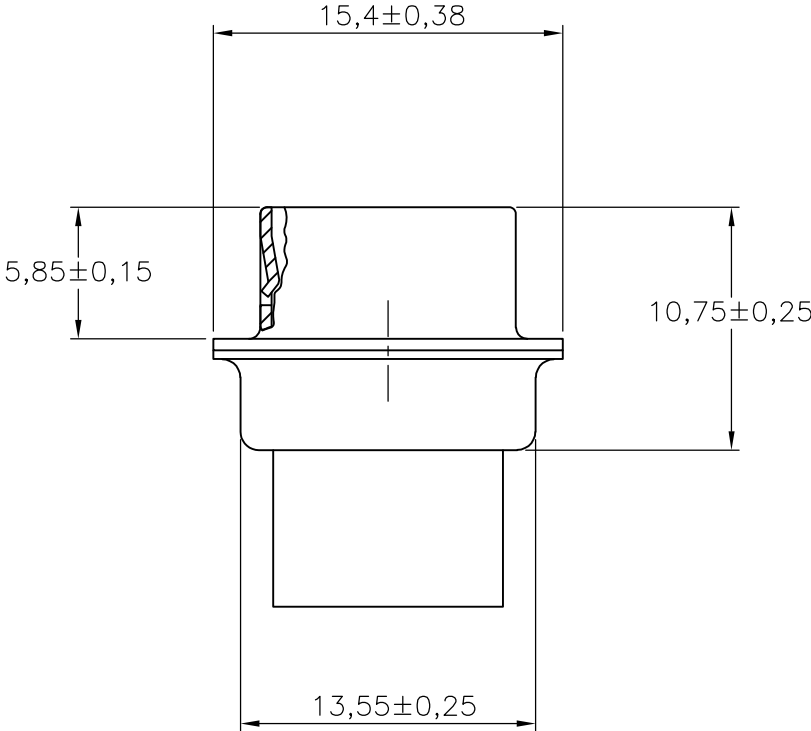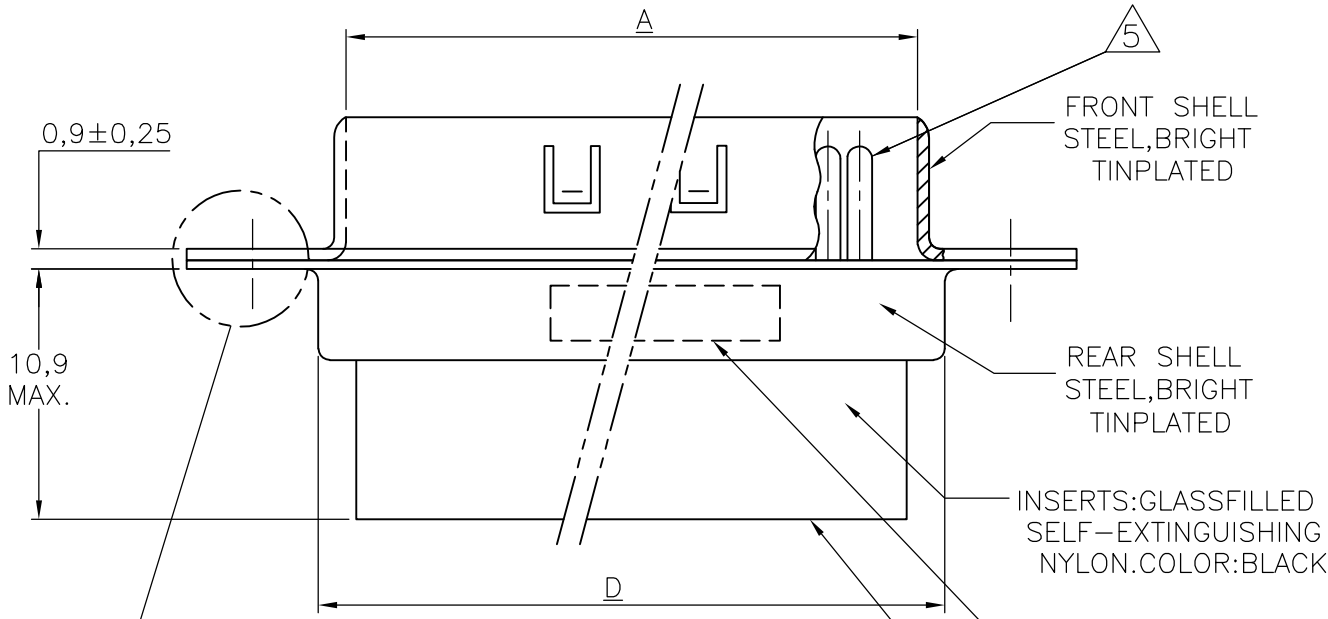

TE,TE CONNECTIVITY PARTNUMBER,
DATE CODE INK STAMPED

RAISED CAVITY
IDENTIFICATION. 6

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.MOOIJ	20NOV87	 TE Connectivity		
		CHK —	—			
DIMENSIONS: mm		APVD —	—	NAME HDP-20 PLUG CONNECTOR, SIZE 5		
		PRODUCT SPEC —	—			
		APPLICATION SPEC —	—	SIZE A3	CAGE CODE 00779	DRAWING NO C-167292
MATERIAL —		WEIGHT —	—	RESTRICTED TO —		REV M2
		FINISH —	—	SCALE NTS	SHEET 2 OF 2	REV M2
CUSTOMER DRAWING						