



3



P.C.B LAYOUT

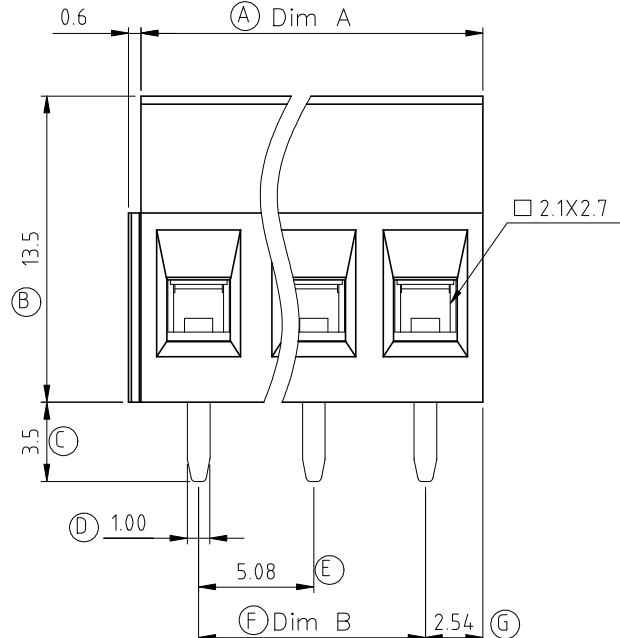

N=Number of contacts

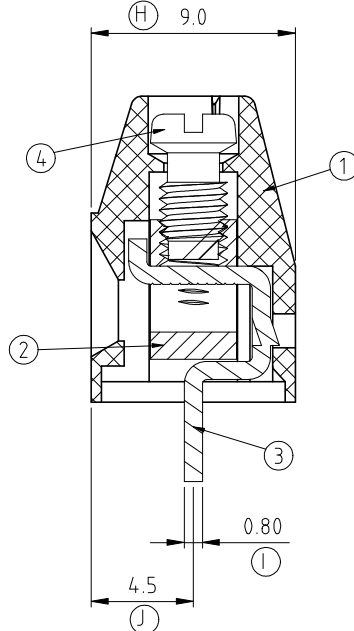

Poles	02	03	04	05	06	07	08	09	10	11	12	13
Dim A			20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88	60.96	66.04
Dim B			15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88	60.96
TOL	±0.10				±0.15					±0.20		
Poles	14	15	16	17	18	19	20	21	22	23	24	
Dim A	71.12	76.20	81.28	86.36	91.44	96.52	101.60	106.68	111.76	116.84	121.92	
Dim B	66.04	71.12	76.20	81.28	86.36	91.44	96.52	101.60	106.68	111.76	116.84	
TOL	±0.20		±0.25					±0.30				

SIGN	SIGN	DATE	DESCRIPTION	APPROVER
D		09/16/09	Poles is changed from 2p-24p to 4p-24p	Aaron
		09/16/09	Drawing NO. is changed from 8V10137 to 8V10302	Aaron
		07/27/20	Update the drawing frame	Rhine
		07/27/20	Add TUV certification	Rhine

THIS IS CAD DRAWING. DO NOT REVISE MANUALLY!!!

Material:

- Item 1 Terminal housing: Thermoplastic (UL 94V-0)
- Item 2 Clamp: Brass ,Ni plated
- Item 3 Wire guard solder pin: Brass ,Tin plated
- Item 4 Terminal screw: Steel Zinc plating"- "slot type

△ Electrical cULus TUV

- Voltage rating: 300VAC 250VAC
- Current rating: 16A 17.5A
- Wire range: 0.2-1.5mm²
- Solid wire(AWG): 12-28
- Stranded wire(AWG): 12-28
- Torque: 3.5Lb-In. 0.5N.m
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV 2.0KV
- Operating temperature: -40°C to +115°C
- Wave soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:  
- Critical dimension: 

VI xx 21 x 5 xxxx G

➔ Pb < 40,000ppm
(RoHS)

04	4 CONTACTS	0	Black (RAL9005)	000:"@“Logo (Standard)
05	5 CONTACTS	2	Red (RAL3001/D)	000A:"ANYTEK“Logo
...	...	3	Orange(RAL2011/P)	Any special item by
24	24 CONTACTS	4	Yellow(RAL1018/A)	customer request,
		5	Green(RAL6018/T)	please contact sales
		6	Blue (RAL5015/A)	department.
		8	Grey(RAL7035/D)	

Amphenol **ANYTEK**

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		VI 5.08 SERIES 4P-24P 180° wire inlet (without cover) Horizontal-solid block							△	
PART NO.		Vlx21x5xxxxG			DWG NO.		8VI0302		△	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.					Tolerance	
		Rhine 2020.07.27	Rhine 2020.07.27			UNIT: mm		X. ±0.50		
						SCALE: NONE		X.X ±0.30		
				SHEET: 01/01		REV: D		X.XX ±0.10		
								X° ±1°		