

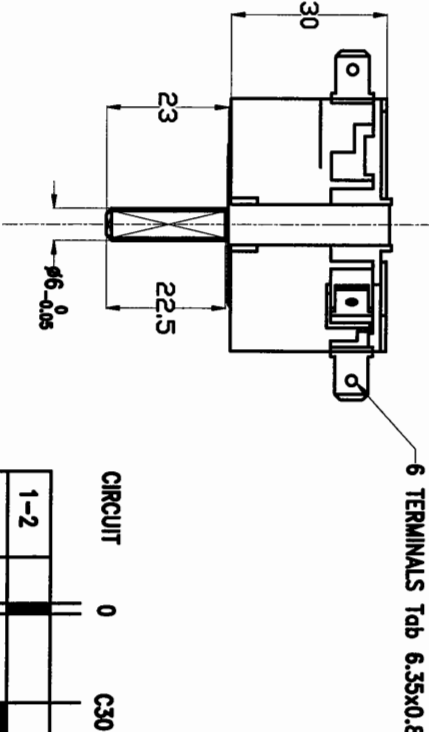


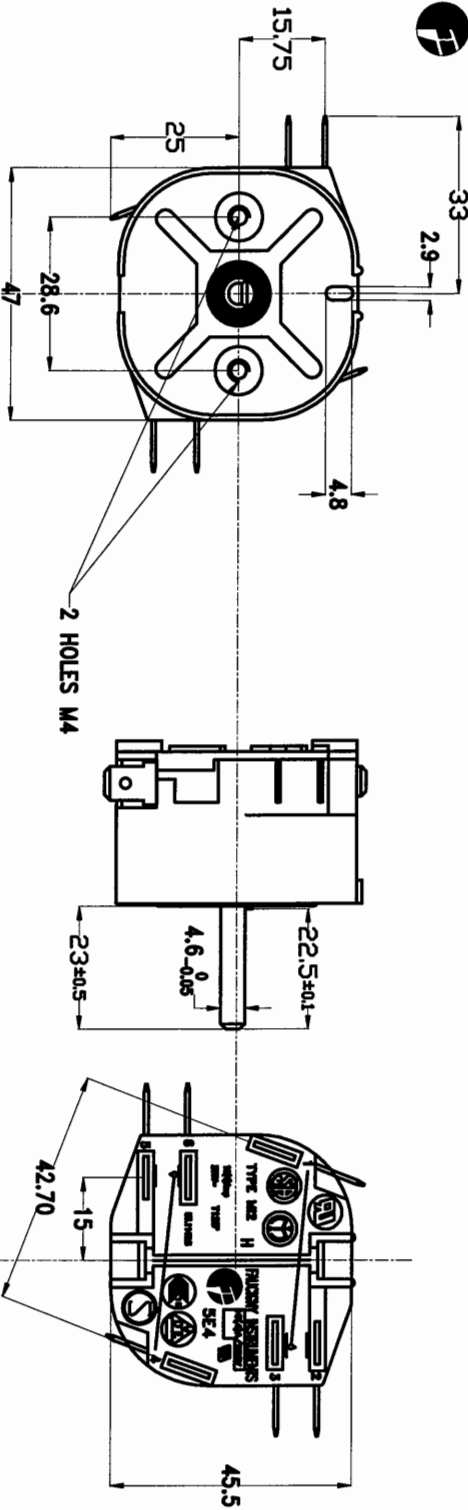

CIRCUIT	0	330	15°
1-2			
1-3			
4-6			
4-5			

0° 30° 330°

15°/300°

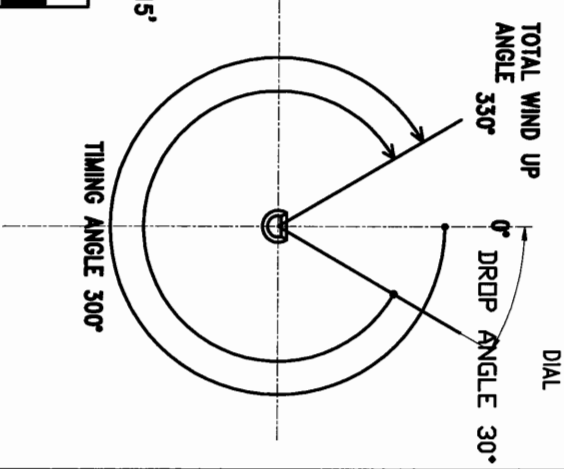

CHARACTERISTICS

ELECTRICAL CHARACTERISTICS

standard switch : CEE 24
Rated amperage : 16(4) A
Rated voltage : 250 V
Type of current : Vac
Switch configuration: DPDT
Switch for appliance classe II
Number of electrical operations : 10 000
connections terminal : 6.35 x 0.8

MECHANICAL CHARACTERISTICS

Winding torque : 1.5 to 4.5 Kg.cm
Return torque to zero position: 1 to 4.5 Kg.cm
timing : 15°
timing range : ±10%
Residual operating torque : 0.1 Kg.cm
Torque of manual position : /

THERMAL CHARACTERISTICS

Maximum temperature of use : 125° C

MARKING ON BACK CASE

Type MI2

T = 125°C
Identification of terminals

APPROVALS

UL- SEMKO- ENEC10 VDE- CSA- IMQ
16A 250V AC RESISTIVE
4A 250V AC INDUCTIVE

MARKING

Label of the timer : 4 numbers
week of production : 2 numbers
Year of production : 2 numbers

CUSTOMER : OEM ELECTRONICS SP Z.O.O.	WEIGHT BY 1000	USE: /
CUSTOMER PART NUMBER : MI2R206 15°	COLOR: BLACK	SETS MI2
MI2/15/300/330/144001/CS0/AM000/23/22.5/6.0MT4.6		2093 E
DRAWN BY : MARTINET.C	DATE: 16/02/10	SCALE: 1/1
FAUCIGNY INSTRUMENTS		