


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER*	WEIGHT lbs/100 pcs (g)/100 pcs	USE WITH ANY OF THESE CABLE TIE CROSS-SECTIONS	MAX. SCREW SIZE
MBMS-S10Y	.123 (55.8)	MINIATURE INTERMEDIATE STANDARD	#10 (M5)

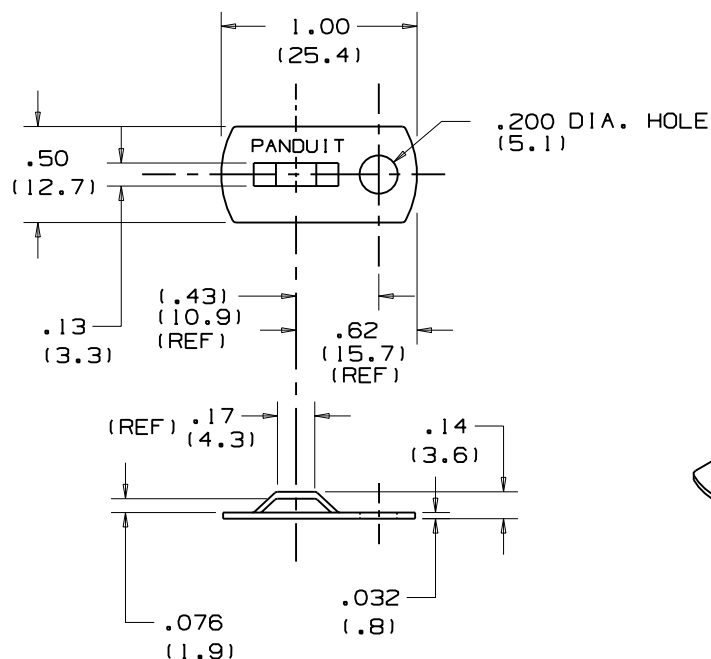

NOTES:

1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
2. MATERIAL: ALUMINUM ALLOY - 3003-H14 (HALF HARD, TEMPER).
3. FINISH: RoHS COMPLIANT TCP COATING
CORROSION RESISTANCE: 168 HRS SALT SPRAY PER ASTM-B-117

DIMENSIONS IN BRACKETS ARE METRIC [mm]			
CAD FILENAME/LAYERS			
 CORP. TINLEY PARK, ILLINOIS			
MBMS-S10Y METAL MOUNT			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ±0.05 (1.3) (.XXX) ±0.010 (0.25) (.XX) ±0.02 (0.5) ANGLES ± 5°		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
DRAWN BY JAD	MAT'L: SEE NOTE 2,3		SCALE NONE
DATE 7/27/06			DRAWING NO. GB0239LW
CHK'D			DWG A SIZE