

圖號 DRAWING No. :		校訂版次 REVISIONS																	
品名 NAME: Bullet	ITEM No. :	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 10%;">版次</th> <th style="width: 50%;">記述 DESCRIPTION</th> <th style="width: 20%;">DATE</th> <th style="width: 20%;">核可</th> </tr> <tr> <td>1</td> <td>新增產品</td> <td>104/07/16</td> <td>ANDY</td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </table>	版次	記述 DESCRIPTION	DATE	核可	1	新增產品	104/07/16	ANDY									
版次	記述 DESCRIPTION	DATE	核可																
1	新增產品	104/07/16	ANDY																

MAXIMUM ELECTRIC CURRENT


A. W. G	22	20	18	16	14	12	10
MAX AMP	3	4	7	10	15	20	24


NOTE:

1. MAXIMUM ELECTRICAL RATING: 75°C 300 VOLTS
2. WIRE RANGE: 22-16 AWG / 0.5-1.5 mm²
INSULATED COLOR: RED
3. WIRE RANGE: 16-14 AWG / 1.5-2.5 mm²
INSULATED COLOR: BLUE
4. WIRE RANGE: 12-10 AWG / 4-6 mm²
INSULATED COLOR: YELLOW
5. MATERIAL THICKNESS: t
TOLERANCE: ±0.05



WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	B ±0.20	F ±0.30	L ±1.00	E ±0.60	D ±0.30	d1 ±0.20	t
22-16 AWG 0.5-1.5 mm ²	ST-040/R	4.0	8.5	21.0	10.0	4.0	1.7	0.4
		4.5	8.5	21.0	10.0	4.0	1.7	0.4
16-14 AWG 1.5-2.5 mm ²		4.0	8.5	21.0	10.0	4.5	2.3	0.4
		4.5	8.5	21.0	10.0	4.5	2.3	0.4
		5.0	8.5	21.0	10.0	4.5	2.3	0.4
12-10 AWG 4-6 mm ²		5.0	8.5	23.0	12.5	5.5	3.4	0.4

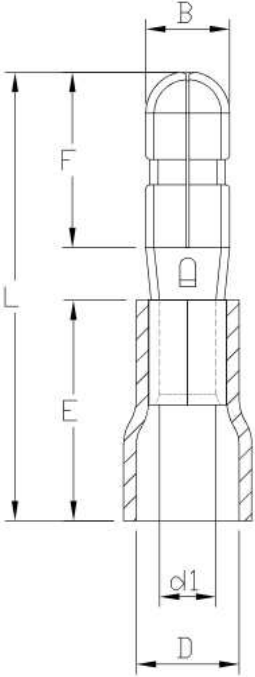

認可 APPROVALS		第三視角 THIRD VIEW 	MATERIAL	單位 UNIT	日期 DATE: 2015. 01. 05
製圖 DRAFT:	TINA		INSULATION: VINYL	m/m	
設計 DESIGN:	KEN		MATERIAL: BRASS	比例 SCALE	
核可 CHECKED:	ANDY		TIN PLATING		