


Packing List

For ref. MS10:



Front Filters for MSE 1 set

(Each set includes 5 filters)

Manual 1 unit


Ref. 0034152

0034152-200624

JBC

www.jbctools.com

INSTRUCTION MANUAL



MS10

Front Filters for MSE

MS10 filters are used with MSE-B.



MS10
Front Filter

MSE
Electric Desoldering
Module

Top side



Bottom side




www.jbctools.com




Replacement


Open the front lid of MSE by sliding down the side tabs. Remove the worn filter by pulling it upwards (1) out of the snap-fits of the seal.

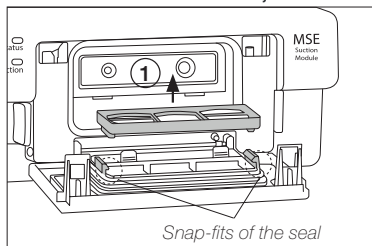

Position the new filter so that the black side is facing down (2) and the ribs at its long side are pointing backwards (3), towards the transparent ribs of the lid (4).

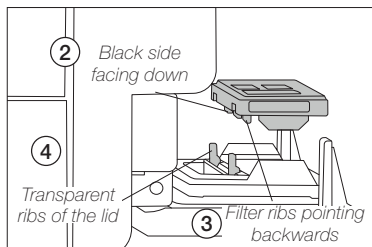

With the filter positioned flat between the snap-fits, push it back (5) until it stops against the transparent ribs.

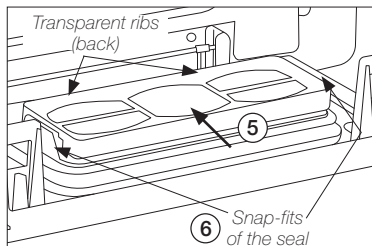

Make sure that the snap-fits of the seal are slot into the lateral recesses (6) of the filter frame. Close the lid by pressing against both upper corners until it clicks.