
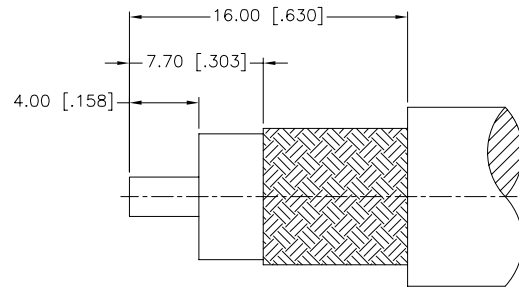
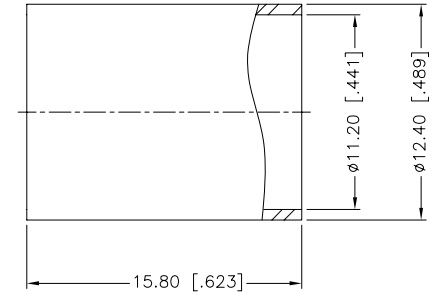
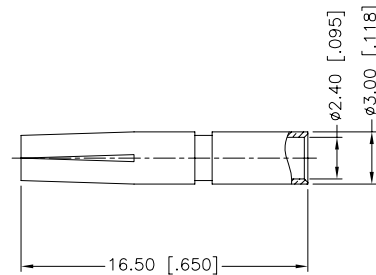


REV.	DATE	ECR NO.	DESCRIPTION
NC	09/15/09	XXXXXX	INITIAL RELEASE

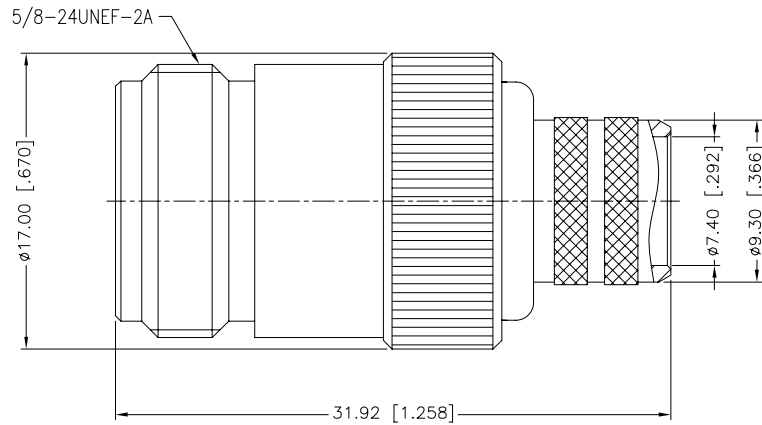

RECOMMENDED
CABLE STRIPPING DIM'S

- NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
 2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .100"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex									
					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm		DRAWN J.CHENG		09/15/09											
					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”		CHECKED									PART DESCRIPTION				
							ISSUED									N CRIMP JACK				
5	FERRULE	BRASS	ALBALOY	1			SHEET 1 OF 1				PART NO.									
4	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1							172209									
3	BARREL	BRASS	ALBALOY	1																
2	INSULATOR	PTFE	NATURAL	1																
1	BODY	BRASS	ALBALOY	1																

5	FERRULE	BRASS	ALBALOY	1
4	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
3	BARREL	BRASS	ALBALOY	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	ALBALOY	1
	DESCRIPTION	MATERIAL	FINISH	QTY

DO NOT SCALE DRAWING