
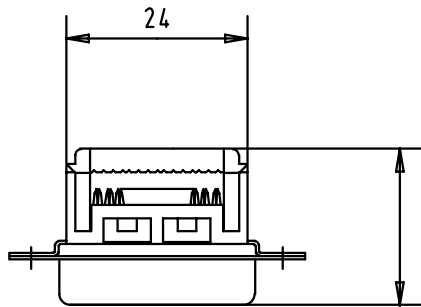


5 4 3 2 1

RECOMMENDED PANEL CUTOUT DIMENSIONS

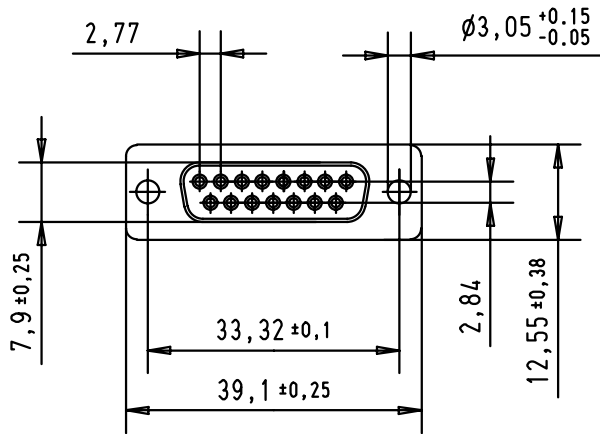

20,65 pre-crimping position
18,20 after crimping position

13,03±0,13-front mount
11,4±0,13-rear mount

6,52±0,13-front mount
5,71±0,13-rear mount


10°Typ. optional
(rear mount only)

30,53±0,13-front mount
28,80±0,13-rear mount


R3,5 max for front mounting

3,04 ±0,05

33,32 ±0,13



1.27 mm pitch flat cable stranded, wire sizes : AWG 26 to 28

09 66 218 7500	15	3						Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub female connector Insulation displacement termination through holes fixing	Maßstab/ Scale 1 : 1
09 66 218 6500	15	2					Detail.	09/07/01	S.H.			
09 66 218 5500	15	0.76 µm Au					Insp.					
				29771	16-AVR-02	CV	Stand.					
				29756	19-MAR-02	CV	HARTING ELEKTRONIK F-95972 Paris					
part number	No of contact	performance level		29697	09/07/01	S.H.						
				Mod.	Dat.	Name	Sub.					