


## Clamp-type test probe

### KLEPS 3 ST

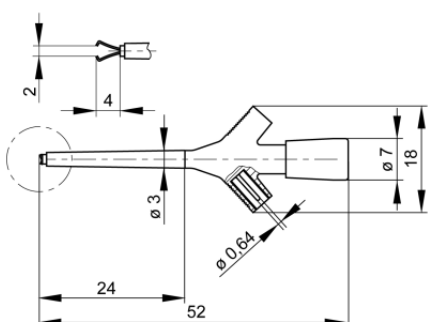

| Product                                                                        | KLEPS 3 ST                                                                                                                                                                                                                                                                                                                                                                            |
|--------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| description                                                                    | Miniature clamp-type test probe with rotating grip jaws. Suitable for very thin wires and densely packed contacts. Connects with MKL... and MAL...                                                                                                                                                                                                                                    |
| operating instruction                                                          | BA002                                                                                                                                                                                                                                                                                                                                                                                 |
| article-no. /<br>*colour                                                       | 9735921xx<br><div style="display: flex; justify-content: space-around; align-items: center;"><div style="text-align: center;"><br/>00<br/>black</div><div style="text-align: center;"><br/>01<br/>red</div></div> |
| drawing                                                                        |                                                                                                                                                                                                                                                                                                                                                                                       |
|                                                                                |                                                                                                                                                                                                                                                                                                   |
| technical data                                                                 |                                                                                                                                                                                                                                                                                                                                                                                       |
| connection                                                                     | unsprung pin Ø 0.64 mm                                                                                                                                                                                                                                                                                                                                                                |
| rated voltage <sup>(1)</sup>                                                   | 30 VAC / 60 VDC                                                                                                                                                                                                                                                                                                                                                                       |
| measurement cat. acc. to IEC 61010                                             | O <sup>(3)</sup>                                                                                                                                                                                                                                                                                                                                                                      |
| rated current <sup>(1)</sup><br>(consider derating curve)                      | 2 A                                                                                                                                                                                                                                                                                                                                                                                   |
| material plug                                                                  | brass, gold plated                                                                                                                                                                                                                                                                                                                                                                    |
| housing material                                                               | PBT                                                                                                                                                                                                                                                                                                                                                                                   |
| temperature range acc. To IEC61010 <sup>(2)</sup>                              | -25 °C to +70 °C                                                                                                                                                                                                                                                                                                                                                                      |
| flammability class acc. to UL 94<br>(only valid for basic material of housing) | HB                                                                                                                                                                                                                                                                                                                                                                                    |
| clamp type                                                                     | rotating grip jaws, tin plated                                                                                                                                                                                                                                                                                                                                                        |
| clamping range                                                                 | 2 mm                                                                                                                                                                                                                                                                                                                                                                                  |

0.64 mm system

|          |           |
|----------|-----------|
| standard | IEC 61010 |
|----------|-----------|

<sup>(1)</sup> for normal environmental conditions -5°C to +40°C

<sup>(2)</sup> contact the manufacturer for applications at deviating temperature ranges

<sup>(3)</sup> without rated measurement category, for other circuits that are not directly connected to mains

stand: 10.01.2019