
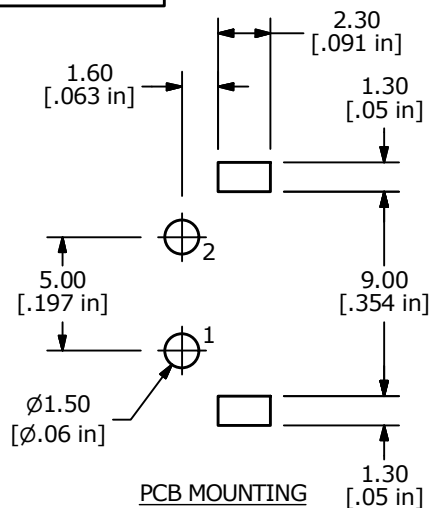
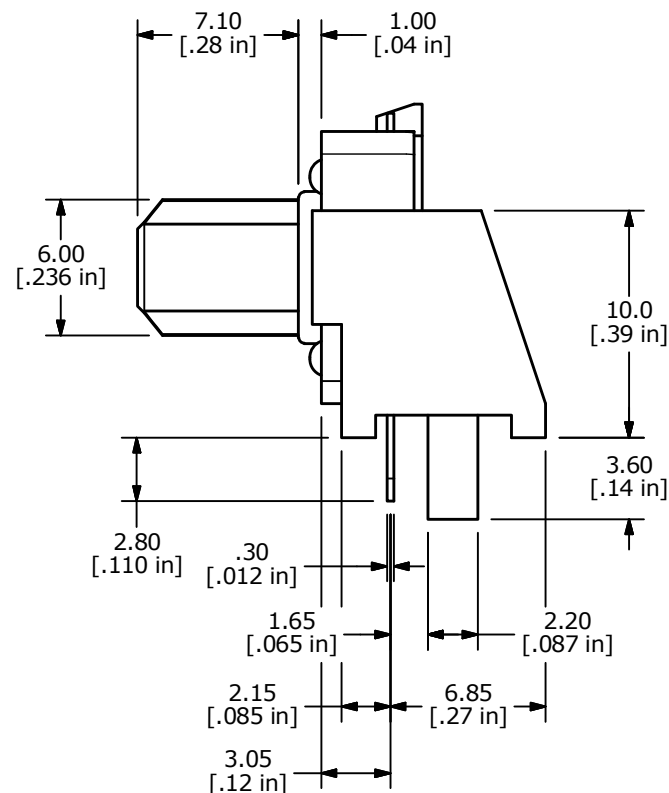
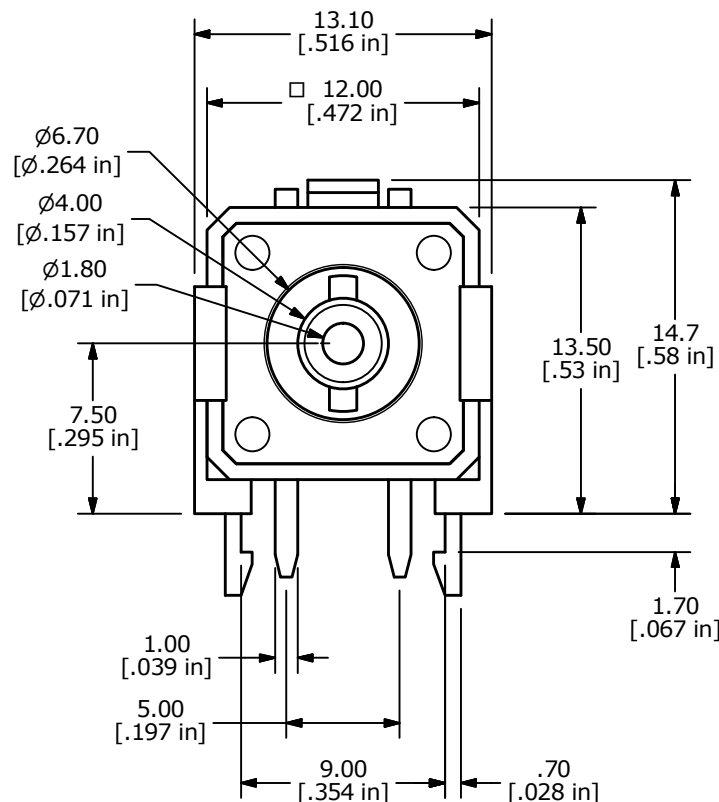


NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY
- ▲ 4. CONTACT RATING: 12VDC, 50mA
5. TRAVEL: 0.30 ± 0.15 mm
6. OPERATING FORCE: 260 ± 50 mm
7. CONTACT RESISTANCE: $100\text{m}\Omega$ MAX.
8. ELECTRICAL LIFE: 100,000 CYCLES
9. ▲ DENOTES CRITICAL PARAMETER
10. 2011/65/EU (ROHS) COMPLIANT
11. CONTACT MATERIAL: SILVER
- ▲ 12. PACKAGE: 450 PIECES PER POLYBAG

ACTUATOR
COLOR: BLACK

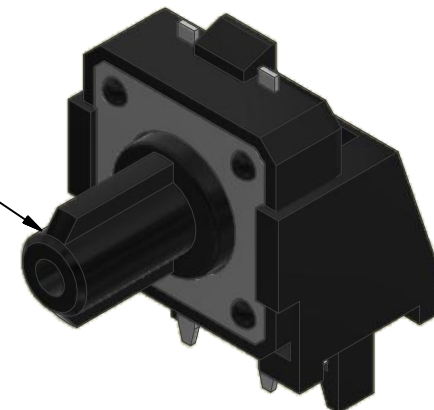

C	23971	drawing update	8/8/19	MW	TITLE TL1100GF160Q				
REV	PCR NO	DESCRIPTION	DATE	BY					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 3:1	DATE 8/22/1995	DR EBP	DWG P001103	REV C