


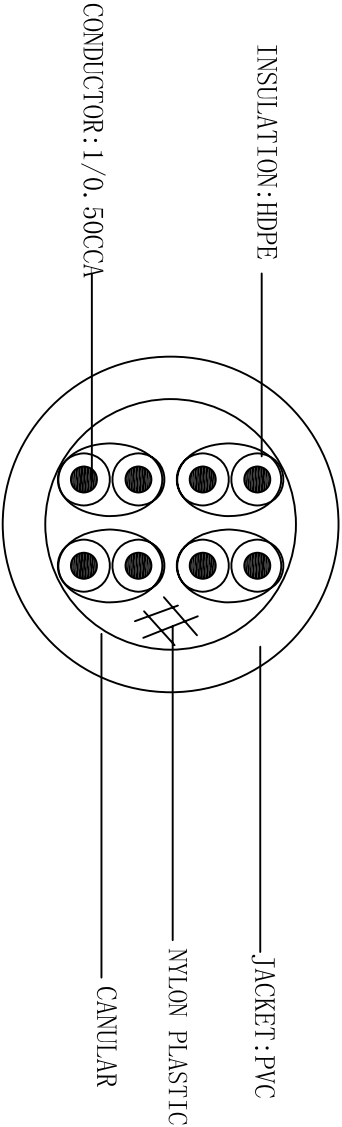

CONSTRUCTION:
[(1/0.50)*4P]CCA

CONSTRUCTION DESCRIPTION :

- 1. CONDUCTOR:1/0.50±0.005CCA
ID:0.92±0.02mm
MATERIAL:HDPE(210)
- 2. STANDING DIRECTION:RIGHT
- 3. FILLER:500D NYLON PLASTIC
- 4. OD:5.2±0.15mm
MATERIAL:45P PVC
COLOR:GREY

5. MAKING:

NETWORK SYSTEMS CABLE UTP ANSI TIA/EIA-568A 24AWG
(4PR) OR ISO/IEC11801 VERIFIED CAT 5e (001-305M)

6. PACKING:305M/R

CORE COLOR :

- blue/white&blue
- brown/white&brown
- orang/white&orang
- green/white&green

REMAKE:

- 1. THE ID AND OD OF THE WIRE MUST BE EXACT, CAN NOT REDUCE THE CENTRE.
- 2. THICKNESS OF COAT BY EQUALITY:0.5mm, THE LEAST THICKNESS:0.45mm
- 3. THICKNESS OF CORE BY EQUALITY:0.2mm, THE LEAST THICKNESS:0.18mm
- 4. Impedance:100Ω±15%
Rating temperature: -20°C to 60°C
Standards: ISO/IEC11801, ANSI TIA/EIA-568A

VCOM VCOM International Ltd.		DRING NO.	PRODUCT NO.	TITLE:						
		SAM-AC-033		CAT5E UTP 0.50CCA						
		APPROVED BY	CHECKED BY	DRAWN BY	CUSTOMER	PAGE	UNIT	SCALE		
				xiang		1 of 1	mm			REV
						A/0	RESCRPTION		DATE	
									2010-10-28	