

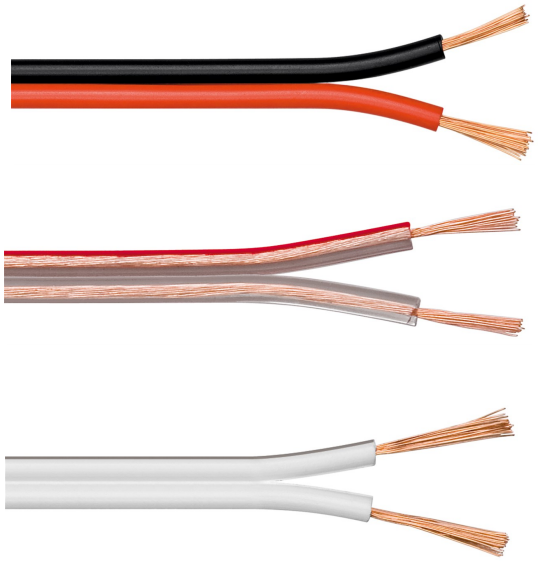
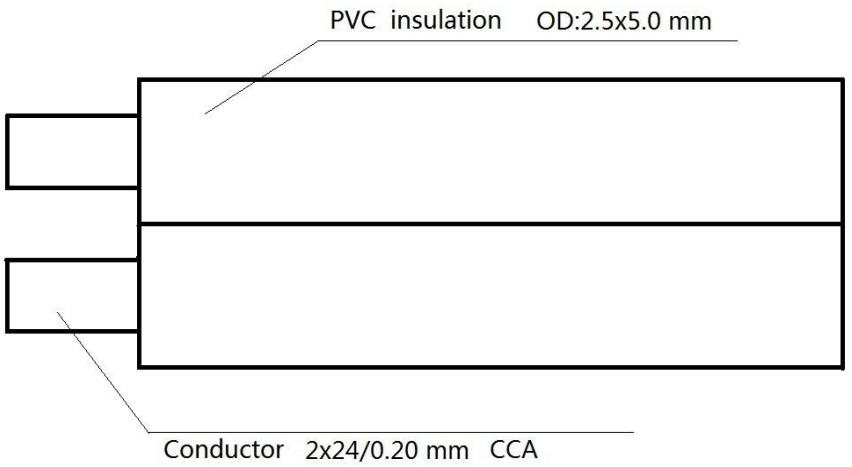


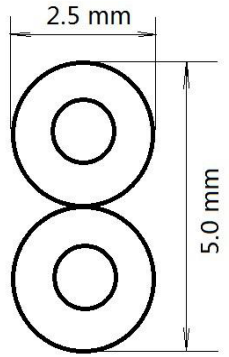



Product	Name	Speaker Cable				
Conductor	Material	Copper Coated Aluminum			Electrical Characteristics (20℃)	Max.Conductor DC Res at 20℃（Ω/M） 0.0
	Nom.O.D. (mm)	2x24/0.20 ($2x0.75mm^2$)	Up	+0.02		
			Down	-0.02		Rated Voltage (V)
Jacket	Extemal O.D.	2.5mm×2c	Up	+0.05	Sheath Physical Properties	Rated Temperature(70℃
			Down	-0.05		
	Surface	Smooth			View	
	Material	PVC(complies RoHS Reach) CPR(Eca)			Drawn By	
					Page	

no.	Packaging	Length (m)	color
67719	Cable coil	10	transparent
67717	Cable coil	25	transparent
67718	Cable coil	50	transparent
15018	Cable Reel	100	transparent
67744	Cable coil	10	white
67745	Cable coil	25	white
67746	Cable coil	50	white
27521	Cable Reel	100	white
67728	Cable coil	10	red/black
67730	Cable coil	25	red/black
67731	Cable coil	50	red/black
15022	Cable Reel	100	red/black

Eca Fire class (CPR) according to DIN EN 13501-6

Änderungen			Datum	Name
Datum	Name	gez.:	12.08.2021	TL
12.08.2021	TL	gepr.:		
		Norm:		
		Änderungen vorbehalten / *Subject to change*		

Bezeichnung	Blatt
LSK 2x0,75mm²	1/1
Zeichnungs-Nr.: 27521|15018|15022|67746|67718|67731|67745| 67717|67730|67744|67719|67728	von

sales@prom-elec.com / ООО ПРОМЭЛЕКТРОНИКА