HIRSCHMANN® Test & Measurement
A BRAND OF SKS

SKS Kontakttechnik GmbH

Crocodile clips

AK 2 B 2540 I

Product	AK 2 B 2540 I
description	Contact-protected, high-strength, wide-opening alligator clip. Clamping range up to 30mm bolt diameter. Solid wire clip, U-shaped and fine wire section. Nickel-plated brass connecting socket, pluggable with 4mm safety measuring leads.
operating instruction	BA465
article-no. / *colour	9724051xx 00 black 01 red 02 blue 03 yellow 04 green 88 yellow green Ni
drawing	
	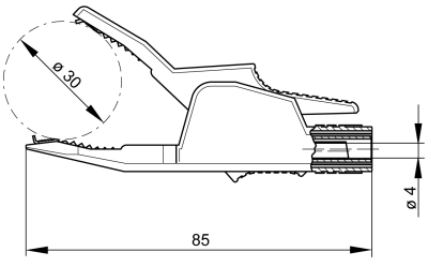
technical data	
connection	unsprung socket 4 mm
rated voltage(1)	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT II
rated current(1) (consider derating curve)	32 A
material socket	brass, nickel plated
housing material	PP
temperature range acc. To IEC61010(2)	-30 °C to +90 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	HB

4 mm safety system

sales@prom-elec.com / ООО ПРОМЭЛЕКТРОНИКА

clamping range	30 mm
standard	IEC 61010

(1) for normal environmental conditions -5°C to +40°C
(2) contact the manufacturer for applications at deviating temperature ranges
stand: 28.07.2020