



Electro-magnetic Transducer

Shape



Type(型号)	SMT1205XH10	SMT1209XH10	SMT1212XH10
Rated Voltage(额定电压)	5V _{DC}	9V _{DC}	12V _{DC}
Operating Voltage(电压范围)	4...7V _{DC}	7...11V _{DC}	8...15V _{DC}
a) Current(电流)	Max. 30mA		
a) Sound Output(输出声压)	min. 85dB at 10cm		
a) Resonant Frequency(谐振频率)	2300±300Hz		
Operating Temperature(工作温度)	-40...+85 °C		
Storage Temperature(储存温度)	-40...+85 °C		
Weight(重量)	2g		
a)Value applying rated voltage.			

Dimension

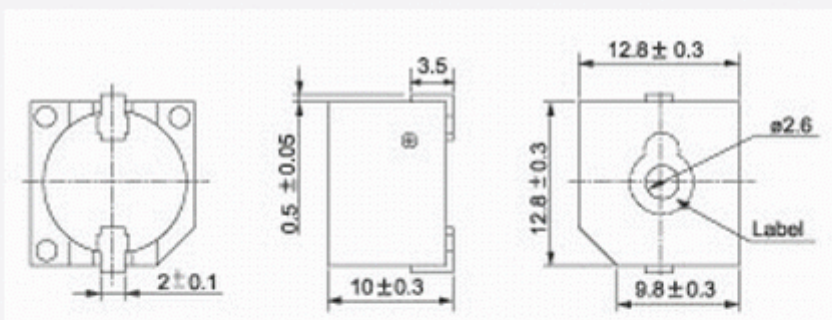

Characteristic

