
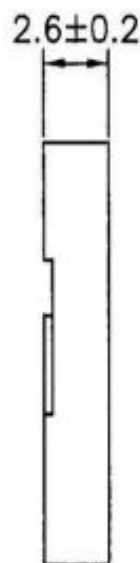
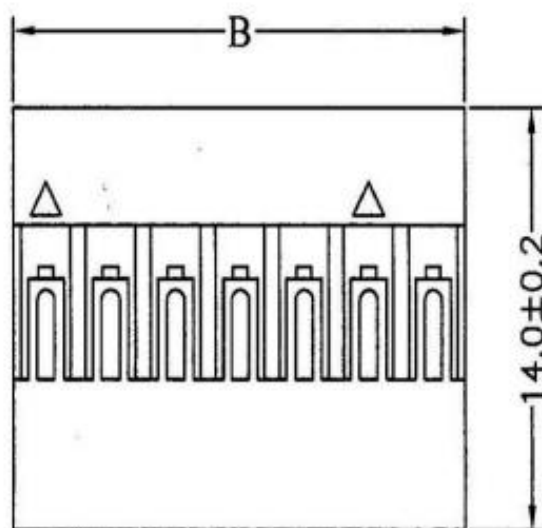


# NOTES

- \* Poles:1-40
- \* Material:NORYL UL94V-1 BLACK
- Specifications
- \* Current rating: 3A AC, DC
- \* Voltage rating: 250V AC, DC
- \* Temperature range: -25°C~+85°C
- \* Insulation resistance: 1,000MΩ min.
- \* Withstand voltage: 800V AC/minute

## "A"&"B" DIM. TOLERANCE

1P ~ 10P±0.20  
11P~20P±0.25  
21P~30P±0.35  
31P~40P±0.45

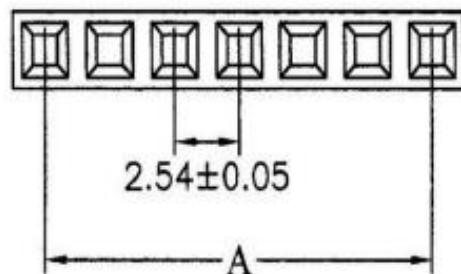

| CKTS | DIM. "A" | DIM. "B" |
|------|----------|----------|
| 1    |          | 2.65     |
| 2    | 2.54     | 5.19     |
| 3    | 5.08     | 7.73     |
| 4    | 7.62     | 10.27    |
| 5    | 10.16    | 12.81    |
| 6    | 12.70    | 15.35    |
| 7    | 15.24    | 17.89    |
| 8    | 17.78    | 20.43    |
| 9    | 20.32    | 22.97    |
| 10   | 22.86    | 25.51    |
| 11   | 25.40    | 28.05    |
| 12   | 27.94    | 30.59    |
| 13   | 30.48    | 33.13    |
| 14   | 33.02    | 35.67    |
| 15   | 35.56    | 38.21    |
| 16   | 38.10    | 40.75    |
| 17   | 40.64    | 43.29    |
| 18   | 43.18    | 45.83    |
| 19   | 45.72    | 48.37    |
| 20   | 48.26    | 50.91    |
| 21   | 50.80    | 53.45    |
| 22   | 53.34    | 55.99    |
| 23   | 55.88    | 58.53    |
| 24   | 58.42    | 61.07    |
| 25   | 60.96    | 63.61    |
| 27   | 66.04    | 68.69    |
| 30   | 73.66    | 76.31    |
| 32   | 78.74    | 81.39    |
| 34   | 83.82    | 86.47    |
| 36   | 88.90    | 91.55    |
| 40   | 99.06    | 101.71   |

RoHS  
Compliant

*Ninigi*

APPD.  
核准

DWG.  
製圖

DATE 制表日

2022/6/20

SCALE  
比例

UNIT  
單位

PAGE  
張數

1 OF 1

TOLERANCE  
容許公差

SIZE  
紙張尺寸

REV.  
版次

B

PART NAME 品名

2.54mm HOUSING SINGLE ROW 1X??P  
WITHOUT BUMP BLACK COLOR ROHS

PART NO.

料號

NSR-XX