
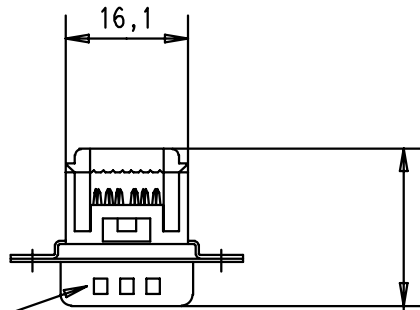


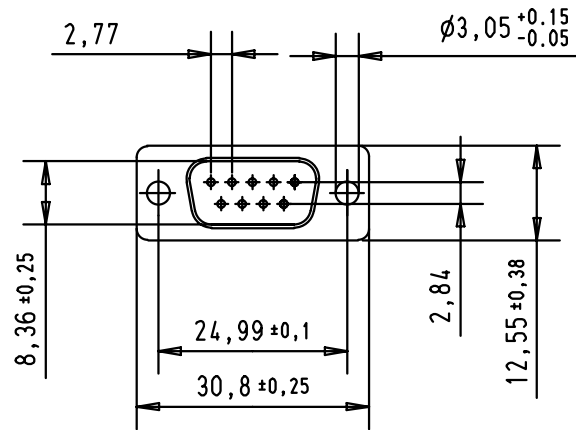

Dimples
20,80 pre-crimping position
18,35 after crimping position

RECOMMENDED PANEL CUTOUT DIMENSIONS

13,03±0,13-front mount
11,4±0,13-rear mount


6,52±0,13-front mount
5,71±0,13-rear mount

10° Typ. optional (rear mount only)


20,47±0,13-rear mount
22,2±0,13-front mount

R3,5 max for front mounting

3,04 ±0,05



1.27 mm pitch flat cable stranded, wire sizes : AWG 26 to 28

A	09 66 128 7700	9	3								 All Dim. in mm Orig. Size DIN A 4	D-Sub male connector Insulation displacement termination through holes fixing	Maßstab/ Scale 1 : 1
	09 66 128 6700	9	2										
	09 66 128 5700	9	0.76 µm Au										
				29771	16-APR-02	CV							
				29756	19-MAR-02	CV					HARTING ELEKTRONIK F-95972 Paris	TB 0966 128 x700	Blatt/ Page 1
				29692	03-JUL-01	SH							
				Mod.	Dat.	Name							
	part number	No of contact	performance level										