


nZ.

80-1489-xx

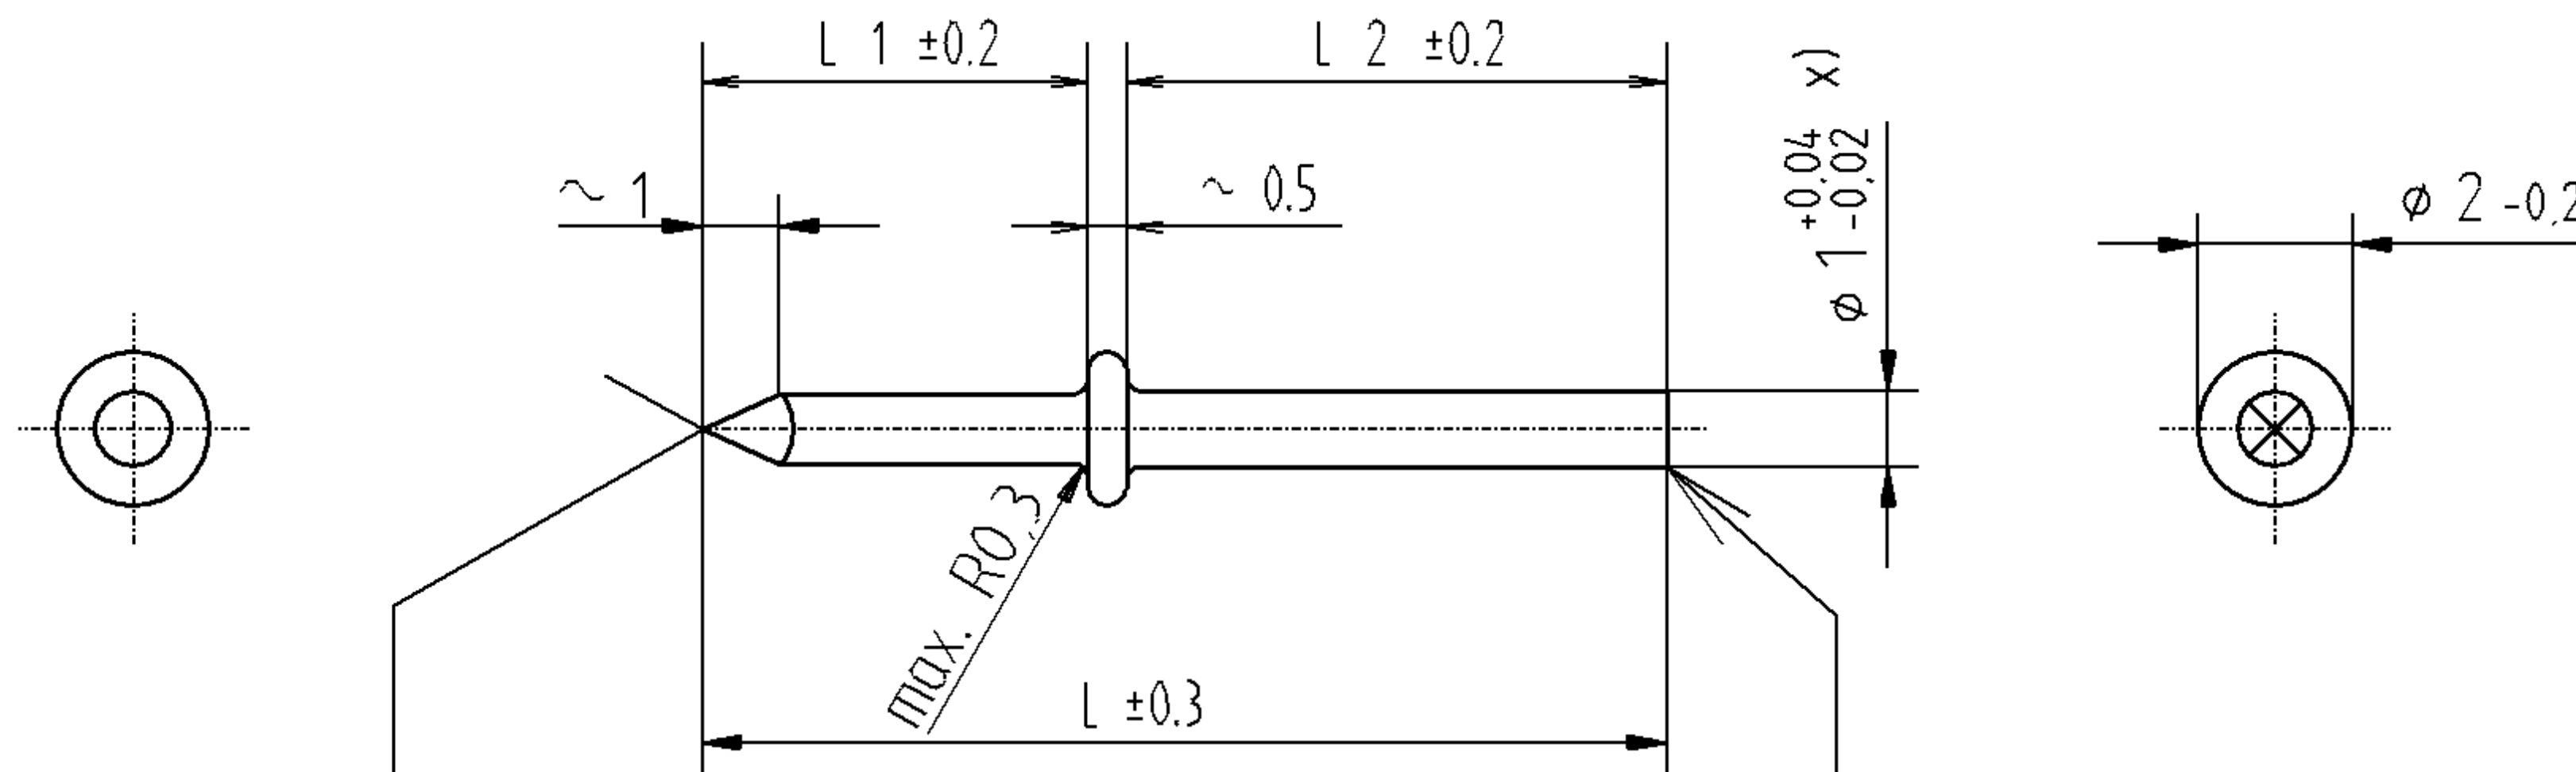

|      |     |     |             |
|------|-----|-----|-------------|
| 13,5 | 3,5 | 9,5 | 80-1489-61  |
| 12   | 3,5 | 8,0 | 80-1489-51  |
| 9    | 4,5 | 4,0 | 80-1489-41  |
| 15   | 8,5 | 6,0 | 80-1489-31  |
| 11   | 4,5 | 6,0 | 80-1489-21  |
| 10   | 3,5 | 6,0 | 80-1489-11  |
| L    | L1  | L2  | Artikel-Nr. |

|                    |                               |        |                             |                                                                                       |                                                                                  |                                           |                        |
|--------------------|-------------------------------|--------|-----------------------------|---------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|-------------------------------------------|------------------------|
| gezeichnet         | 5.1.99                        | Völkel | Werkstoff<br><br>CuZn37 F44 |  | OSTERRATH GmbH & Co.KG<br>Verbindungstechnische Präzision<br>D-57334 BAD LAASPHE |                                           |                        |
| geprüft            | 20.04.10                      | Völkel |                             |                                                                                       |                                                                                  |                                           |                        |
| Maßstab<br><br>5:1 | Benennung<br><br>Kontaktstift |        |                             | Oberfläche (dm²/1000)<br><br>-                                                        | Allgemeintoleranz<br><br>DIN ISO 2768 m                                          | Zeichnung - Artikel Nr.<br><br>80-1489-xx | Bl. 1/1<br><br>Index B |