
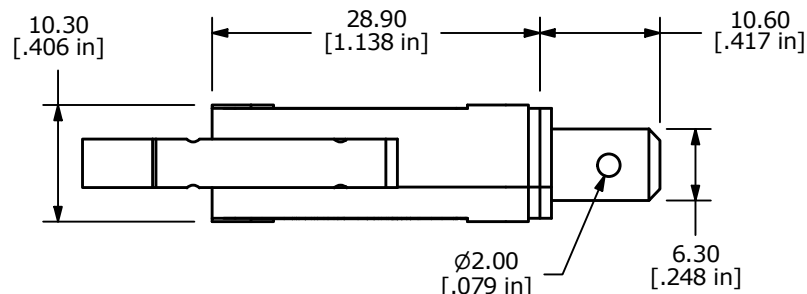




▲	O.P. (MM)	P.T. (MM)
	19.0±1.5	3.7 MAX.

O.P. = OPERATING POINT
P.T. = PRE-TRAVEL



NOTES:

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
 3. RATING: 15A @125/250VAC
 - ▲ 4. OPERATING FORCE: 50 ± 20 GRAMS
 5. OPERATING TEMP: -25°C TO 85°C
 6. ELECTRICAL LIFE: 50,000 CYCLES MIN.
 7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
 8. INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
 9. DIELECTRIC STRENGTH: 1500VAC 1 MINUTE (INITIAL VALUE)
 10. CONTACT RESISTANCE: 100 MILLI -OHMS MAX.
 11. ▲ DENOTES CRITICAL PARAMETER.

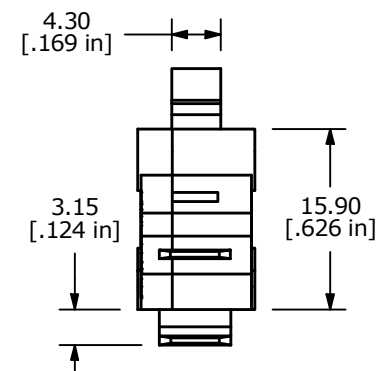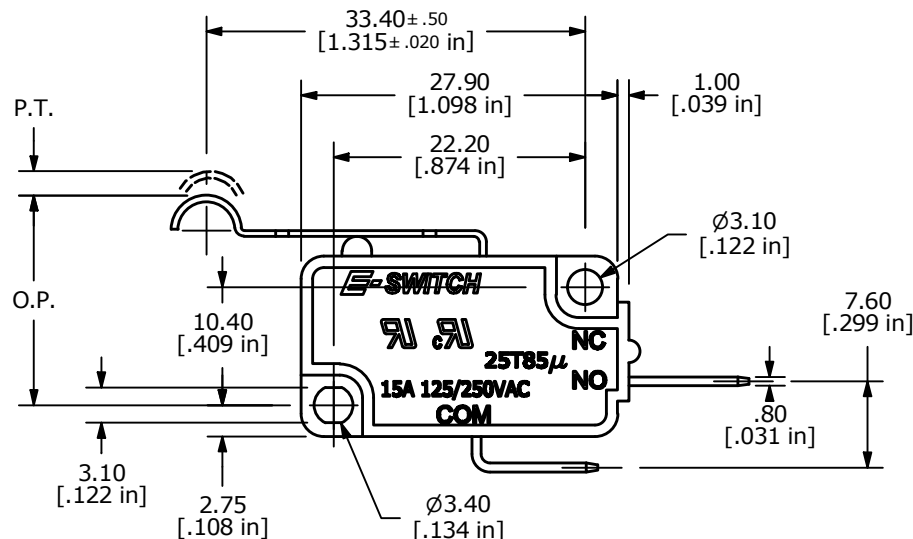

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
B	ECO-100836	REMOVE VDE RATING AND LOGO	04/18/22	JS						000021053
					TITLE					LS0851504F050C2C
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV	
					3:2	3/19/2009	BLR	Q950067	B	