

6

5

4







3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

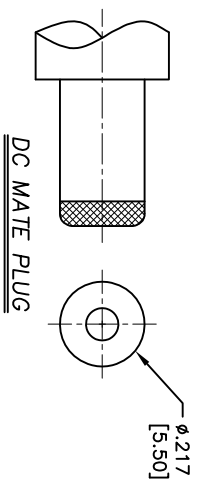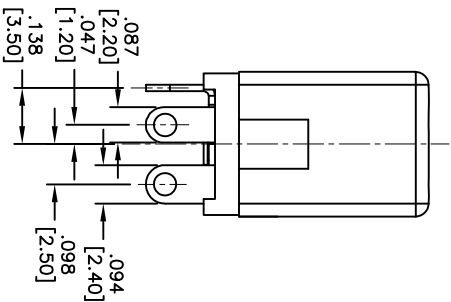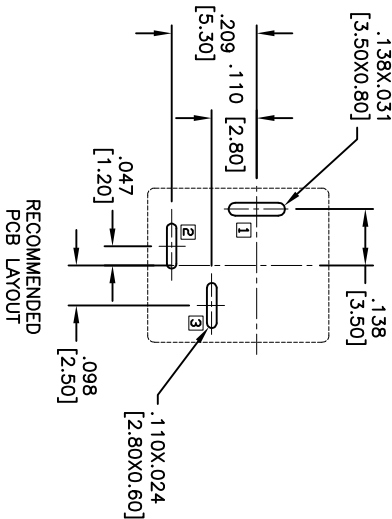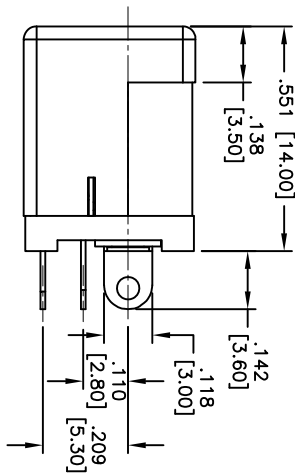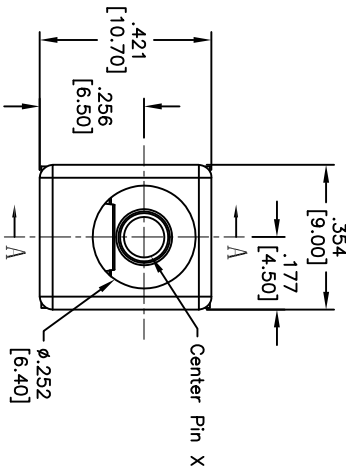

SPECIFICATIONS:

Material:

Insulator: PBT, Glass reinforced, rated UL 94V-0

Insulator color: Black

Center Pin: Brass, Nickel plated

Contacts: Copper Alloy

Plating:

Silver over Nickel underplate

Electrical:

Operating voltage: 20 VDC max.

Current rating: 3 Amp max.

Contact resistance: 30 mohms max. initial

Insulation resistance: 100 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute


Temperature Rating:

Operating temperature: -20°C to +70°C

Environmental:

Lead free, RoHS compliant

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/10/04	
A		REDESIGNED	8/2/06	
B		UPDATED & CORRECTED DIMENSIONS	11/03/06	
C		REVISED CURRENT RATING	3/20/09	
D		REDRAWN	1/17/12	
E		REVISED DIM.	5/31/12	



PART NO.	CENTER PIN DIA.
ADC-010-1	.079 [2.00]
ADC-010-2	.098 [2.50]
ADC-010-5	.092 [2.35]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

DC POWER JACK

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				Holes			
APPROVALS				DATE			
DRAWN	SS	10/4/04		SIZE	PART NO.	REV.	
CHECKED				X	ADC-010-X	E	
APPROVED				REF:	S00020C	SCALE: MTS	SHEET 1 OF 1