

ESD spiral cord for bracelet length 2.4 m yellow

Item No. **9-341-2**




EPA suitable. For working in electrostatically protected areas (ESD workplace / ESD protection zone).

Specification

highly elastic spiral cable
2 x 1 megaohm safety resistance
3 mm press button for wrist strap
10 mm press button for ground connection

length 700 to 2400 mm

weight 25 g

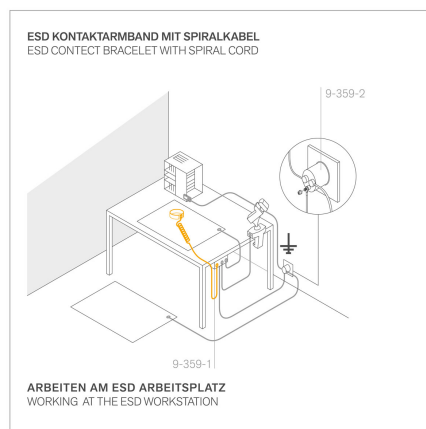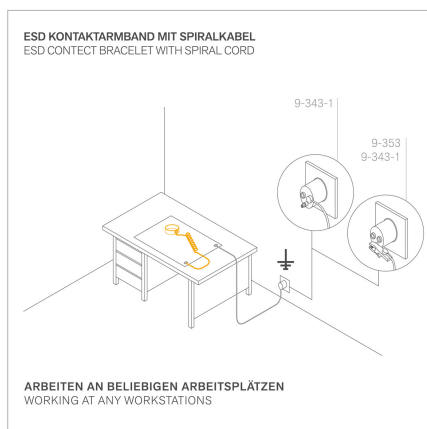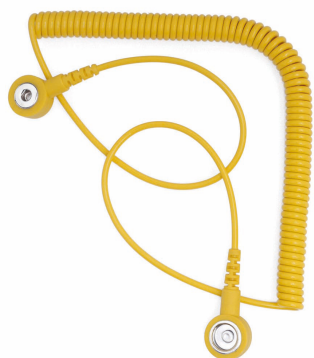

Application and technology

The coiled cable has a safety resistance of 1 MOhm on each connection side and is approved for workplaces with a rated voltage up to 250 VAC.