

Customer Information Sheet

DRAWING No.: M20-107XX00


IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION



ALL DIMENSIONS IN mm

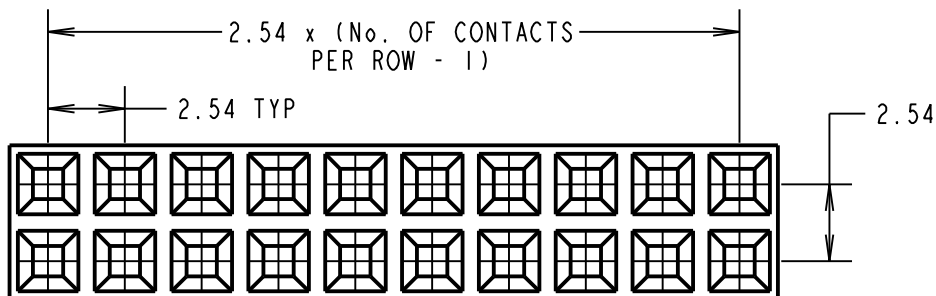

ORDER CODE:

M20-107XX00

No. OF CONTACTS PER ROW:
02 TO 12

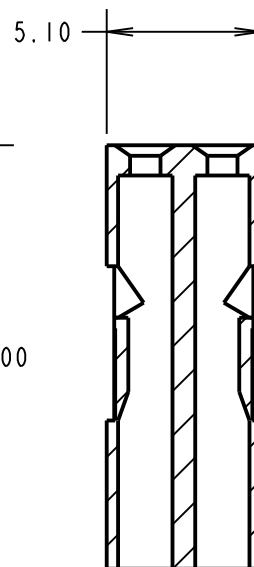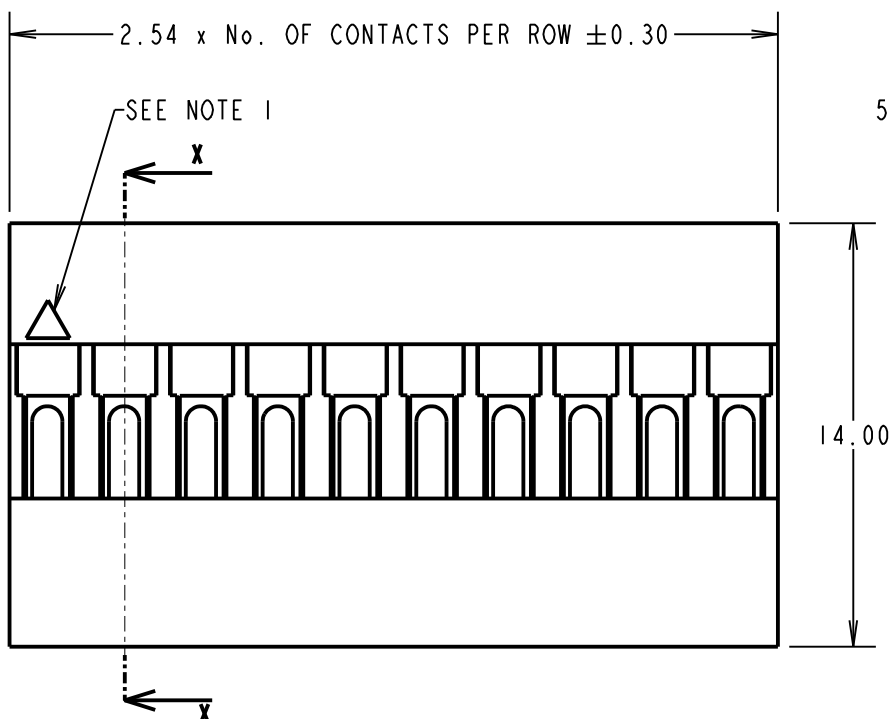

SECTION X-X

SPECIFICATIONS:

ELECTRICAL:

CURRENT RATING = 3A AC/DC

VOLTAGE RATING = 250V AC MAX

CONTACT RESISTANCE = 20mΩ MAX

INSULATION RESISTANCE = 1,000MΩ MIN

DIELECTRIC STRENGTH = 1,000 AC FOR 1 MINUTE

ENVIRONMENTAL:

TEMPERATURE RANGE = -25°C TO +85°C

NOTES:

- CONTACT No. 1 MARKER SYMBOL.
- FOR USE WITH CRIMP CONTACTS:
M20-11600XX (REELED CONTACTS),
M20-11800XX (LOOSE CONTACTS).
- THE ABOVE SPECIFICATIONS APPLY
WHEN THIS MOULDING IS USED
WITH THE SPECIFIC CONTACTS.
- FOR COMPLETE ELECTRICAL AND
MECHANICAL SPECIFICATIONS, SEE
COMPONENT SPECIFICATION C001XX
(LATEST ISSUE).
- MATING LENGTH = 6.30mm MAX
5.50mm MIN

MGP	8	15.02.21	22182
NAME	ISS.	DATE	CN/CO
APPROVED: MGP			
CHECKED: RA			
DRAWN: S.BENNETT			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

TOLERANCES
X. = ±1mm
X.X = ±0.50mm
X.XX = ±0.20mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

MATERIAL:
PPE+PS
UL94V-1 BLACK
FINISH:
S/AREA: mm²

TITLE:
2.54mm PITCH DIL
CRIMP MOULDING

DRAWING NUMBER:
M20-107XX00

SHT
2 OF 2